ABBREVIATIONS

&	AND	FA	FIRE ALARM	M.	MIRROR	SHO	SHOWER		
@	AT	FAB	FABRICATED	MACH	MACHINE	SHT	SHEET		
AB	ANCHOR BOLT	FBO	FURNISHED BY OTHERS	MB	MACHINE BOLT	SIM	SIMILAR		
ABV	ABOVE	FC	FLOOR COVERING	MAT.	MATERIAL(S)	SLV	SLEEVE		
A/C	AIR CONDITIONING	FD	FLOOR DRAIN	MAX	MAXIMUM	S.M.S.	STRUCTURAL METAL STUD		
ACC	ACCESS	FE	FIRE EXTINGUISHER	M.B.H.	MOP AND BROOM HOLDER	S.H.	SPRINKLER HEAD		
AD	AREA DRAIN	FEC	FIRE EXTINGUISHER CABINET	MBR	MEMBER	SYM.	SYMMETRICAL		
ADD	ADDENDUM	F.E.L.	FIRE EXTINGUISHER LOCKER	MECH	MECHANIC(AL)	SPKR.	SPEAKER		
ACFL	ACCESS FLOOR	FEM.	FEMALE	MED	MEDIUM	SNR	SANITARY NAPKIN RECEPTACLE		
ACT	ACOUSTICAL TILE	FFL	FINISH FLOOR LINE	MFR.	MANUFACTURE(ER)				
ADH	ADHESIVE	FH	FIRE HYDRANT	MFD	METAL FLOOR DECKING	SND	SANITARY NAPKIN DISPENSER		
ADJ	ADJACENT	FHC	FIRE HOSE CABINET	MIN	MINIMUM	SNT	SEALANT		
ADJT	ADJUSTABLE	FIN	FINISH(ED)	MISC	MISCELLANEOUS	SPC	SPACE		
AFF	ABOVE FINISH FLOOR	FJT	FLUSH JOINT	MMB	MEMBRANE	SPEC	SPECIFICATION(S)		
AGG	AGGREGATE	FLAM.	FLAMMABLE	MO	MASONRY OPENING	SQ	SQUARE		
ALT	ALTERNATE	FLASH.	FLASHING	M.H.	MANHOLE	SSK	SERVICE SINK		
ALUM	ALUMINUM	FLR	FLOOR(ING)	MOD	MODULAR, MODULE	SS	STAINLESS STEEL		
ANC	ANCHOR, ANCHORAGE	FLX	FLEXIBLE	MOV	MOVABLE	STA	STATION		
ANOD	ANODIZED	FLCO	FLOOR CLEANOUT	MRB	MARBLE	STD	STANDARD		
AP	ACCESS PANEL	FLUR	FLUORESCENT	MRD	METAL ROOF DECKING	STG	STORAGE, SEATING		
APPROX	APPROXIMATE(LY)	F.M.	FRAMED MIRROR	MTD.	MOUNTED	STL	STEEL		
ARCH	ARCHITECT(URAL)	FND	FOUNDATION	MTHR	METAL THRESHOLD	STR	STRUCTURAL		
ASC	ABOVE SUSPENDED CEILING	FOC	FACE OF CONC.	MTFR	METAL FURRING	SUR	SURFACE		
ASPH	ASPHALT(IC)	F.O.M.	FACE OF MASONRY	MTL.	METAL	SUSP	SUSPENDED		
AUTO	AUTOMATIC	F.O.S.	FACE OF STUDS	MULL	MULLION	SWR	SWITCH ROOM		
AVG.	AVERAGE	FR	FRAME (ING)	MWK	MILLWORK	SYS	SYSTEM		
<	ANGLE	FRA	FRESH AIR	MAS.	MASONARY	SW.	SWITCH		
ACOUS.	ACOUSTICAL	FRG	FORGED	MIR.	MIRROR	S.F.	SQUARE FOOT (FEET)		
		FS	FULL SIZE			S.Y.	SQUARE YARD		
B	BASE	FT	FOOT, FEET						
BRG	BEARING	FTG	FOOTING	N	NORTH	T	TREAD		
BPL	BEARING PLATE	FUR	FURRED(ING)	N.A.V.D	NORTH AMERICAN VERTICAL DATUM	T.B.	TOWEL BAR		
BJT	BED JOINT	FUT	FUTURE	N.G.V.D	NATIONAL GEODETIC VERTICAL DATUM	TEL	TELEPHONE		
BEL	BELOW					TEMP	TEMPERED		
BET	BETWEEN			NIC	NOT IN CONTRACT	THK	THICK(NESS)		
BVL	BEVELED			NL	NAILABLE	THR	THRESHOLD		
BIT	BITUMINOUS	GA	GAGE, GAUGE	NLR	NO LONGER REQUIRED	TOIL	TOILET		
BD	BOARD	GALV.	GALVANIZED	NO/#	NUMBER	T.O.B.	TOP OF BEAM		
BS	BOTH SIDES	GB	GYPSUM BOARD, GRAB BAR	NOM	NOMINAL	T.O.F.	TOP OF FOOTING		
BW	BOTH WAYS	GB	GRAB BAR	NMT	NONMETALIC	T.O.P.	TOP OF PARAPET		
BLK	BLOCK	GC	GENERAL CONTRACTOR	NR	NOISE REDUCTION	T.O.R.	TOP OF ROOF		
BLKG	BLOCKING	GCMU	GLAZED CONC. MASONRY UNIT	NRC	NOISE REDUCTION COEFFICIENT	T.O.S.	TOP OF SLAB		
BM	BEAM	GD	GRADE, GRADING			T.O.W.	TOP OF WALL		
B.M.	BENCH MARK	GF	GROUND FACE	N.T.S.	NOT TO SCALE	T.P.D.	TOILET PAPER DISPENCER		
B.O.F.	BOTTOM OF FOOTING	GI	GALVANIZED IRON			TPTN	TOILET PARTITION		
BOT	BOTTOM	GKT	GASKET(ED)			TV	TRASNFORMER VAULT, TELEVISION		
BRK	BRICK	GL	GLASS, GLAZING						
BRZ	BRONZE	GP	GALVANIZED PIPE			TYP	TYPICAL		
BLDG	BUILDING	G.L.	GRID LINE	OA	OVERALL	T.O.C.	TOP OF CONCRETE		
BUR	BUILT UP ROOFING	GLB	GLASS BLOCK	O.C.	ON CENTER	T.O.D.	TOP OF DECK		
BBD	BULLETIN BOARD	GLF	GLASS FIBER	OBS	OBSCURE	T.O.P.	TOP OF PARAPET		
B.O	BY OTHER	GN	GENERAL NOTES	O.D.	OUTSIDE DIAMETER	TER.	TERRAZO		
BRKT	BRACKET	GPL	GYPSUM LATH	OFF	OFFICE				
		GPT	GYPSUM TILE	OH	OVERHEAD				
		G.W.B.	GYPSUM WALL BOARD	OHMS	OVERHEAD MACHINE SCREW	UC	UNDERCUT		
CL	CENTER LINE	GP.PL.	GYPSUM PLASTER	OHWS	OVERHEAD WOOD SCREW	UL	UNDERWRITERS LABORATORY		
CAB	CABINET	GALV	GALVANIZED	OJ	OPEN-WEB JOIST	UNF	UNFINISHED		
CB	CATCH BASIN	GRN	GRANITE	OP	OPAQUE	UR	URINAL		
CEM	CEMENT	GSS	GALVANIZED STEEL SHEET	OPNG	OPENING	UON	UNLESS OTHERWISE NOTED		
CER	CERAMIC	GST	GLAZED STRUCTURAL TILE	OPH	OPPOSITE HAND	UVD	UPPER VEHICULAR DRIVE		
C.F.	COUNTER FLASHING	GT	GROUT	OPP	OPPOSITE				
CG	CORNER GUARD	GVL	GRAVEL	OPS	OPPOSITE SURFACE				
CHAM	CHAMFER								
C.HT	CEILING HEIGHT					VB	VINYL BASE		
C.I.	CAST IRON			PAR	PARALLEL	V.C.T.	VINYL COMPOSITION TILE		
C.I.P.	CAST-IN-PLACE			P.B.	PEGBOARD	VERT	VERTICAL		
CIRC	CIRCUMFERENCE	HB	HOSE BIBB	PB	PANIC BAR	VEST.	VESTIBULE		
CIR	CIRCLE	HBD	HARDBOARD	PBD	PARTICLE BOARD	VIF	VERIFY IN FIELD		
CJT	CONTROL JOINT	HC	HOLLOW CORE	PCC	PRECAST CONCRETE	VIN	VINYL		
CK	CALK OR CAULK (ING)	HCPD.	HANDICAPPED	PCG	POUNDS PER CUBIC FT.	V.W.C.	VINYL WALLCOVERING		
CLG	CEILING	HDR	HEADER	PED	PEDESTAL				
CLO.	CLOSET	HDW	HARDWARE	PERF	PERFORATE				
CLR	CLEAR (ANCE)	HES	HIGH EARLY-STRENGTH CEMENT	PERI	PERIMETER				
CLS	CLOSURE	HH	HANDHOLE	PE	PORCELAIN ENAMEL	W	WIDTH, WIDE		
CMU	CONCRETE MASONRY UNIT	HJT	HEAD JOINT	PFB	PREFABRICATE(D)	W/	WITH		
COL	COLUMN	HK	HOOK (S)	PFL	POUNDS PER LINEAL FT.	W	WEST, WIDTH, WIDE		
COMP.	COMPONENT	HM	HOLLOW METAL	PFN	PREFINISHED	WC	WATER CLOSET		
CONC	CONCRETE	HORIZ.	HORIZONTAL	PG	PLATE GLASS	WD	WOOD		
CONF	CONFERENCE	H.P.	HIGH POINT	PK	PARKING	W.D.	WINDOW DIMENSION		
CONST	CONSTRUCTION	HPS	HIGH PRESSURE SODIUM	PL	PROPERTY LINE, PLATE	WDW	WINDOW		
CONT	CONTINUOUS, CONTINUE	HT	HEIGHT	P. LAM.	PLASTIC LAMINATE	WG	WIRED GLASS		
CONTR.	CONTRACTOR	HTG	HEATING	PLAS	PLASTER	W.H.	WATER HEATER		
CPT	CARPET	HVAC	HEATING/VENTILATING/ AIR CONDITIONING	PLBG	PLUMBING	WM	WIRE MESH		
CR	CHROMIUM (PLATED)			PNL	PANEL	WO	WITHOUT		
C.R.	CURTAIN ROD	HWD	HARDWOOD	PNT	PAINT(ED)	WP	WATERPROOFING		
CSMT	CASEMENT	HWH	HOT WATER HEATER	P.P.	POWER POLE	WPT	WORKING POINT		
CT	CERAMIC TILE	HR	HOUR	PRF	PREFORMED	W.R.	WASTE RECEPTACLE		
CU.FT.	CUBIC FEET (FOOT)			PSC	PRESTRESSED CONC.	WR	WATER REPELLENT		
CU.IN.	CUBIC INCH	I.D.	INSIDE DIAMETER	PSF	POUNDS PER SQUARE FT.	WS	WATERSTOP		
CU.YD.	CUBIC YARD	IMP.	IMPERVIOUS	PSI	POUNDS PER SQUARE INCH	WSCT	WAINSCOT		
CBRD	CHALKBOARD	IN	INCH	P.T.	PRESSURE TREATED	WT	WEIGHT		
CONN.	CONNECTION	INCL	INCLUDE (ING) (D)	PT	POINT	WWF	WELDED WIRE FABRIC		
CORR.	CORRIDOR	INCIN	INCINERATOR	PTC	POST -TENSIONED CONCRETE	W/O	WITHOUT		
CTR.	CENTER	ILK	INTERLOCK	P.T.D.	PAPER TOWEL DISPENSER				
CTSK.	COUNTER SUNK	IPS	IRON PIPE SIZE	P.T.H.	PAPER TOWEL HOLDER				
		INS	INSULATE(D),(ION)	PTN	PARTITION				
		INSC	INSULATING CONC.	PTR	PAPER TOWEL RECEPTOR				
D	DRAIN	INT	INTERIOR	PV	PAVE (D) (ING)				
DA	DOUBLE ACTING	INSF	INSULATING FILL	PVMT	PAVEMENT				
DBL	DOUBLE	INTM	INTERMEDIATE	P.V.C.	POLYVINYL CHLORIDE				
DEM	DEMOLISH, DEMOLITION	INV.	INVERT	PWD	PLYWOOD				
DEPT.	DEPARTMENT	INFO.	INFORMATION	PCPL	PORTLAND CEMENT PLASTER				
DTL	DETAIL			PHP	PARTIAL HEIGHT PARTITION				
DIAG	DIAGONAL			PR.	PAIR				
DIA	DIAMETER								
DIM	DIMENSION	JAN.	JANITOR	QT	QUARRY TILE				
DIV.	DIVISION	JST.	JOIST	QTY	QUANTITY				
DMT	DEMOUNTABLE	JC	JANITOR'S CLOSET						
DN	DOWN	JF	JOINT FILLER	R	RISER, RUBBER				
D.O.	DOOR OPENING	JT	JOINT	RAD	RADIUS				
DPR	DAMPER			RBT	RABBET, REBATE				
DR	DOOR	KO	KNOCK OUT	R.C.P.	REINFORCED CONCRETE PIPE				
D.F.	DRINKING FOUNTAIN	KIT	KITCHEN	RD	ROOF DRAIN				
DIA.	DIAMETER DOWNSPOUT	KPL	KICKPLATE	RECT.	RECTANGULAR				
DWG	DRAWING	KCPL	KEENE'S CEMENT PLASTER	REINF	REINFORCE(ING)				
DWR	DRAWER			REQ	REQUIRED				
DISP.	DISPENCER			RES	RESILIENT				
D.S.	DOWNSPOUT	L	LENGTH	REV	REVISION(S), REVISED				
		LAB	LABORATORY	RFL	REFLECT (ED) (IVE) (OR)				
		LAD	LADDER	REFR	REFRIGERATOR				
E	EAST	LAM	LAMINATE(D)	RH	RIGHT HAND				
EA	EACH	LAV	LAVATORY	RL	RAIL(ING)				
E/A	EXHAUST AIR	LB	LAG BOLT	RM	ROOM				
E.H.D.	ELECTRIC HAND DRYER	LBL	LABEL	RO	ROUGH OPENING				
EXP.B	EXPANSION BOLT	LC	LIGHT CONTROL	ROW	RIGHT OF WAY				
EL ELV	ELEVATION	LL	LIVE LOAD	RWC	RAINWATER CONDUCTOR				
ELEV.	ELEVATOR	L.L.H.	LONG LEG HORIZONTAL	REF.	REFERENCE				
ELEC	ELECTRIC(AL)	L.L.V.	LONG LEG VERTICAL	RF.	ROOF				
EMERG	EMERGENCY	LMS	LIMESTONE	R.B.	RUBBER BASE				
ENCL.	ENCLOSURE	LP	LIGHT PROOF						
EP	ELECTRICAL PANELBOARD	L.P.	LIGHT POLE	S	SOUTH				
EQ	EQUAL	LPT	LOW POINT	S/A	SUPPLY AIR				
EQUIP	EQUIPMENT	LT	LIGHT	SAN	SANITARY				
EW	EACH WAY	LTL	LINTEL	SC	SOLID CORE				
EXH	EXHAUST	LVR	LOUVER	SCH	SCHEDULE				
EXIST.	EXISTING	LH	LEFT HAND	S.D.	SOAP DISPENSER				
EXPD	EXPOSED	LVD	LOWER VEHICULAR DRIVE	SEC	SECTION				
EXP. JT.	EXPANSION JOINT	LW	LIGHT WEIGHT	SFGL	SAFETY GLASS				
EXT	EXTERIOR	LWC	LIGHTWEIGHT CONC.	SH	SHELF, SHELVING				
EWC	ELECTRIC WATER COOLER	LKR.	LOCKER	S.H.	SOAP HOLDER				

DOOR CRITERIA AND GENERAL NOTES

1. ALL DOORS ARE LISTED IN THE DOOR SCHEDULE

DIMENSIONING CRITERIA

DIMENSIONS FOR LOCATING PARTITIONS AND OPENINGS ARE GENERALLY ESTABLISHED BY CRITERIA. ONLY EXCEPTIONS TO THESE CRITERIA WILL BE DIMENSIONED. TYPICAL DIMENSIONING CRITERIA ARE OUTLINED BELOW.

1. COLUMN IDENTIFICATION: DETAILS WILL GOVERN ALL DIMENSIONS AND FEW DIMENSIONS WILL BE SHOWN ON THE SMALL SCALE PLANS. COLUMN GRIDS ARE REPRESENTED THUS:



2. PARTITIONS CENTERED ON COLUMN OR GRID LINES WILL NOT BE DIMENSIONED ON THE SMALL SCALE PLANS BUT WILL BE DRAWN ACCORDINGLY:



3. PARTITIONS WITH THE FINISH FACE FLUSH WITH THE FINISH FACE OF THE COLUMN WILL NOT BE DIMENSIONED ON THE SMALL SCALE PLANS BUT WILL BE DRAWN ACCORDINGLY.



4. PARTITIONS CENTERED ON WINDOW MULLIONS WILL NOT BE DIMENSIONED ON SMALL SCALE PLANS BUT WILL BE DRAWN ACCORDINGLY:



5. PARTITIONS WITH FINISH FACE LYING ON THE COLUMN OR GRID LINES WILL NOT BE DIMENSIONED ON THE SMALL SCALE PLANS BUT WILL BE

DRAWN ACCORDINGLY:



6. FOR OPENINGS IN PARTITIONS OR WALLS:

A. WHEN ONE OCCURS AT A COLUMN OF GRID LINE, NO DIMENSIONS WILL BE SHOWN ON THE SMALL SCALE PLANS. THE OPENING WIDTH WILL BE ESTABLISHED BY EITHER CRITERIA OR SCHEDULES:

B. WHEN NEITHER JAMB OCCURS AT A COLUMN OR GRID LINE, ONE JAMB WILL BE LOCATED DIMENSIONALLY BY THE DETAIL:

C. WHEN ONE JAMB IS LOCATED BY A PARTITION AT A RIGHT ANGLE, THE FOLLOWING DIAGRAM APPLIES:

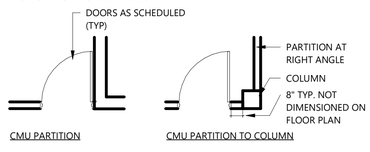



7. DIMENSIONS ON PLANS ARE SHOWN TO THE FACE OF MASONRY UNITS, FACE OF CONCRETE AND TO THE CENTERLINE OF METAL STUDS.

GRAPHIC SYMBOLS

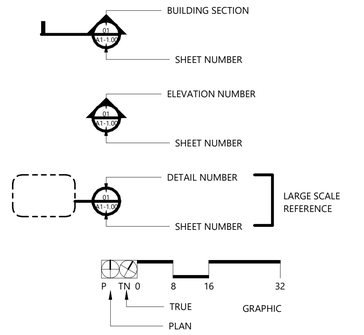

WALL LEGEND



WALL TYPE 1
TYPICAL NON LOAD BEARING 8" CMU WALL W/ VERTICAL REINFORCING. SEE STRUCTURE FOR DETAILS.

WALL TYPE 2
TYPICAL 5" UNIT DEMISING PARTITION GYP. ON BOTH SIDES - FIRE RATED

WALL TYPE 3
TYPICAL 4" INTERIOR PARTITION NON-RATED. GYP. ON BOTH SIDES

SEE TYPICAL WALL TYPES SHEET A7-1.01 FOR DETAILS

MATERIAL SYMBOLS

- EARTH
- GRANULAR FILL
- CONCRETE
- INSULATING CONCRETE
- CONCRETE MASONRY UNITS
- METAL LARGE SCALE
- ALUMINUM
- PLYWOOD LARGE SCALE
- FINISH WOOD
- CONTINUOUS
- BLOCKING
- GLASS LARGE SCALE
- CERAMIC
- METAL STUD
- WOOD STUD
- PLASTER, SAND, MORTAR, GROUT
- METAL LATH & PLASTER
- METAL
- RIGID INSULATION
- ACOUSTICAL TILE OR BOARD
- GYP. BD / PLASTER
- LIGHTWEIGHT CONCRETE
- CAST-IN-PLACE CONCRETE
- METAL (SMALL SCALE)
- CUT STONE
- ROUGH WOOD
- CERAMIC TILE
- ACOUSTICAL TILE
- SOUND INSULATION PARTITION
- GYPSUM WALL BOARD
- RESILIENT FLOORING
- INSULATION (LOOSE OR BATT)

CODES AND STANDARDS

LIFE SAFETY CODES
A.C.I.
A.I.S.C.
2023 FLORIDA FIRE PREVENTION CODE
2023 FLORIDA BUILDING CODE 6TH EDITION
2023 NATIONAL ELECTRIC CODE
2023 FBC MECHANICAL
2023 FBC PLUMBING
2023 FBC ACCESSIBILITY
FHA DESIGN MANUAL
MANUFACTURERS SPECS ARE NOT PART OF THIS CONTRACT.
PALM BEACH COUNTY PRODUCT APPROVAL REQUIREMENTS.
ALL CODES AS PER LATEST EDITIONS AND REVISIONS. SEE STRUCTURAL, MECHANICAL, AND ELECTRICAL PLANS FOR REFERENCED CODES.

GENERAL NOTES

1. THE ARCHITECT/ENGINEER SHALL NOT BE RESPONSIBLE FOR, NOR HAVE CONTROL OR CHARGE OF THE CONST. MEANS, METHODS, SEQUENCES OR PROCEDURES OR FOR SAFETY PRECAUTIONS AND PROGRAMS.
2. ALL WORK SHALL BE ACCORDING WITH THE CITY BUILDING CODE, LASTED EDITION, AND ALL OTHER LOCAL STATE AND FEDERAL CODES HAVING JURISDICTION.
3. CONTRACTOR SHALL FIELD VERIFY ALL DIMENSIONS AND FIELD CONDITIONS PRIOR TO COMMENCING WORK. ANY AND ALL DISCREPANCIES SHALL BE REPORTED TO THE ARCHITECT PRIOR TO THE COMMENCEMENT OF CONST.
4. CONTRACTOR SHALL SUPPLY AND INSTALL ALL HARDWARE REQUIRED FOR INSTALLATIONS AS INDICATED AND OR SPECIFIED IN DRAWINGS.
5. ALL WOOD IN CONTACT WITH MASONRY SHALL BE PRESSURE-TREATED. WOOD CASING, JAMBS AND TRIM SHALL BE STAIN GRADE OR CLEAR UNLESS SPECIFIED O/W.
6. CONTRACTOR SHALL SUBMIT SHOP DRAWINGS FOR ALL CUSTOM FABRICATED WORK. CONTRACTOR SHALL REVIEW/APPROVE ALL SUBMITTAL/SHOP DRAWING PRIOR TO SUBMITTING FOR ARCHITECT'S REVIEW.
7. DO NOT SCALE DRAWING. USE DIMENSION INDICATED IN DRAWINGS. DIMENSIONS FOR LARGE SCALE DRAWINGS AND DETAILS SHALL TAKE PRECEDENCE OVER SMALLER SCALE DRAWINGS. CONTRACTOR SHALL BE RESPONSIBLE FOR ALL DIMENSIONS AND VERIFY SAME IN FIELD.
8. IN THE EVENT THERE ARE FOUND DISCREPANCIES OR AMBIGUITIES IN OR OMISSION FROM THE SPECIFICATIONS OR DRAWINGS, OR SHOULD THERE BE DOUBT AS TO THEIR MEANING AND INTENT, THE ARCHITECT SHALL BE NOTIFIED IN ORDER TO PROVIDE CLARIFICATION IN THE 30 DAY FOLLOWING THE OWNER'S NOTICE TO PROCEED.
9. INSULATE MASONRY WALLS, EXTERIOR STUDS WALLS, AND ATTIC SPACE IN ACCORDANCE WITH THE ENERGY CODE CALCULATIONS.
10. ALL WINDOW AND DOOR SIZES ARE NOMINAL. VERIFY MANUFACTURER'S ACTUAL AND ROUGH OPENING DIMENSIONS.
11. ALL REQUIRED TEST SHALL BE PERFORMED BY OWNER. TESTING REQUIRED FOR PRODUCT APPROVAL TO BE PROVIDED BY GENERAL CONTRACTOR AND INCLUDED IN THEIR BID COST.
12. ALL DRYWALL, PLASTER AND STUCCO SHALL RECEIVE TWO COATS OF PREMIUM QUALITY PAINT. WOODS SHALL BE PAINTED OR STAINED. COLOR TO BE SELECTED BY OWNER.
13. IF DISCREPANCIES BETWEEN SPECIFICATIONS AND DRAWINGS, OR BETWEEN DRAWINGS ARE NOT CLARIFIED IN THE FIRST 30 DAYS, THE G.C. WILL PROVIDE THE MOST GENEROUS ITEM.
14. THE CONTR. SHALL OBTAIN FROM ALL SUB CONTRACTORS THE SIZE AND LOCATION OF ALL OPENINGS TO BE PROVIDED BY THEIR RESPECTIVE TRADE. THE CONTRACTORS SHALL BE RESPONSIBLE FOR COORDINATION, LOCATION, SIZE AND DETAIL.
15. THE CONTR. SHALL PROVIDE ALL SUPPLEMENTAL MATERIAL REQUIRED TO PROPERLY INSTALL, SUPPORT AND BRACE ALL ITEMS AND COMPONENTS WITHIN WORK.
16. THE GENERAL CONTRACTOR GUARANTEES AND WARRANTS THAT ALL WORK PERFORMED SHALL BE FREE FROM DEFECTS IN MATERIAL AND WORKMANSHIP FOR A PERIOD OF ONE YEAR AFTER THE ISSUANCE OF THE CERTIFICATE OF FINAL COMPLETION ANY DEFECTS OR DAMAGE DISCOVERED DURING SAID PERIOD SHALL BE REPAIRED OR REPLACED. AS DIRECTED IN WRITING BY THE ARCHITECT, AT NO ADDITIONAL COST.
17. ALL INTERIOR FINISHES SHALL BE IN ACCORDANCE WITH CHAPTER VII OF THE F.B.C.
18. FIXED GLASS, GLASS DOOR PANEL AND/OR OPERABLE WINDOW WITHIN 42" OF THE FINISH FLOOR SHALL BE SAFETY GLASS.
19. CONTRACTOR TO PROVIDE SHORING (RESHORING) DRAWINGS & CALC. FOR REVIEW & APPROVAL FROM THE MUNICIPALITY.
20. GENERAL CONTRACTOR TO PROVIDE DOCUMENTS FOR ALL EXTERIOR DOOR ASSEMBLIES, STOREFRONTS, LOUVERS, GRILLES /EGG CRATES AND WINDOWS FOR APPROVAL BY THE MUNICIPALITY. (ALL OF THE ABOVE WERE NOT INCLUDED IN THIS PERMIT)
21. COMPLETION: CONTRACTOR TO NOTIFY OWNER AND/OR ARCHITECT IN WRITING AT LEAST ONE WEEK PRIOR TO FINAL INSPECTION. FINAL DISBURSEMENT TO CONTRACTOR SHALL NOT BE MADE UNTIL OWNERS PUNCH LIST HAS BEEN SATISFIED. CONTRACTOR TO PROVIDE OWNER WITH WRITTEN GUARANTEE ON ALL EQUIPMENT. CONTRACTOR AT COMPLETION OF WORK SHALL REMOVE FROM THE PREMISES ALL RUBBISH, IMPLEMENTS, EQUIPMENT, AND SURPLUS MATERIALS, LEAVE THE PROJECT "BROOM CLEAN".

SECURITY REQUIREMENTS

1. WOOD FLUSH-TYPE DOORS SHALL BE 1-3/8" THICK MIN. W/ SOLID WOOD CORE CONST.
2. DOORS STOPS OF IN-SWINGING DOORS SHALL BE OF ONE- PIECE CONSTRUCTION WITH THE JAMB OR JOINED BY RABBET TO THE JAMB.
3. ALL PIN-TYPE DOOR HINGES ACCESSIBLE FROM OUTSIDE SHALL HAVE NON-REMOVABLE HINGE PINS. HINGES SHALL HAVE MIN. 1/4" DIA. STEEL JAMB STUD WITH 1/4" MIN. PROTECTION. THE STRIKE PLATE FOR LATCHES AND HOLDING DEVICE FOR PROJECTING DEAD BOLTS IN WOOD CONSTRUCTION SHALL BE SECURED TO THE JAMB AND THE WALL FRAMING WITH SCREWS NO LESS THAN 2-1/2" LONG.
4. PROVIDE DEAD BOLTS WITH HARDENED INSERTS; DEADLOCKING LATCH WITH KEY-OPERATED LOCKS ON EXTERIOR. LOCKS MUST BE OPERABLE FROM INSIDE WITHOUT KEY, SPECIAL KNOWLEDGE OR SPECIAL EFFORT.
5. STRAIGHT DEAD BOLTS SHALL HAVE MIN. THROW OF 1" AND AN EMBEDMENT OF NOT LESS THAN 5/8", AND A HOOK-SHAPED OR AN EXPANDING-LUG DEADBOLT SHALL HAVE A MINIMUM THROW OF 3/4".

SHOP DRAWINGS AND SUBMITTALS

DOORS- FRAMES, DOOR TYPES, SPECIFICATIONS AND INSTALLATIONS. HARDWARE SCHEDULE. WINDOWS AND GLAZING - DETAILS AND SAMPLES. DRYWALL - MATERIALS AND INSTALLATION (MATERIALS AND FIXTURES). MECHANICAL A/C, HEATING AND VENTILATION MATERIALS AND INSTALLATION. SPRINKLER - METAL GUTTERS AND DRAIN SPOUTS. ALARMS - ELECTRICAL MATERIALS AND FIXTURES. AUDIO - ELEVATIONS - MATERIALS AND INSTALLATIONS. KITCHEN EQUIPMENT. CABINETS - AS CALLED ON INTERIOR DESIGN DRAWINGS. FINISHES - AS CALLED ON DRAWINGS. SUBMIT 6 SET MINIMUM (FOR ARCHITECT APPROVAL) ALLOW SUFFICIENT TIME FOR PROCESSING (TWO WEEKS) SHOP DRAWINGS SHALL BE REVIEWED BY CONTRACTOR AND ARCHITECT. SHOP DRAWINGS SUBMITTAL REJECTED SHALL BE RESUBMITTED SHOWING CORRECTIONS. SUBMIT SAMPLES AND COLOR CHART FOR FINISHES. SUBMIT ROOFING BOND "10 YEARS" (MATERIALS AND INSTALLATION). ELEVATOR GUARANTEES CONCRETE TEST AND DESIGN MIX MORTAR MIX AND DESIGN. ALL SUBCONTRACTORS SHALL GUARANTEE THEIR WORK (MAT. AND LABOR). FOR A MINIMUM PERIOD OF ONE YEAR UNLESS OTHERWISE NOTED OR REQ.

SITE PLAN, FOUNDATION & GRADING

1. CONTRACTOR SHALL FIELD VERIFY, PRIOR TO CONSTRUCTION, THAT ALL SETBACKS ARE MET PER SITE PLAN AND THAT RESIDENCE AND ITS AMENITIES SIT ON SITE EXACTLY AS PER THIS SITE PLAN.
2. EXCAVATION SHALL BE MADE IN COMPLIANCE WITH OSHA REGULATIONS.
3. ALL FOUNDATION EXCAVATIONS MUST BE OBSERVED AND APPROVED, IN WRITING BY THE PROJECT GEO TECHNICAL PRIOR TO PLACEMENT OF REINFORCING STEEL.
4. IF ADVERSE SOIL CONDITION ARE ENCOUNTERED, CONTACT GEOTECHNICAL CONSULTANT.
5. CONCRETE SLABS ON GRADE ON EXPANSIVE SOIL OR COMPACTED FILL SHALL BE PLACED ON A 4 INCH FILL OF COARSE AGGREGATE OR ON A 2" SHALL BE PLACED ON A 4 INCH FILL OF COARSE AGGREGATE OR ON A 2" SAND BED COVERED MOISTURE BARRIER MEMBRANE. THE SLABS SHALL BE AT LEAST 3 1/2" INCHES THICK AND SHALL BE REINFORCED WITH #4 BARS SPACED AT INTERVALS NOT EXCEEDING 16 INCHES EACH WAY.
6. ALL CONCRETE SLABS ON GRADE OF ENCLOSED AIR CONDITIONED SPACES ARE TO HAVE A 6 MIL POLYETHYLENE OR APPROVED VAPOR RETARDER WITH JOINTS LAPPED NOT LESS THAN 6" PLACED BETWEEN THE SLAB AND THE BASE COURSE OR PREPARED SUBGRADE.
7. TERMITE PROTECTION NOTES:
   TERMITE PROTECTION SHALL BE PROVIDE BY FLORIDA REGISTERED TERMICIDES OR OTHER APPROVED METHODS OF TERMITE PROTECTION LABELED FOR USE AS PREVENTATIVE TREATMENT TO NEW CONSTRUCTION.

   SOIL SHALL BE TERMITE TREATED PRIOR TO CONSTRUCTION.
   CONTRACTOR SHALL POST A WEATHER RESISTANT JOB BOARD TO RECEIVE DUPLICATE TREATMENT CERTIFICATES AND SHALL DISPLAY PRODUCT USED IDENTITY OF APPLICATOR, TIME AND DATE OF TREATMENT, SITE LOCATION, AREA TREATED, CHEMICAL USED, PERCENT CONCENTRATION AND NUMBER OF GALLONS USED.

DRAINAGE NOTES

1. ALL DRAINAGE SHALL BE MAINTAINED ON PROPERTY AND SHALL NOT DRAIN ONTO NEIGHBORING PROPERTIES.
2. INSTALL ROOF DRAINS, GUTTERS AND DOWNSPOUT ACCORDING TO PLANS.
3. ALL DRAINAGE SHALL BE CONDUCTED TO STREET IN NON-EROSIVE DEVICES 2% min.
4. BUILT-IN 4" DOWNSPOUT. PROVIDE SOUND INSULATION FOR ALL BUILT IN PIPING.
5. BASEMENT WATER SHALL BE DISCHARGED TO LAWN.

GLAZING NOTES

1. GLAZING IN HAZARDOUS LOCATIONS SHALL BE TEMPERED INGRESS AND EGRESS DOORS; PANELS IN SLIDING OR SWINGING DOORS; DOORS AND ENCLOSURE FOR HOT TUB BATHTUB AND SHOWERS. GLAZING IN WALL ENCLOSING THESE COMPARTMENTS WITHIN 5' OF STANDING SURFACE; IN WALL ENCLOSING STAIRWAY LANDING. EACH LIGHT OF SAFETY GLAZING (PANE) MATERIAL INSTALLED IN HAZARDOUS LOCATIONS SHALL BE IDENTIFIED BY A PERMANENT LABEL THAT SPECIFIES THE LABELER, AND STATES THAT SAFETY GLAZING MATERIAL HAS BEEN UTILIZED IN SUCH INS