


ARCHITECT: RUBEN JUAN PUJOL
 P.O. BOX 908 2155
 MIAMI, FL 33161
 TEL: 305-555-7258
 FAX: 305-555-7258

PROPOSED NEW SINGLE RESIDENCE
 912 NE 2ND ST
 MIAMI, FL 33132
 PROPERTY ADDRESS

SP-1




SECTION: DRIVEWAY APPROACH AT SIDEWALK
 ALL SIDEWALK AT DRIVEWAY MUST HAVE A MIN 4" CONCRETE THICKNESS

BURGLARY INTRUSION NOTES

1. ALL EXTERIOR DOORS, WINDOWS, GLASS AND GLAZING SHALL COMPLY AND BE PROVIDED WITH INTRUSION AND BURGLARY RESISTANCE IN ACCORDANCE WITH ARTICLE V OF CHAPTER 38 AS OUTLINED IN THE CODE OF METROPOLITAN Dade County, Florida.
2. ALL LOCKS ON EXTERIOR DOORS SHALL BE CAPABLE OF RESISTING A FORCE OF 100 LBS. IN ANY DIRECTION AND IN ACCORDANCE WITH THE AMERICAN NATIONAL STANDARDS INSTITUTE'S STANDARD Z89.1.
3. ALL SINGLE EXTERIOR SWING DOORS SHALL HAVE A LOCK TO BE KEY OPERATED AND A MINIMUM OF 600 POSSIBLE KEY CHANGES ON LOCKING MECHANISM. THE LOCK SHALL BE INSTALLED AND CONSTRUCTED IN ACCORDANCE WITH THE AMERICAN NATIONAL STANDARDS INSTITUTE'S STANDARD Z89.1.
4. THE ACTIVE LEAF OF PAIRS OF EXTERIOR SWING DOORS SHALL HAVE SAUF (SAFETY UNDER FINGER) LOCKS WITH 3/8" MINIMUM THROU BOLT WITH INSERTS.
5. A BOLT WITH INSERTS SHALL BE PROVIDED WITH SLIDING DOOR DEAD BOLTS OR OR PM NOT REMOVABLE OR OPERABLE FROM EXTERIOR AT THE JAMB, HEAD, SILL AND LOCK AREA TO MAINTAIN RESISTANCE TO BURGLARY INTRUSION. THESE DOORS SHALL BE REINFORCED IN THE INTERIOR AND EXTERIOR WITH 3/8" X 12" X 12" STEEL BOLTS WITH 3/8" X 12" X 12" STEEL NUTS AND WASHERS. THE BOLTS SHALL HAVE NO SCREWS REMOVABLE FROM EXTERIOR.
6. INTERIOR DOORS ON EXTERIOR OUT SWING DOORS SHALL HAVE NON-REMOVABLE PIN, PIN AND WEDGE LOCKS.
7. JAMBS OF ALL EXTERIOR OFFSET TYPE IN-SWING DOORS BE REINFORCED, OR OF OTHER TYPE, TO PREVENT DEFEATING THE PURPOSE OF THE SHIRK AND THE INTERIOR LOCKING MECHANISM.
8. SINGLE SWINGING EXTERIOR DOORS IF WOOD SHALL BE SOLID CORE OF NOT LESS THAN 1 1/2" THICK.
9. GLASS AND EXTERIOR DOORS SHALL COMPLY WITH THE AMERICAN NATIONAL STANDARDS INSTITUTE'S STANDARD Z89.1.
10. VISION PANELS IN EXTERIOR DOORS OTHER THAN GLAZING WITHIN 40" OF THE DOOR SHALL BE REINFORCED WITH 3/8" X 12" X 12" STEEL BOLTS WITH 3/8" X 12" X 12" STEEL NUTS AND WASHERS. THE BOLTS SHALL HAVE NO SCREWS REMOVABLE FROM EXTERIOR.
11. SLIDING GLASS DOORS AND WINDOWS SHALL BE INSTALLED AND CONSTRUCTED IN ACCORDANCE WITH THE AMERICAN NATIONAL STANDARDS INSTITUTE'S STANDARD Z89.1. THE DOORS SHALL BE INSTALLED AND CONSTRUCTED IN ACCORDANCE WITH THE AMERICAN NATIONAL STANDARDS INSTITUTE'S STANDARD Z89.1. THE DOORS SHALL BE INSTALLED AND CONSTRUCTED IN ACCORDANCE WITH THE AMERICAN NATIONAL STANDARDS INSTITUTE'S STANDARD Z89.1.
12. FRONT AND REAR ENTRANCE DOORS SHALL BE PROVIDED WITH A DOOR SCOPE OR VISION PANELS.
13. GRILLS AND/OR GRILLE TYPE DOORS SHALL BE PROVIDED WITH LOCKS AND KEYS. THE LOCKS SHALL BE INSTALLED AND CONSTRUCTED IN ACCORDANCE WITH THE AMERICAN NATIONAL STANDARDS INSTITUTE'S STANDARD Z89.1. THE DOORS SHALL BE INSTALLED AND CONSTRUCTED IN ACCORDANCE WITH THE AMERICAN NATIONAL STANDARDS INSTITUTE'S STANDARD Z89.1.
14. THE ACTIVE LEAF OF PAIRS OF SWINGING DOORS SHALL HAVE LOCKS AS DESCRIBED IN NOTE 3. THE LOCKS SHALL BE INSTALLED AND CONSTRUCTED IN ACCORDANCE WITH THE AMERICAN NATIONAL STANDARDS INSTITUTE'S STANDARD Z89.1. THE DOORS SHALL BE INSTALLED AND CONSTRUCTED IN ACCORDANCE WITH THE AMERICAN NATIONAL STANDARDS INSTITUTE'S STANDARD Z89.1.

SHOP DRAWING NOTE:
 ALL SHOP DRAWING REQUIRED APPROVAL

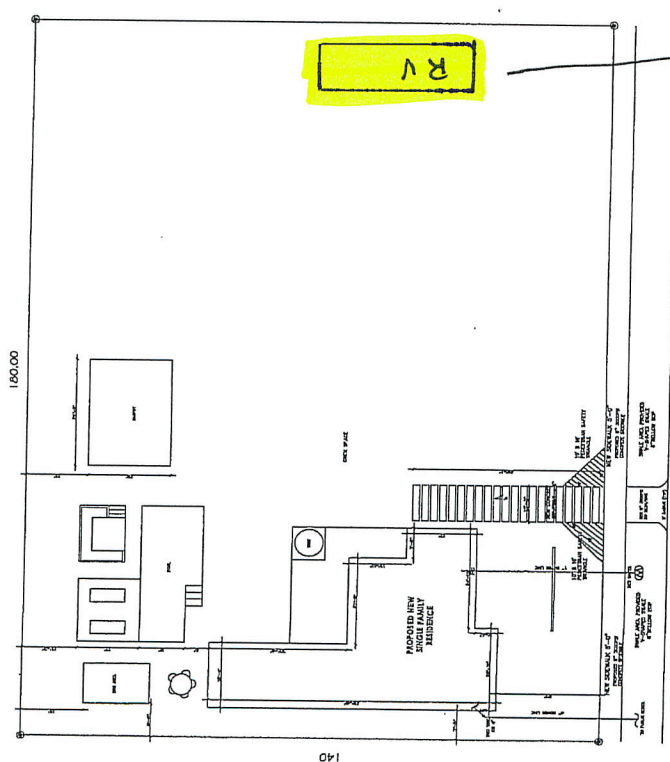

NE 2ND STREET
 (50' R/W)
 ASPHALT

Proposed Location of Temporary WSE RV