

SURVEY NOTES:

- THE LAND DESCRIPTION SHOWN HEREON WAS PROVIDED BY THE CLIENT.
- NOT VALID WITHOUT THE SIGNATURE AND ORIGINAL RAISED SEAL OR AN ENCRYPTED DIGITAL SIGNATURE OF A FLORIDA PROFESSIONAL SURVEYOR AND MAPPER.
- IT IS A VIOLATION OF THE STANDARDS OF PRACTICE RULE 5J-17 OF THE FLORIDA ADMINISTRATIVE CODE TO ALTER THIS SURVEY WITHOUT THE EXPRESS PRIOR WRITTEN CONSENT OF THE SURVEYOR. ADDITIONS AND/OR DELETIONS MADE TO THE FACE OF THIS SURVEY WILL MAKE THIS SURVEY INVALID.
- LANDS SHOWN HEREON WERE NOT ABSTRACTED FOR RIGHTS OF WAY, EASEMENTS, OWNERSHIP, OR OTHER INSTRUMENTS OF RECORD.
- BEARINGS SHOWN HEREON ARE BASED ON AN ASSUMED MERIDIAN ALONG THE NORTH LINE OF LOT 20, EAST COAST FINANCE CORPORATION'S SUBDIVISION OF GOVERNMENT LOT 3, ACCORDING THE PLAT THEREOF AS RECORDED IN PLAT BOOK 1, PAGE 25, OF THE PUBLIC RECORDS OF BROWARD COUNTY, FLORIDA. BEING NORTH 88°52'15" EAST.
- THE OWNERSHIP OF FENCES, PERIMETER WALLS AND/OR HEDGES SHOWN HEREON ARE NOT KNOWN AND THUS ARE NOT LISTED AS ENCROACHMENTS. FENCES, HEDGES AND/OR PERIMETER WALLS ARE SHOWN IN THEIR RELATIVE POSITION TO THE BOUNDARY.
- ELEVATIONS SHOWN HEREON ARE BASED ON THE NORTH AMERICAN VERTICAL DATUM OF 1988 (NAVD88). SAID ELEVATIONS ARE BASED ON COAST & GEODETIC SURVEY BENCH MARK DISK "W 311, PID AD2603", 1.7 MI N FROM POMPANO BEACH, ABOUT 1.7 MILES NORTH ALONG STATE HIGHWAY A1A FROM THE JUNCTION OF STATE HIGHWAY 814 AT POMPANO BEACH. SET ON THE TOP OF THE SOUTHWEST CORNER OF A CATCH BASIN, ABOUT 0.35 MILE NORTH OF THE JUNCTION OF STATE HIGHWAY 844, NEAR THE JUNCTION OF BARTON ROAD, 22.5 FEET WEST OF THE CENTER LINE OF THE HIGHWAY, 29 FEET SOUTH OF THE APPROXIMATE CENTER LINE OF BARTON ROAD AND ABOUT LEVEL WITH THE HIGHWAY, ELEVATION = 1.77 FEET (NAVD88); AND TIDAL STATION DISK "872 2859 3, PID AD5848", IN POMPANO BEACH AT THE STATE HIGHWAY A1A BRIDGE OVER HILLSBORO INLET IN POMPANO BEACH. THE MARK IS SET IN THE CONCRETE CURBING NEAR A DRAIN AND BEARS 222 FEET SOUTH OF THE SOUTH END OF THE BRIDGE, 18 FEET WEST OF A1A CENTERLINE, AND RECOVERED AS DESCRIBED IN NOS TIDAL DATA, QUAD 260802. THE MARK IS ABOVE LEVEL WITH CURBING, ELEVATION = 2.03 FEET (NAVD88).
- FEATURES AND LINE WORK SHOWN HEREON ARE REFERENCED TO THE NORTH AMERICAN HORIZONTAL DATUM OF 1983 WITH THE 2011 ADJUSTMENT APPLIED (83/NSRS11), TRANSVERSE MERCATOR, FLORIDA EAST ZONE.
- THE EXPECTED VERTICAL ACCURACY OF THE INFORMATION SHOWN HEREON IS ±0.03' FOR HARD SURFACE ELEVATIONS AND 0.1' FOR SOFT SURFACE ELEVATIONS.
- THE HORIZONTAL FEATURES SHOWN HEREON ARE PLOTTED TO WITHIN 1/20 OF THE MAP SCALE. HORIZONTAL FEATURE LOCATION IS TO THE CENTER OF THE SYMBOL AND MAY BE ALTERED FOR CLARITY. DISTANCES AND ELEVATIONS SHOWN HEREON ARE U.S. SURVEY FEET UNLESS OTHERWISE NOTED. THE EXPECTED HORIZONTAL ACCURACY OF THE INFORMATION SHOWN HEREON IS ±0.1'.
- THE INTENDED DISPLAY SCALE FOR THIS SURVEY IS 1"=20' OR SMALLER.

LEGEND:

- |           |                                      |                          |
|-----------|--------------------------------------|--------------------------|
| B.C.R.    | BROWARD COUNTY RECORDS               | GUY ANCHOR               |
| BFP       | BACK FLOW PREVENTER                  | HANDICAP PARKING         |
| BLDG.     | BUILDING                             | IRRIGATION CONTROL VALVE |
| BM        | BENCHMARK                            | IRRIGATION WELL          |
| CB        | CATCH BASIN                          | FLOOD LIGHT              |
| C.B.A.    | CONCRETE BLOCK STRUCTURE             | GRILL                    |
| CMP       | CORRUGATED METAL PIPE                | METAL LIGHT POLE         |
| CO        | CLEAN OUT                            | PALM TREE                |
| CONC.     | CONCRETE                             | SHADE TREE               |
| D.B.      | DEED BOOK                            | SINGLE POST SIGN         |
| DDCV      | DOUBLE DETECTOR CHECK VALVE          | SPRINKLER HEAD           |
| DIP       | DUCTILE IRON PIPE                    | SANITARY SEWER CLEANOUT  |
| EH        | ELECTRIC HAND HOLE                   | SANITARY SEWER MANHOLE   |
| ELEV.     | ELEVATION                            | TRASH CAN                |
| F.D.O.T.  | FLORIDA DEPARTMENT OF TRANSPORTATION | WATER FOUNTAIN           |
| F.F.      | FINISH FLOOR                         | WATER METER              |
| FPL       | FLORIDA POWER & LIGHT COMPANY        | WATER VALVE              |
| GIS       | GEOGRAPHIC INFORMATION SYSTEMS       | WOOD LIGHT POLE          |
| ICV       | IRRIGATION CONTROL VALVE             | ELECTRIC MANHOLE         |
| INV.      | INVERT                               | ELECTRIC OUTLET          |
| LE        | FLORIDA LICENSED BUSINESS NUMBER     | FIRE HYDRANT             |
| MB        | MONITORING WELL                      | CHAIN LINK FENCE         |
| O.R.B.    | OFFICIAL RECORDS BOOK                | WOOD FENCE               |
| RCP       | REINFORCED CONCRETE PIPE             | METAL FENCE              |
| R/W       | RIGHT OF WAY                         | OVERHEAD LINES           |
| P.B.      | PLAT BOOK                            |                          |
| PG.       | PAGE                                 |                          |
| PVC       | POLYVINYL CHLORIDE PIPE              |                          |
| SCH       | SCHEDULE                             |                          |
| STY.      | STORY                                |                          |
| SPK       | SPRINKLER                            |                          |
| TYP.      | TYPICAL                              |                          |
| RFP (N/A) | BACK FLOW PREVENTER                  |                          |
| ●         | BENCH                                |                          |
| ●         | BENCHMARK                            |                          |
| ●         | BOLLARD                              |                          |
| ●         | CATCH BASIN                          |                          |
| ●         | CONCRETE COLUMN                      |                          |
| ●         | DOUBLE DETECTOR CHECK VALVE          |                          |
| ●         | DOUBLE POST SIGN                     |                          |
| ●         | ELECTRIC HAND HOLE                   |                          |

LEGAL DESCRIPTION:

LOT 20, EAST COAST FINANCE CORPORATION'S SUBDIVISION OF GOVERNMENT LOT 3, ACCORDING TO THE PLAT THEREOF AS RECORDED IN PLAT BOOK 1, PAGE 25 OF THE PUBLIC RECORDS OF BROWARD COUNTY, FLORIDA.

LESS THE WEST 300' THEREOF.

ALL OF THE DESCRIBED LAND HEREON LYING IN THE CITY OF POMPANO BEACH, BROWARD COUNTY FLORIDA.


CERTIFICATION:

I HEREBY CERTIFY THAT THE ATTACHED TOPOGRAPHIC SURVEY OF THE HEREON DESCRIBED PROPERTY IS DEPICTED TO THE BEST OF MY KNOWLEDGE AND BELIEF AND THE INFORMATION AS SURVEYED UNDER MY DIRECTION ON JUNE 24, 2019 MEETS THE STANDARDS OF PRACTICE RULE 5J-17 OF THE FLORIDA ADMINISTRATIVE CODE, PURSUANT TO SECTION 472.027, FLORIDA STATUTES, SUBJECT TO THE QUALIFICATIONS NOTED HEREON.

KEITH & ASSOCIATES, INC.  
CONSULTING ENGINEERS


TIMOTHY H. GRAY  
PROFESSIONAL SURVEYOR AND MAPPER  
REGISTRATION No. 6604  
STATE OF FLORIDA

Digitally signed  
by Timothy H. Gray  
Date: 2022.03.03  
14:23:56-0500



TOPOGRAPHIC SURVEY  
NORTH OCEAN PARK

A PORTION OF LOT 20  
EAST COAST FINANCE CORPORATION'S SUBDIVISION OF GOVERNMENT LOT 3  
PLAT BOOK 1, PAGE 25, B.C.R.  
CITY OF POMPANO BEACH  
FLORIDA

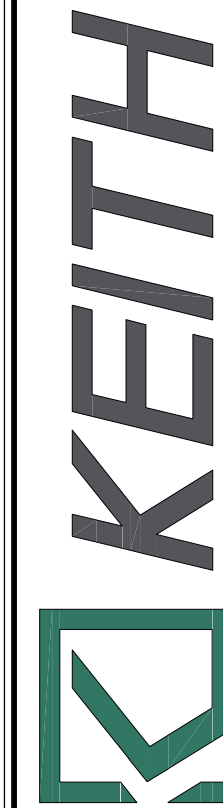

301 EAST ATLANTIC BOULEVARD  
POMPANO BEACH, FLORIDA 33060-6643  
(954) 788-3400 FAX (954) 788-3500  
EMAIL: mail@KEITHteam.com LB NO. 6860

DATE	SCALE	FIELD BOOK	DRAWN BY	CHECKED BY
6/24/19	1"= 20'	893	DOB	LP

DATE	REVISION	BY