


MK	DATE	DESCRIPTION

SHEET TITLE:

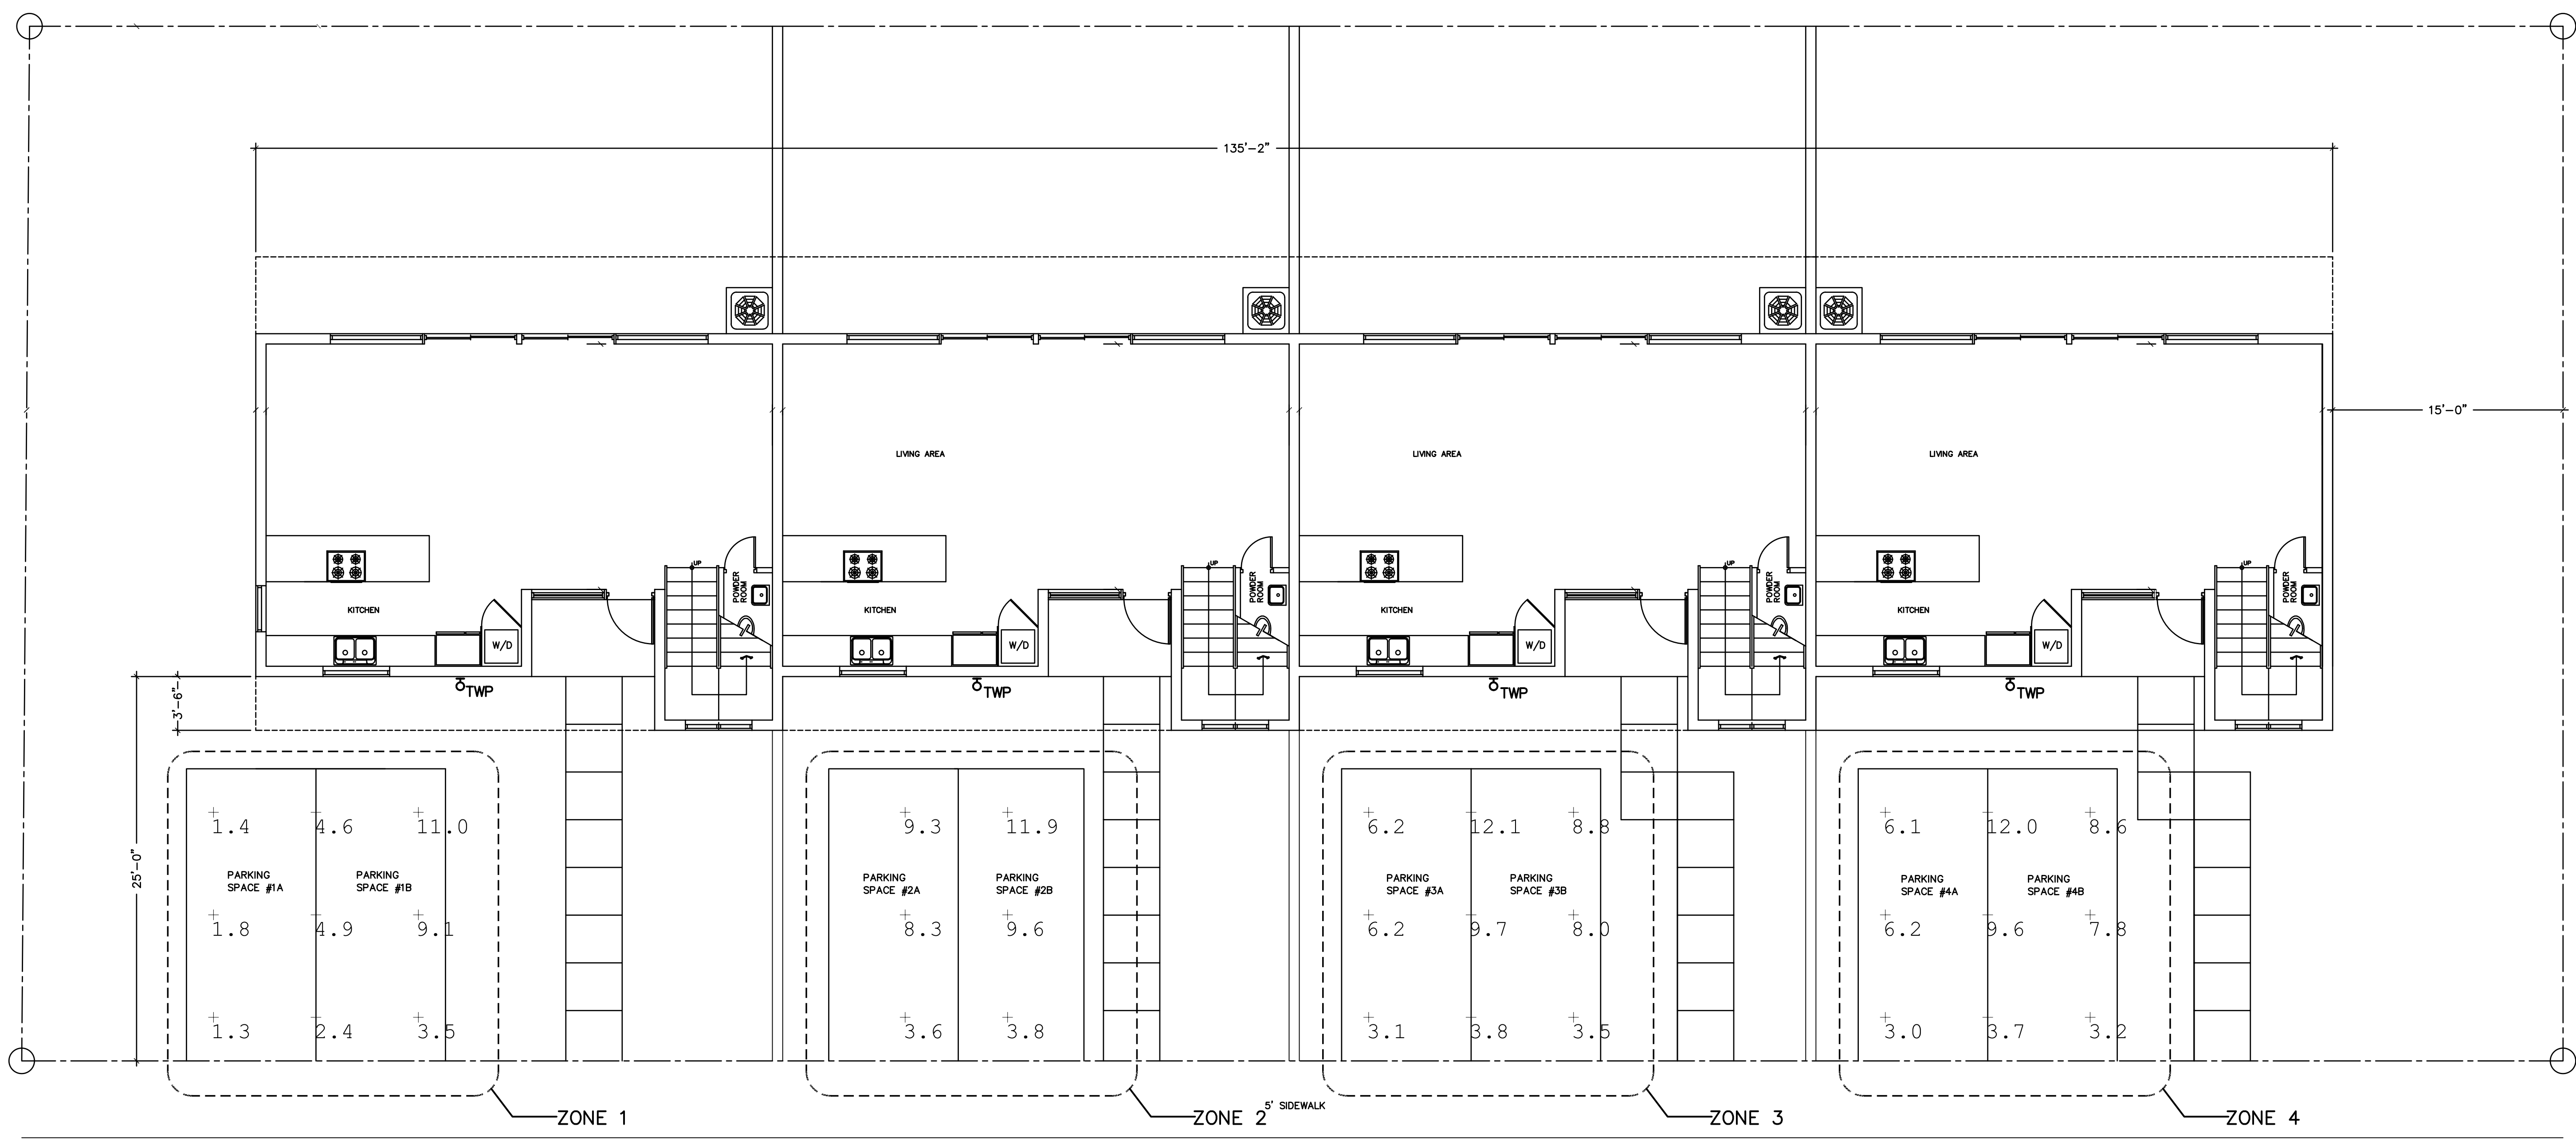

Photometric Plan
SCALE: 3/16"=1'-0"

- GENERAL NOTES:
- 1.- IN EACH APARTMENT UNIT THE OUTDOOR LUMINAIRE SHALL BE CONNECTED TO THE PANELBOARD OF THAT UNIT. THIS LOAD IS CONSIDERED A GENERAL LIGHTING LOAD PART OF THE 3 W/S.F.
 - 2.- EACH LUMINAIRE COMES WITH FACTORY BUILT-IN PHOTOCCELL.
 - 3.- LUMINAIRES SHALL BE INSTALLED AT 7'-0 AFF. RFEER TOARCHITECTURAL DRAWINGS.
 - 4.- LUMINAIRES SHALL BE LISTED FOR WET LOCATION.
 - 5.- NO CHANGE OF THE LUMINAIRE MANUFACTURER, TYPE AND MODEL SHALL BE PERMITTED.

LUMINAIRE SCHEDULE

MARK	DESCRIPTION	MANUFACTURER	MODEL	LAMP	WATTS	VOLT	LUMINANCE	COLOR TEMP	EFFICIENCY	MOUNTING	NOTES
TWP	LED POLYCARBONATE WALL PACK	LITHONIA	TPWX2 LED P2 30K MVOLT PE	LED	32	UNIV	4,050	3000K	126.57 L/W	WALL MOUNTED	(1)(2)

ALL LUMINAIRE MUST BE LISTED BY A NATIONAL RECOGNIZED TESTING LABORATORY.
(1) PROVIDE SUPPORT AS PER NEC
(2) UL LISTED FOR WET LOCATIONS



PHOTOMETRIC ANALYSIS STATISTICS

AREA	ILLUMINANCE (FOOTCANDLE)			STATISTICS				POINTS	
	AVERAGE	MAXIMUM	MINIMUM	AVG/MIN	MAX/MIN	MAX/AVG	POINTS	IN RANGE	
ZONE 1	4.44	11	1.3	3.42	8.46	2.48	9	100	
ZONE 2	7.75	11.9	3.6	2.15	3.31	1.54	9	100	
ZONE 3	6.82	12.1	3.1	2.20	3.90	1.77	9	100	
ZONE 4	6.69	12	3	2.23	4.00	1.79	9	100	