

TREE DISPOSITION SUMMARY:


TOTAL TREES REMOVED	8
TOTAL TREES RELOCATED	2
TOTAL PALMS REMOVED	13
TOTAL PALMS RELOCATED	0
DOLLAR VALUE REMOVED (TREES & PALMS)	
DBH (INCHES) TO BE REMOVED	\$9,047.12
DBH (INCHES) PROVIDED	27
TOTAL DBH (INCHES) DEFICIENCY:	47
TOTAL PROPOSED CANOPY TRUST FUND CONTRIBUTION:(TREES # 1,2,3,26 = 47.5")	\$4,722

*NO SPECIMEN TREES ARE BEING REMOVED WITHIN PROJECT LIMITS

KEY:

	TREE TO REMAIN
	TREE TO BE REMOVED
	TREE TO BE RELOCATED
	TREE TO BE PROTECTED PER DETAIL ON THIS SHEET



Tree #	Common name	Botanical name	DBH	Height	Condition	Price per in / ft	Sq. inches	Dispoition	Value before Diminution	Value
*** 1	Gumbo limbo	Bursera simaruba	13	20	60%	\$156.25	NA	REMOVE	2,031.25	\$1,218.75
*** 2	Black olive	Bucida buceras	17	50	60%	\$179.16	NA	REMOVE	3,045.72	\$1,827.43
*** 3	Gumbo limbo	Bursera simaruba	8	15	40%	\$156.25	NA	REMOVE	1,250.00	\$500.00
4	Sabal palm	Sabal palmetto	NA	8	70%	\$233.33	NA	REMOVE	233.33	\$163.33
5	Not used					\$0.00			0.00	\$0.00
6	Sabal palm	Sabal palmetto	NA	25	60%	\$233.33	NA	REMOVE	233.33	\$140.00
7	Gumbo limbo	Bursera simaruba	6.5	14	40%	\$156.25	NA	REMAIN	1,015.63	\$406.25
7A	Pink tabebuia	Tabebuia rosea	7.5	14	30%	\$166.66	NA	REMAIN	1,249.95	\$374.99
8	Sabal palm	Sabal palmetto	NA	8	80%	\$233.33	NA	REMOVE	233.33	\$186.66
9	Live oak	Quercus virginiana	8.5	30	30%	\$177.08	NA	REMOVE	1,505.18	\$451.55
10	Gumbo limbo	Bursera simaruba	8.5	15	20%	\$156.25	NA	REMOVE	1,328.13	\$265.63
11	Sabal palm	Sabal palmetto	NA	20	60%	\$233.33	NA	REMOVE	233.33	\$140.00
12	Sabal palm	Sabal palmetto	NA	15	60%	\$233.33	NA	REMOVE	233.33	\$140.00
13	Sabal palm	Sabal palmetto	NA	10	70%	\$233.33	NA	REMOVE	233.33	\$163.33
14	Sabal palm	Sabal palmetto	NA	20	70%	\$233.33	NA	REMOVE	233.33	\$163.33
15	Sabal palm	Sabal palmetto	NA	20	70%	\$233.33	NA	REMOVE	233.33	\$163.33
16	Missing	(REMOVED FROM PLANS)				\$0.00	NA		0.00	\$0.00
17	Missing	(REMOVED FROM PLANS)				\$0.00	NA		0.00	\$0.00
18	Sabal palm	Sabal palmetto	NA	20	70%	\$233.33	NA	REMOVE	233.33	\$163.33
19	Strangler fig	Ficus aurea	47	30	60%	\$210.16	1256.64	REMAIN	\$264,095.46	\$158,457.28
20	Sabal palm	Sabal palmetto	NA	28	40%	\$233.33	NA	REMOVE	233.33	\$93.33
21	Alexander palm	Pychosperma elegan.	NA	9	70%	\$30.00	NA	REMOVE	270.00	\$189.00
22	Areca palm	Dypsis lutescens	NA	20	50%	\$62.50	NA	REMOVE	362.50	362.50
23	Areca palm	Dypsis lutescens	NA	8	50%	\$62.50	NA	REMOVE	362.50	362.50
24	Missing	(REMOVED FROM PLANS)				\$0.00			0.00	\$0.00
25	Sabal palm	Sabal palmetto	NA	20	70%	\$233.33	NA	REMAIN	233.33	\$163.33
***26	Live oak	Quercus virginiana	9.5	30	70%	\$177.08	NA	RELOCATE	1,682.26	\$1,177.58
27	Sabal palm	Sabal palmetto	NA	20	70%	\$233.33	NA	REMAIN	233.33	\$163.33
28	Live oak	Quercus virginiana	11	30	60%	\$177.08	NA	REMAIN	1,947.88	\$1,168.73
29	Sabal palm	Sabal palmetto	NA	20	70%	\$233.33	NA	REMAIN	233.33	\$163.33
30	Green buttonwood	Conocarpus erectus	6.5	25	50%	\$362.50	NA	REMOVE	2,356.25	\$1,178.13
31	Live oak	Quercus virginiana	14	40	80%	\$177.08	NA	REMAIN	2,479.12	\$1,983.30
32	Green buttonwood	Conocarpus erectus	8.5	25	60%	\$362.50	NA	REMAIN	3,081.25	\$1,848.75
33	Cypress	Taxodium distichum	21.5	50	70%	\$91.25	NA	REMAIN	1,961.88	\$1,373.31
34	Pink tabebuia	Tabebuia rosea	4.5	20	40%	\$166.66	NA	REMOVE	749.97	\$299.99
35	Mahogany	Swietenia mahagoni	8	35	70%	\$156.25	NA	REMOVE	1,250.00	\$875.00
36	Sabal palm	Sabal palmetto	NA	20	70%	\$233.33	NA	REMAIN	233.33	\$163.33
37	Crepe myrtle	Lagerstroemia	4.5	20	70%	\$118.75	NA	REMAIN	534.38	\$374.06
38	Live oak	Quercus virginiana	14	40	70%	\$177.08	NA	RELOCATE	2,479.12	\$1,735.38
39	Alexander palm	Pychosperma elegan.	NA	25	60%	\$30.00	NA	REMAIN	750.00	\$450.00
40	Coconut Palm	Cocos nucifera	NA	15	70%	\$154.17	NA	REMAIN	2,312.55	\$1,618.79
41	Coconut Palm	Cocos nucifera	NA	17	70%	\$154.17	NA	REMAIN	2,620.89	\$1,834.62
42	Alexander palm	Pychosperma elegan.	NA	15	60%	\$30.00	NA	REMAIN	450.00	\$270.00
43	Coconut Palm	Cocos nucifera	NA	14	70%	\$154.17	NA	REMAIN	2,158.38	\$1,510.87
44	Ficus microcarpa	Ficus microcarpa	NA			\$0.00	NA	REMAIN	0.00	\$0.00
45	Areca palm	Dypsis lutescens	NA	8	50%	\$62.50	NA	REMAIN	362.50	\$362.50
46	Areca palm	Dypsis lutescens	NA	8	50%	\$62.50	NA	REMAIN	362.50	\$362.50
47	Alexander palm	Pychosperma elegan.	NA	40	70%	\$30.00	NA	REMAIN	1,200.00	\$840.00
48	Areca palm	Dypsis lutescens	NA	8	50%	\$62.50	NA	REMAIN	362.50	\$362.50
49	Silver buttonwood	Conocarpus erectus	12	16	60%	\$362.50	NA	OFF-SITE	4,350.00	\$2,610.00
50	Silver buttonwood	Conocarpus erectus	12.5	16	30%	\$362.50	NA	OFF-SITE	4,531.25	\$1,359.38
53	Pink tabebuia	Tabubia rosea	4		60%			Remain		\$291.66

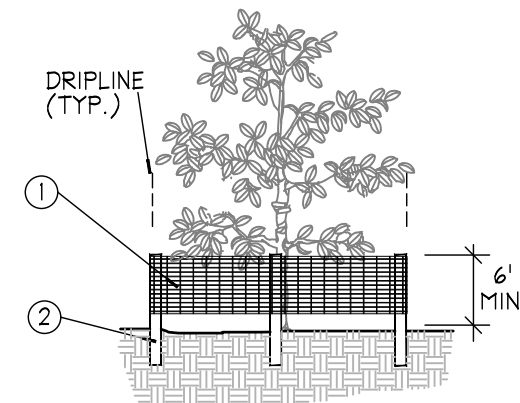

1. 6' PERIMETER PLUS' CONSTRUCTION FENCE BY CONWIED PLASTICS OR OWNER'S REPRESENTATIVE APPROVED EQUAL. SUBMIT PRODUCT INFORMATION FOR APPROVAL PRIOR TO INSTALLATION.
2. 8' TALL METAL 1" POSTS OR 2" X 2" X 8' PRESSURE TREATED WOOD POSTS WITH 24" BURIAL BELOW GRADE.


INSTALLATION NOTES:

- A. POST SELECTION SHOULD BE BASED ON EXPECTED STRENGTH NEEDS AND THE LENGTH OF TIME FENCE WILL BE IN PLACE. FLEXIBLE FIBERGLASS ROD POSTS ARE RECOMMENDED FOR PARKS, ATHLETIC EVENTS AND CROWD CONTROL INSTALLATIONS. METAL 1" POSTS OR TREATED WOOD POSTS ARE TYPICALLY USED FOR CONSTRUCTION AND OTHER APPLICATIONS.
- B. POSTS SHOULD BE DRIVEN INTO THE GROUND TO A DEPTH OF 1/4 OF THE HEIGHT OF THE POST. FOR EXAMPLE, A 8' POST SHOULD BE SET AT LEAST 2' INTO THE GROUND.
- C. SPACE POSTS EVERY 6' (MIN.) TO 8' (MAX.).
- D. SECURE FENCING TO POST WITH NYLON CABLE TIES (AVAILABLE FROM CONWIED PLASTICS). WOOD STRIPS MAY BE ALSO BE USED TO PROVIDE ADDITIONAL SUPPORT AND PROTECTION BETWEEN TIES AND POSTS.
- NOTE: IF WIRE TIES ARE USED, AVOID DIRECT CONTACT WITH FENCE. WIRE MAY DAMAGE FENCE OVER TIME.



PLANS ARE IN NAVD 1988 DATUM
CONVERSION EQUATION IS BELOW:
(NAVD 1988) + 1.58' = (NGVD 1929)

THE PRESENCE OF GROUNDWATER SHOULD BE ANTICIPATED. CONTRACTOR'S BID SHALL INCLUDE CONSIDERATION FOR ADDRESSING THIS ISSUE AND OBTAINING ALL NECESSARY PERMITS.

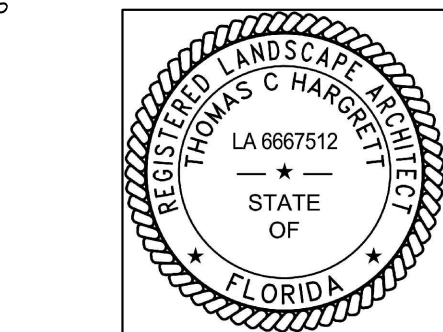

THE ITEM HAS BEEN DIGITALLY SIGNED AND SEALED BY TOM HARGRETT ON THE DATE ADJACENT TO THE SEAL.

PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES.

Always call 811 two full business days before you dig to have underground utilities located and marked.



Kimley»Horn

© 2025 KIMLEY-HORN AND ASSOCIATES, INC.
8201 PETERS ROAD, SUITE 2200, PLANTATION, FL 33324
PHONE: 954-535-5100 FAX: 954-739-2247
WWW.KIMLEY-HORN.COM REGISTRY No. 35106

LICENSED PROFESSIONAL
THOMAS C. HARGRETT, P.L.A.
FL LICENSE NUMBER
LA #6667512

KHA PROJECT
044203010
DATE
OCT 2025
SCALE AS SHOWN
DESIGNED BY TVC
DRAWN BY TVC
CHECKED BY GB

TREE DISPOSITION

**CYPRESS LANDING
CONDOMINIUM PARKING
LOT**
CITY OF POMPANO BEACH
POMPANO BEACH
FL

SHEET NUMBER
L0.00