


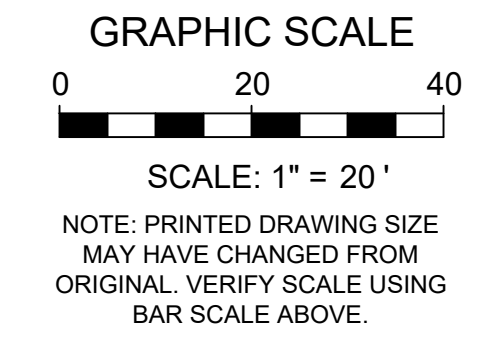

1. CONTRACTOR TO DEMOLISH EVERYTHING WITHIN THE LIMITS OF CONSTRUCTION UNLESS OTHERWISE NOTED.
- 1.1. ALL FLORIDA POWER AND LIGHT (FPL) INFRASTRUCTURE (POLES, WIRES, ETC.) TO BE REMOVED AND/OR RELOCATED BY FPL TO THE GREATEST EXTENT FEASIBLE.
2. EXISTING MONITORING WELLS TO BE REMOVED AND CAPPED A MINIMUM OF 5 FEET BELOW FINISHED GRADE. CONTRACTOR TO COORDINATE WITH ENVIRONMENTAL ENGINEER PRIOR TO DEMOLITION.
3. BUILDING DEMOLITION IS SUBJECT TO FEDERAL, STATE AND COUNTY RULES RELATING TO THE DEMOLITION AND THE HANDLING OF ASBESTOS CONTAINING MATERIAL. THE COUNTY STATEMENT OF RESPONSIBILITIES REGARDING ASBESTOS MUST BE FILLED OUT AND COMPLIED WITH PRIOR TO ANY

LEGEND	
#####	EXISTING LINEAR FEATURE TO BE REMOVED
	EXISTING SITE FEATURE TO BE REMOVED
	EXISTING PAVEMENT TO BE REMOVED
	EXISTING BUILDING TO BE REMOVED

SHEET TITLE	
DEMOLITION PLAN	
SHEET NUMBER	CD-104
PROJECT NUMBER	15083.00

STATUS: PRELIMINARY Drawing name: H:\15083.00 - Downtown Pompano - RP Development LLC\Engineering\Cadd\Phase 1\Infrastructure\15083.00-CD-XX-PH1.dwg Plotted by: dellas On 7/1/2026 6:02 PM