


UNT-C 1st. FLOOR PLAN
SCALE: 1/4" = 1'-0"

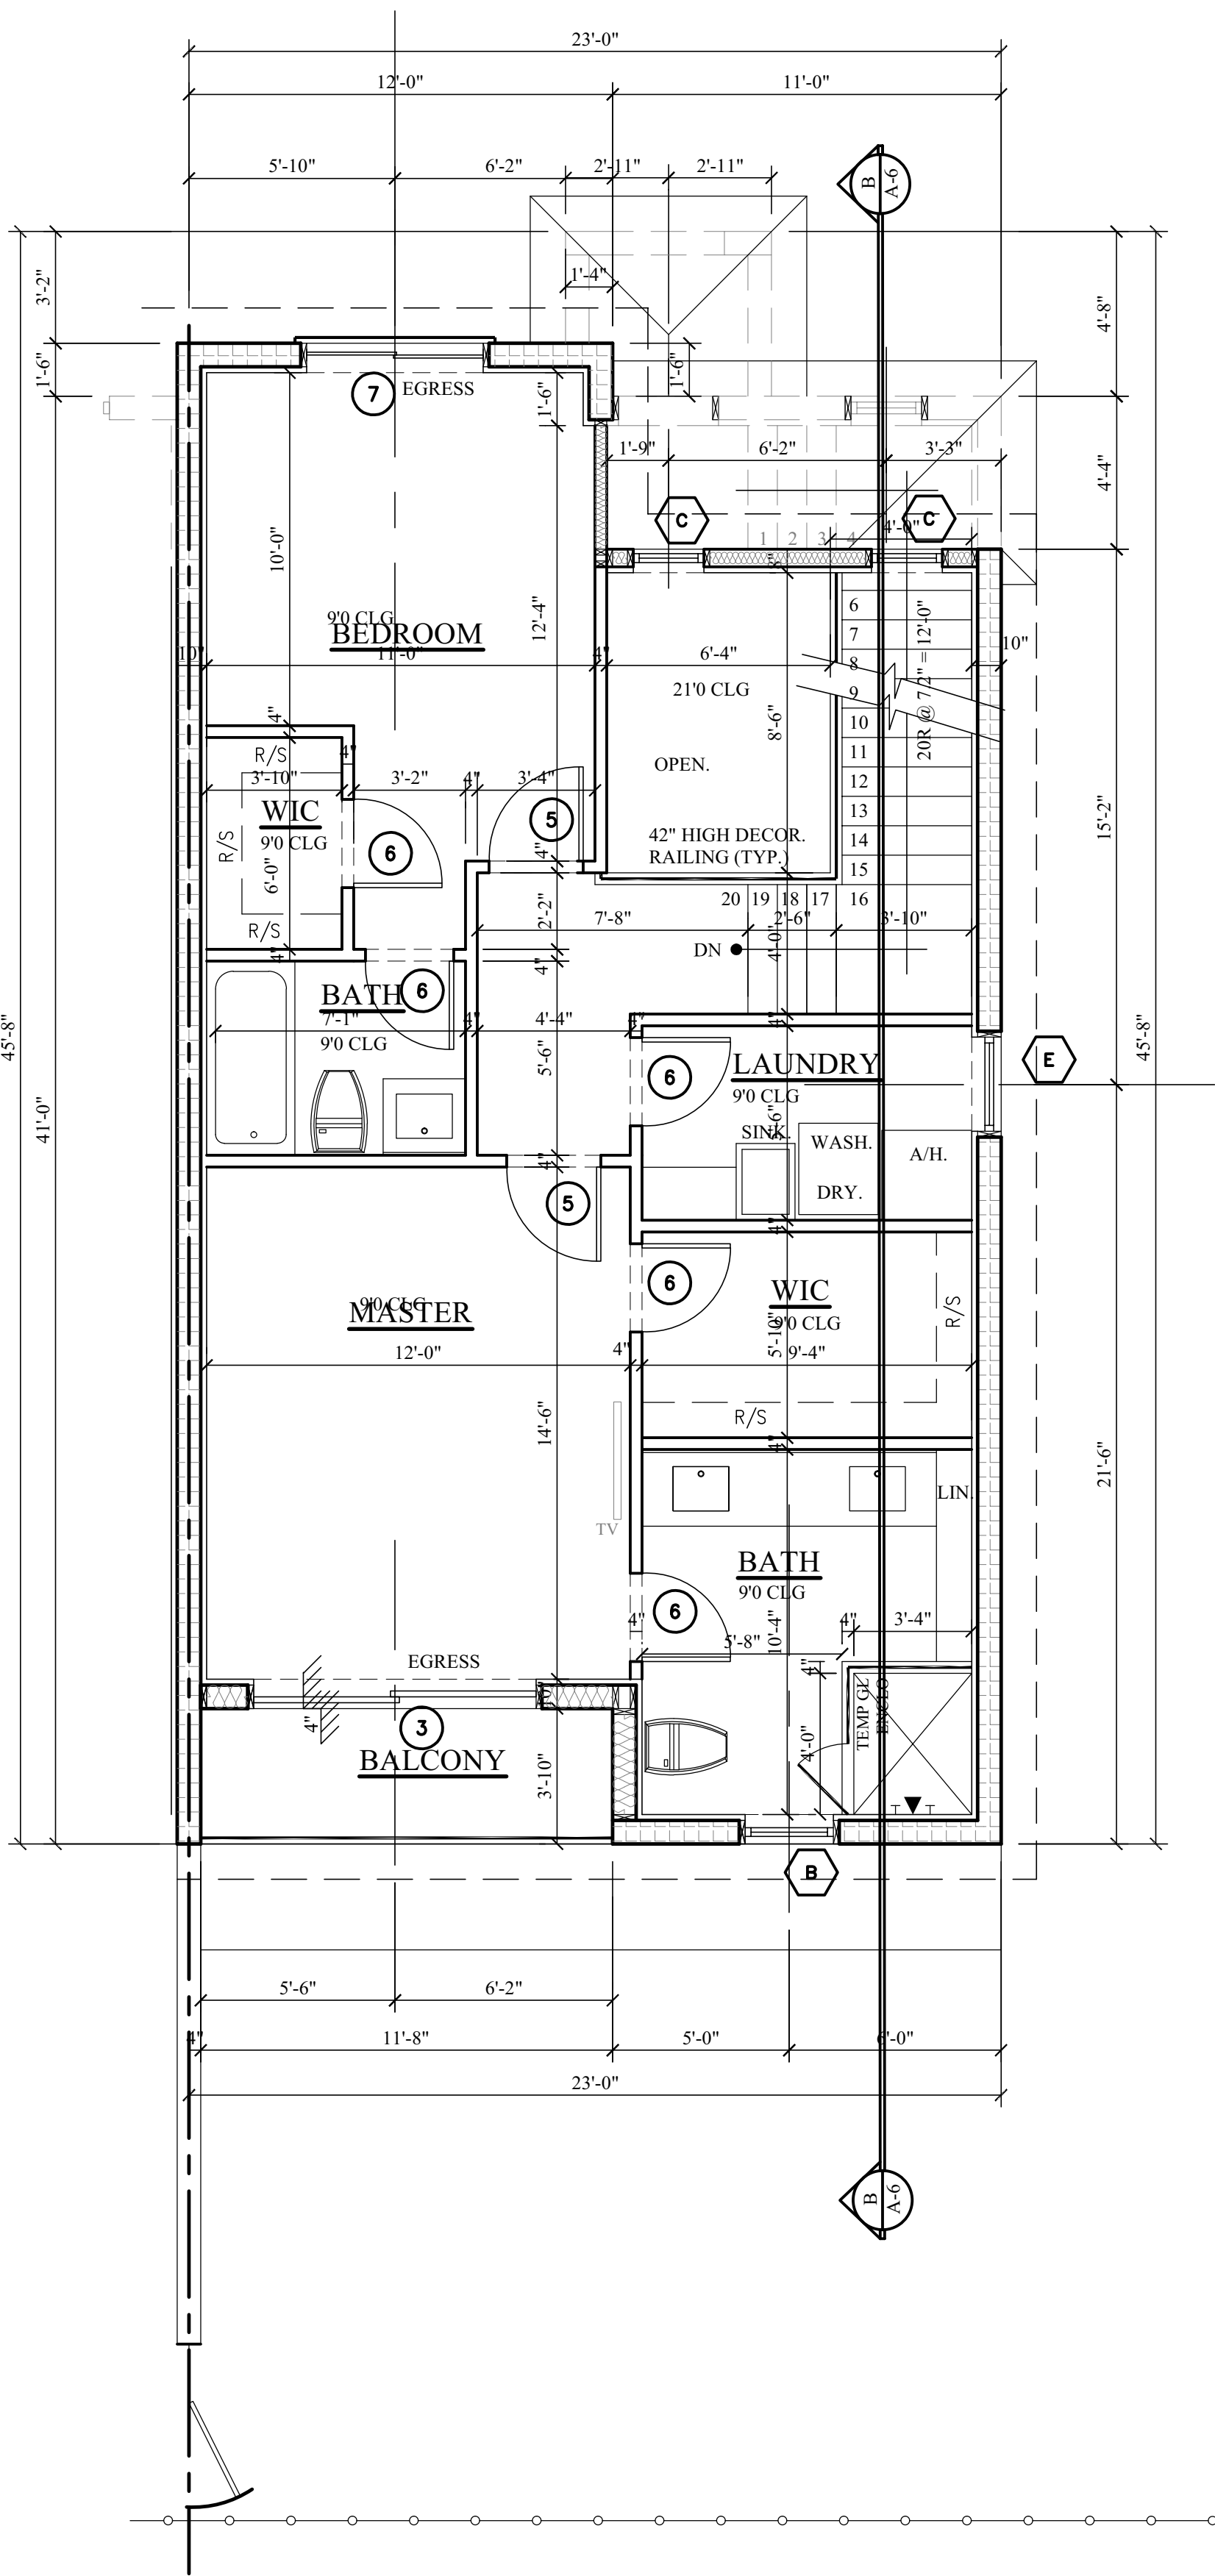

UNT-C 2nd. FLOOR PLAN
SCALE: 1/4" = 1'-0"

DOOR SCHEDULE

NO.	WIDTH	HEIGHT	THK.	QTY	BASE MAT'L	TYPE	FINISH	GLASS TYPE	REMARKS
1	8'-0"	8'-0"	1-3/4"	1	O.	REIN. MTL.	FNT.	--	OVERHEAD GARAGE DOOR
2	2'-8"	8'-0"	1-3/4"	1	F.G.	FRONT DR.	FNT.	IR.	W/ THRESHOLD & LOCK
3	8'-0"	8'-0"	1-3/8"	3	S.G.	ALUM.	FNT.	IR.	PRIVACY LATCH
4	2'-8"	8'-0"	1-3/4"	1	S.G.	WOOD	FNT.	--	20 MIN. FIRE RATED
5	2'-8"	8'-0"	1-3/4"	5	H.C.	WOOD	FNT.	--	PRIVACY LATCH
6	2'-6"	8'-0"	1-3/4"	5	H.C.	WOOD	FNT.	--	PRIVACY LATCH
7	5'-0"	8'-0"	1-3/8"	1	S.G.	ALUM.	FNT.	IR.	PRIVACY LATCH

NOTE: S.C. - SOLID CORE
H.C. - HOLLOW CORE
M.T. - METAL THRESHOLD
W.S. - WEATHER STRIPPING
STD/EXT. - STAINED EXTERIOR
AL - ALUMINUM
FNT. - PAINT
TEMP. - TEMPERED
F.G. - FIBER GLASS

ALL INTERIOR DOORS TO HAVE DIFFERENT
HOLDING APPLICATIONS - SEE INT. DESIGN
DRAWINGS, (I.D.D.)

IR - IMPACT RESISTANT
FD - FRENCH DOOR
FD.S.L. - FRENCH DOOR W/SIDE LITES
S.G. - SLIDING GLASS
S-F - BUILD
O. - OVERHEAD-GARAGE
W.G. - WIRE GLASS
W.D. - WOOD
ED - ELEVATOR DOOR
N.I.L.G. - NON-IMPACT INSULATED GLASS
SLD. - SLIDING DOOR

WINDOW SCHEDULE

LET.	SIZE	QTY	TYPE	HEAD HEIGHT (TOP OF WINDOW)	FRAME	GLASS	REMARKS
A	24'x36'	1	FT.G.	11'-0"	VINYL	IR	
B	20'x36'	1	FT.G.	8'-0"	VINYL	IR	
C	24'x24'	2	FT.G.	8'-0"	VINYL	IR	
D	32'x36'	1	FT.G.	8'-0"	VINYL	IR	
E	28'x0	1	S.H.	8'-0"	VINYL	IR	

NOTE:
1. WINDOW DESIGNATIONS ARE GENERIC.
2. WINDOWS SHALL HAVE WHITE FRAMES AND BRONZE TINTED GLASS.
3. ALL GLAZING AT HAZARDOUS LOCATIONS SUCH AS SLIDING DOORS, FRENCH DOORS, DOOR SIDELIGHTS, TUB AND SHOWER ENCLOSURES AND WINDOWS ETC. SHALL BE TEMPERED.
4. WINDOW AND DOOR MANUFACTURERS SHALL VERIFY THAT ANY GLAZING USED IN EXTERIOR WALLS SHALL MEET WIND LOAD DESIGNS AS SPECIFIED IN THE GOVERNING LOCAL BUILDING CODE.
5. T.D.L. - TRUE DIVIDED LITE
6. V.I.F. - VERIFY IN FIELD
7. AFF. - ABOVE FINISH FLOOR OF 1st, 2nd OR 3rd FINISH FLOOR
8. SEE EXTERIOR ELEVATIONS FOR ALL FINISH WORK DESIGN ON WINDOWS.
9. FT.G. FIXTURE TEMPERED GLASS


AREA CALCULATION:	
1ST FLOOR LIVING	725 S.F.
2ND FLOOR LIVING	736 S.F.
TOTAL LIVING AREA	1,461 S.F.
GARAGE	236 S.F.
COVERED ENTRY	25 S.F.
TRELLIS AREA	69 S.F.
BACONY	45 S.F.
NEW TOTAL UNDER ROOF	1,836 S.F.

WALL HEIGHT SCHEDULE

NOTE: ALL HEIGHTS ARE ABOVE FIN FLR OF LIVING ROOM (0'-0")

SEE FRAMING PLAN FOR ALL BOND BEAM SIZES AND LOCATIONS

+10'-8" AFF =	
1#5 VERTICAL IN CONC FILLED BLOCK CELL AT 4'-0" C/C MAX. SPACING	
+11'-8" AFF =	
1#5 VERTICAL IN CONC FILLED BLOCK CELL AT 3'-4" C/C MAX. SPACING	
+14'-0" AFF =	
1#5 VERTICAL IN CONC FILLED BLOCK CELL AT 3'-4" C/C MAX. SPACING	
+21'-4" AFF =	
1#5 VERTICAL IN CONC FILLED BLOCK CELL AT 3'-4" C/C MAX. SPACING	



Barretta & Associates
Architecture
Planning
Design

658 Normandy Ln. Bldg. N
Delray Beach, FL 33484
561-740-0041

CONSULTANT Archila
Design
GROUP
ARCHITECTURE
SERVICE

923 San Rafael Rd SW
Palm Bay, FL 32908
PHONE (321) 932-6470

N. RIVERSIDE
3 UNIT TOWNHOUSE BLDG

554 N. RIVERSIDE DR.
POMPANO BEACH, FL. 33062

Revisions:

All ideas designs arrangements and plans indicated or represented by this drawing are owned by, and the property of this office and were created, revised and developed for the use on and in connection with the specified project. None of such ideas designs arrangements or plans shall be used by or disclosed to any person, firm or corporation for any purpose whatsoever without the written permission of BARRETTA & ASSOCIATES. Written dimensions on these drawings shall have precedence over scale dimensions. Contractors shall verify and be responsible for all dimensions and conditions on the job and this office must be notified of any variation from the dimensions and conditions shown by these drawings.
Barretta & Associates 2021

Seal

Digitally signed
by James T
Barretta
Date:
2021.08.13
07:17:41 -0400

JAMES T. BARRETTA

UNIT -C
FLOOR PLANS

Project No:
21-054

Scale: AS SHOWN

Drawn by: J.B.
Designed by: J.B.
Reviewed by: OSCAR
Checked by: J.B.
Date: 8/11/2021

Sheet No:

DRC
PZ21-12000019
10/20/2021