


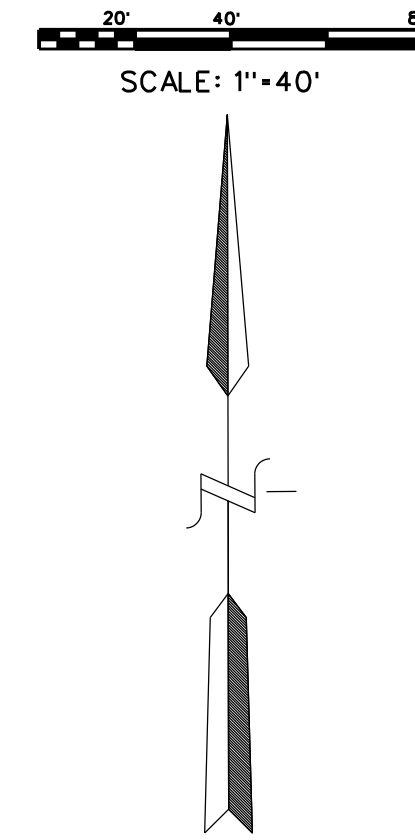

1. PRIOR TO ANY CONSTRUCTION, BALED HAY OR SILT SCREENS OR OTHER APPROVED SILT BARRIER SHALL BE INSTALLED BY THE EARTHWORK CONTRACTOR AS INDICATED ON THE PLANS. SILT SCREENS SHALL REMAIN IN PLACE DURING THE LENGTH OF CONSTRUCTION.
2. DURING CONSTRUCTION, INLET SEDIMENT FILTERS SHALL BE PLACED IN CATCH BASINS AND REMAIN IN PLACE TO PREVENT THE RUNOFF OF SILT OR OTHER POLLUTANTS INTO THE DRAINAGE SYSTEM. MIRAFI MAY BE USED FOR DITCH BOTTOM INLETS. DETAIL SHEET 06-01 SEDIMENT BARRIERS.
3. ANY LOOSE SILT LEAVING THE SITE MUST BE CLEANED FROM THE ADJACENT ROADWAY ON A DAILY BASIS.

1. PROVIDE TREE PROTECTION OF ALL SITE TREES TO REMAIN. TREE PROTECTION PER CITY OF POMPANO BEACH STANDARD DETAIL. CONTRACTOR TO OBTAIN DETAIL FROM CITY ENGINEER OR CITY FORESTER.
2. PROVIDE FOR WEEKLY INSPECTION BY THE CONTRACTOR AND AFTER EVERY 0.25 INCH RAINFALL.
3. PROVIDE AND LOCATE RAIN GAUGE ON SITE TO MEASURE RAINFALL ACTIVITY.
4. EROSION CONTROL MEASURES MUST MEET ALL THE REQUIREMENTS OF THE CITY OF PLANTATION EROSION CONTROL PROCEDURES AND THE FLORIDA STORMWATER, EROSION AND SEDIMENT CONTROL INSPECTOR'S MANUAL.
5. ALL EROSION AND SEDIMENT CONTROL MEASURES, BMPs MUST BE MAINTAINED AS REQUIRED BY THE CITY FOR THE DURATION OF THE PROJECT.
6. LDB BOOK OF ALL EROSION CONTROL INSPECTIONS MUST BE KEPT AND MAINTAINED ON SITE.
7. SPILL RESPONSE EQUIPMENT MUST BE ON-SITE AT ALL TIMES.

1. CONTRACTOR SHALL COMPLY WITH THE LATEST EDITION OF THE THE FOOT STANDARD SPECIFICATIONS FOR ROAD & BRIDGE CONSTRUCTION 104, PREVENTION, CONTROL, AND ABATEMENT OF EROSION & WATER POLLUTION.



1. THE CONTRACTOR SHALL RETAIN A CERTIFIED SWPPP SPECIALIST FOR PURPOSES OF INSPECTING THE SITE TO ENSURE COMPLIANCE WITH THE SWPPP REQUIREMENTS PURSUANT TO THE NOTICE OF INTENT, AS WELL AS THE CITY OF POMPANO BEACH.
2. INSPECTION REPORTS SHALL BE PREPARED AND SUBMITTED WEEKLY TO THE CITY OF POMPANO BEACH, AND COPIED TO THE ENGINEER OF RECORD.

1. TO MEET BEST MANAGEMENT PRACTICES PROVISIONS, GRAVEL TO BE USED AT ALL TIMES THROUGHOUT CONSTRUCTION IN ORDER TO PREVENT ANY SOILS FROM BEING TRACKED ONTO THE PUBLIC RIGHT OF WAY.

1. PRIOR TO ANY TREE REMOVAL OR CLEARING, CONTRACTOR SHALL REFER TO APPROVED LANDSCAPE OR TREE DISPOSITION PLAN PREPARED BY OTHERS REGARDING TREE PRESERVATION, RELOCATION, ETC.
2. EXISTING TREES ON SITE NOT SHOWN ON CIVIL ENGINEERING PLANS PREPARED BY A. J. HYDRO ENGINEERING, INC.
3. CONTRACTOR SHALL APPLY FOR ANY CLEARING, TREE REMOVAL, RELOCATION AND/OR TREE PRESERVATION PERMITS, AND ANY OTHER PERMITS AS REQUIRED BY THE CITY OF POMPAUD BEACH PRIOR TO COMMENCING CONSTRUCTION.

1. ALL ELEVATIONS SHOWN ON THIS PLAN ARE BASED ON THE NAVD 88 DATUM.

BCE	BROWARD COUNTY RECORDS
BFI	BASE FLOOD ELEVATION
BFP	BACKFLOW PREVENTOR
C & G	CURB & GUTTER
CBS	CATCH BASIN
CLF	CONCRETE BLOCK STUCCO
CPP	CHAIN LINK FENCE
DE	CONCRETE POWER POLE
EXP	DRAINAGE EASEMENT
FL	EQUIPMENT CONCRETE PAD
FH	EXISTING
GV	FINISHED FLOOR ELEVATION
HLE	FIRE HYDRANT
INV	GATE VALVE
PB, PG	HAND HOLE
PL	INVERT
R/W	PLAN BOOK & PAGE
SDMH	PROPERTY LINE
TYE	RIGHT OF WAY
WM	STORM DRAIN MANHOLE
YD	TYPICAL
	UTILITY EASEMENT
	WATER MAIN
	WOOD POWER POLE
	YARD DRAIN

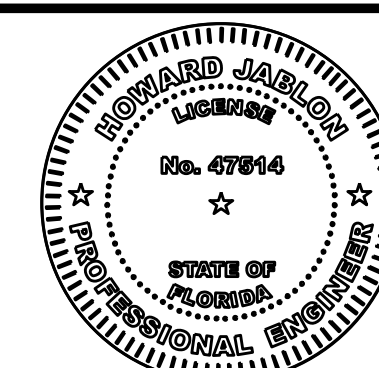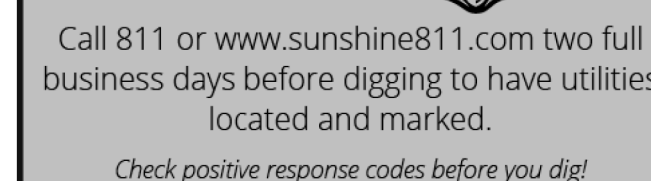

THIS ITEM HAS BEEN DIGITALLY SIGNED AND SEALED
BY HOWARD E JABLON ON THE DATE ADJACENT TO THE
SEAL.

PRINTED COPIES OF THIS DOCUMENT ARE NOT
CONSIDERED SIGNED AND SEALED AND THE SIGNATURE
MUST BE VERIFIED ON ANY ELECTRONIC COPIES.

[illegible]

AJ HYDRO
ENGINEERING, INC.
5932 NW 73RD COURT
PARKLAND, FL 33067
TEL (954) 347-3397
AJHYDRO@BELLSOUTH.NET

PROJECT:

COASTAL RECYCLING OF POMPANO
COASTAL 16 – CNG

2407 HAMMONDVILLE ROAD
POMPANO BEACH, FLORIDA

TITLE:

STORMWATER POLLUTION PREVENTION & EROSION CONTROL PLAN

SEAL:

DATE:

06/15/26

DRAWING NO.

22-0111

SHEET NO.

HOWARD JABLON, PE
#47514