

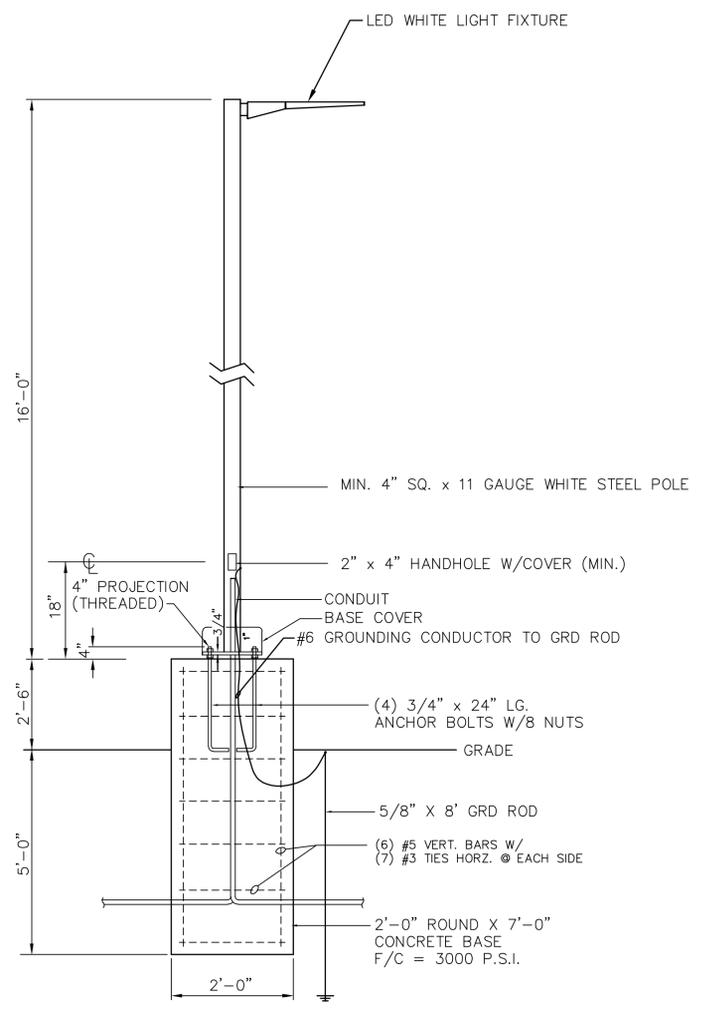


POMPAÑO PARKWAY - STATE ROAD #845  
(POWERLINE ROAD - S.W. 25th. AVENUE)

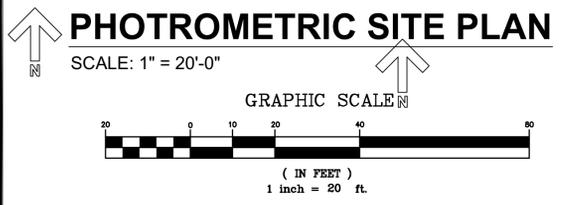

AREA LIGHT POLE  
WINDLOAD ASCE 7-16, 175 MPH  
SCALE: N.T.S




Label	CalcType	Units	Avg	Max	Min	Avg/Min	Max/Min
ALL CALC POINTS	Illuminance	Fc	7.56	61.9	0.0	N.A.	N.A.
CANOPY	Illuminance	Fc	49.68	61.9	29.3	1.70	2.11
INSIDE CURB	Illuminance	Fc	10.12	38.4	1.4	7.23	27.43

Symbol	Qty	Label	Arrangement	Description	Mounting Height	LLD	LLF	Arr. Lum. Lumens	Arr. Watts
[Symbol]	24	A	Single	CRUS-SC-SS-50	15'	1.000	1.000	13980	93
[Symbol]	3	B	Single	XWM-FT-LED-06L-50	10'	1.000	1.000	6557	47
[Symbol]	3	C	Single	SLM-LED-18L-SIL-FT-50-70CRI-SINGLE	16' POLE+2'-6" BASE	1.000	1.000	18904	135
[Symbol]	9	D	Single	DL36RW-T50 FIXTURE BY OTHER	10'	1.000	1.000	1888	34.18



DESIGN TEAM TITLE:  
**MDM SERVICES, INC.**  
engineering • environmental • construction  
2151 W. HILLSBORO BLVD, DEERFIELD BEACH, FLORIDA 33442  
Phone: (954) 427-3076  
FLORIDA CA #4857

NO.	DATE	REVISION DESCRIPTION



PROJECT DESCRIPTION:  
**NEW C-STORE**

SITE DESIGNATION:  
**SUNSHINE GASOLINE DISTRIBUTORS CHEVRON GAS STATION #010**

SITE ADDRESS:  
**301 POMPAÑO PKWY, POMPAÑO BEACH, FL 33069**

SCALE: AS NOTED MDM JOB # 21119  
DATE: 08-11-2022  
DESIGNED BY:  
DRAWN BY: FILE NAME:  
CHECKED BY: 21119 CD.DWG

DRAWING TITLE:  
**PHOTOMETRIC SITE PLAN**  
SHEET NO.:  
**PH 10**

LIGHTING PROPOSAL LO-158304  
SUNSHINE #010  
301 POMPAÑO PARKWAY  
POMPAÑO BEACH, FL  
BY: MME DATE: 06-26-23 REV: SP OF: 1

