DRC
PZ22-12000042
02/01/2023

Luminaire Schedule								
Symbol	Qty	Label	Arrangement	Description	LLF	Luminaire Lumens	Luminaire Watts	Total Watts
	3	WA	Single	Cree Lighting OSQL-B-30L-40K7-4M-XX-NM-XX, Wall Mount	0.900	29097	202	606
	9	SB	Single	Cree Lighting OSQL-B-30L-40K7-4M-XX-NM-XX / OSQ-BLSLF, Pole Mount	0.900	22298	202	1818

Calculation Summary							
Label	CalcType	Units	Avg	Max	Min	Avg/Min	Max/Min
SPill	Illuminance	Fc	0.04	0.5	0.0	N.A.	N.A.
Parking Lot	Illuminance	Fc	3.05	8.8	1.0	3.05	8.80

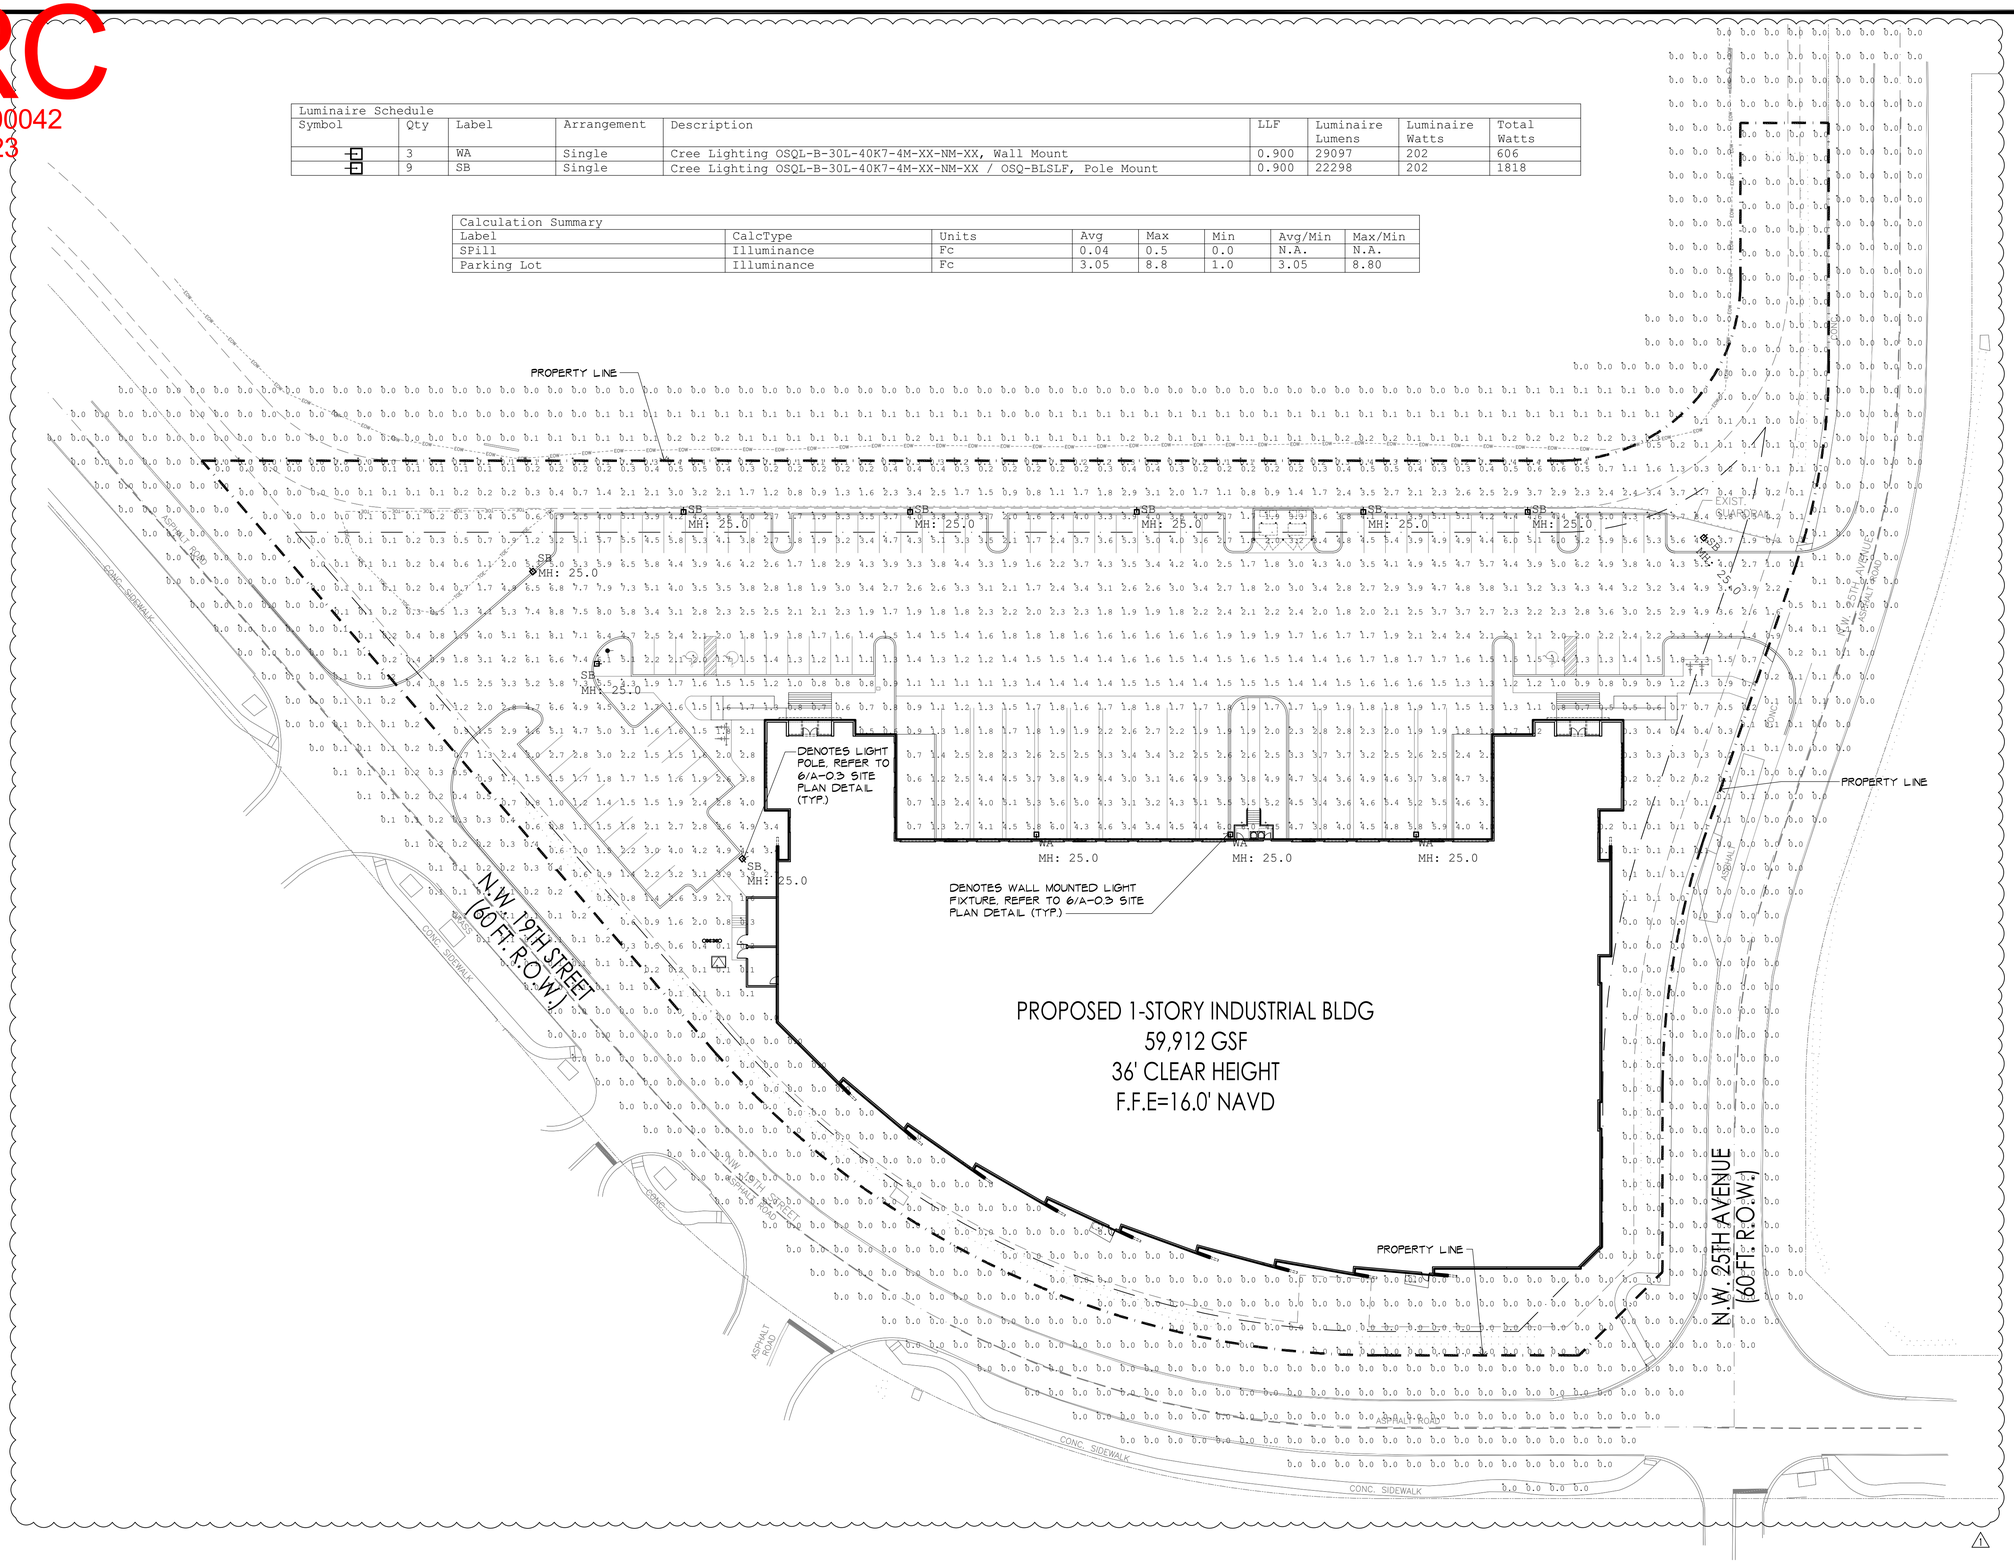

1
1"=30'-0"
PHOTOMETRICS SITE PLAN

FIRST POMPANO LOGISTICS CENTER I

2551 NW 19th Street
Pompano Beach, FL 33069

NO.	DATE: REVISION
1	2022-12-26 DRC COMMENTS

ALL DRAWINGS, SPECIFICATIONS AND RELATED DOCUMENTS ARE THE COPYRIGHT PROPERTY OF THE ARCHITECT AND MUST BE RETURNED UPON REQUEST. REPRODUCTION OF DRAWINGS, SPECIFICATIONS AND RELATED DOCUMENTS IN PART OR WHOLE IS FORBIDDEN WITHOUT THE ARCHITECT'S WRITTEN PERMISSION.

CONTRACTOR MUST CHECK AND VERIFY ALL DIMENSIONS AND FIELD CONDITIONS AND NOTIFY ARCHITECT/ENGINEER IMMEDIATELY OF ANY DISCREPANCIES.

HNM ARCHITECTURE
3705 North Federal Highway • Delray Beach, Florida 33483 • T. 561.733.2225
info@hnm-architecture.com • AA26000726 • www.hnm-architecture.com

STATE OF FLORIDA REGISTERED ARCHITECT AR 0017270 MICHAEL W. HANLON

Digitally signed by Michael Hanlon
Date: 2022.12.27 16:24:26-05'00'

MICHAEL W. HANLON
FLORIDA REGISTERED ARCHITECT REG. NUMBER: AR0017270
ELECTRONIC SIGNATURE SERIAL NUMBER:

HNM PROJECT NUMBER: 20-043.1
ISSUED DATE: 2022-11-17
SCALE: 1" = 30'-0"

TITLE: PHOTOMETRICS SITE PLAN

DRAWING NUMBER: A-0.2