Digitally signed by Brian Bullock
DN: c=US, st=Florida, l=Deerfield Beach, o=The Benedict Bullock Group, P.A., cn=Brian Bullock, email=brian@tbbg.net
Location: DEERFIELD BEACH, FL
Date: 2022.08.25 11:25:24 -04'00
Adobe Acrobat version: 2022.002.20191

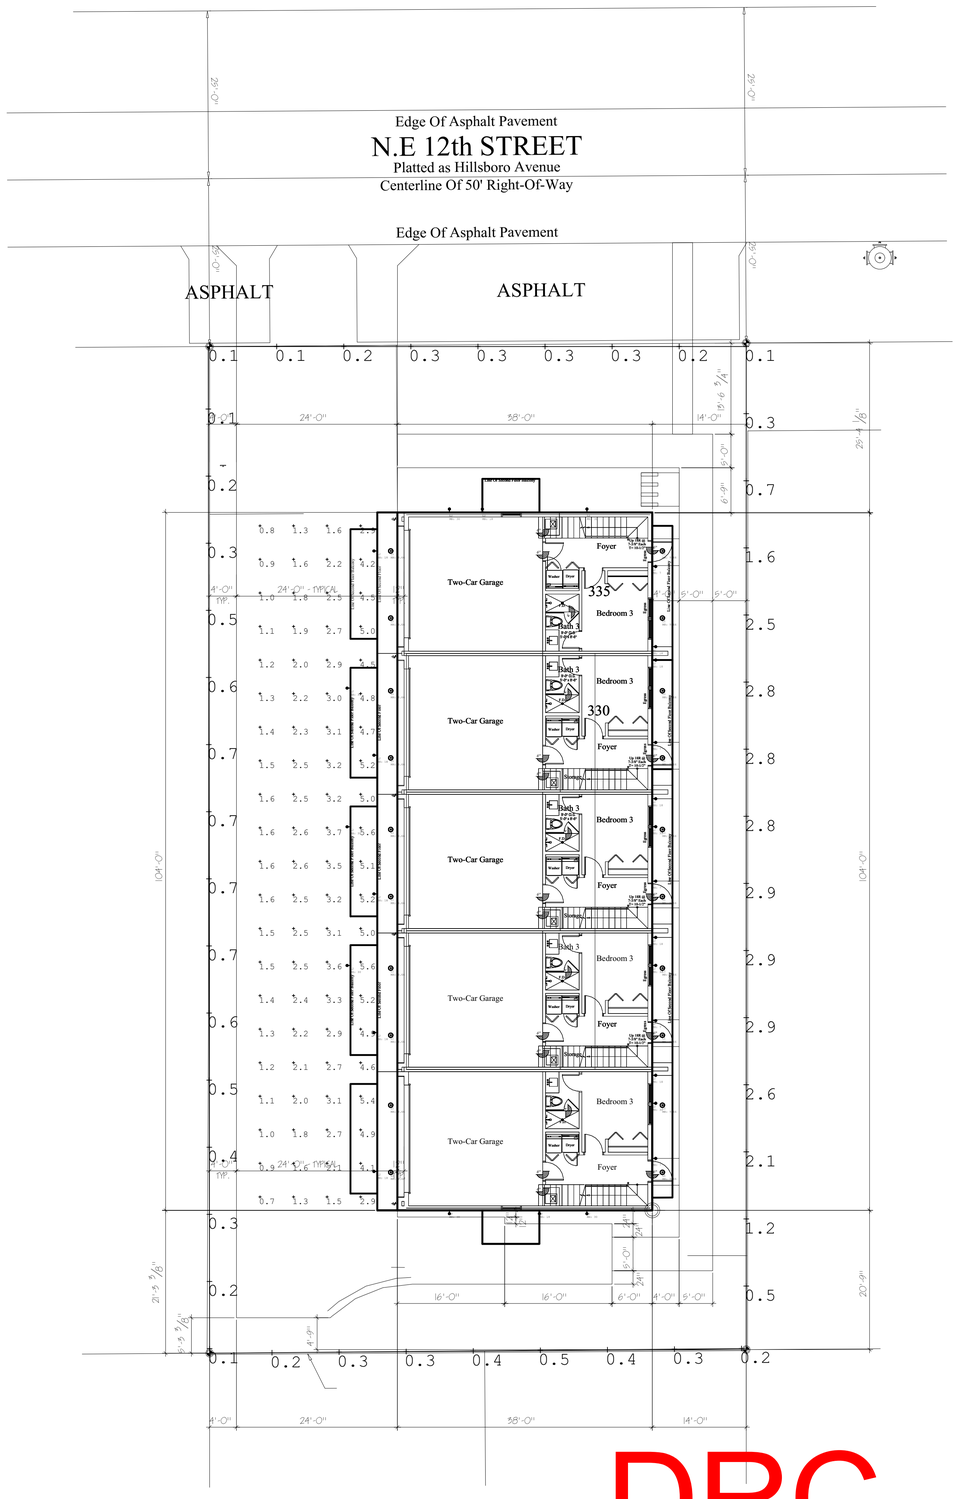

DRC
PZ22-12000015
10/5/2022

LUND
EW3207
WALL

PROJECT

DESCRIPTION
High powered LED exterior two light wall mount fixture, die-cast aluminum housing molded into a cylinder shape with in powder coated black or gray finishes. Concealed inside is our 120V AC LED technology with a tempered glass diffusers radiating light upward and downward against the wall where installed. Certified ETL wet location listed and is available in different sizes and one light options.

EW3207-BK Black
EW3207-GY Gray

SPECIFICATION DETAILS
* For custom options, consult factory for details.

Fixture Dimensions	D3-1/2" x H7" x E4-1/2"
Light Source	AC LED Module
Wattage	20W
Total Lumens	1700lm
Delivered Lumens	BK-1371lm; GY-1389lm;
Voltage	120V
Color Temperature	3000K
CRI (Ra)	90CRI
Optional Color Temps	2700K - 5000K Available, Minimum Order Quantities Apply
LED Rated Life	50,000 hours
Dimming	100% - 10%, ELV Dimmer (Not Included)
Diffuser Details	Parabolic Aluminum Reflector
Glass Details	Clear Glass
Location	Wet
Warranty	5 Years
Illumination Direction	Up and Down
Canopy Dimensions	W4-1/2" x H4-1/2" x E1/2"

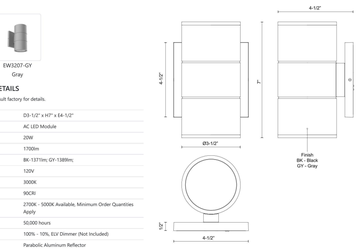

KUZCO
19054 28TH AVENUE
SURREY - BC V3Z 6M3
CANADA
WWW.KUZCOLIGHTING.COM

COMMENT

BAILEY
EC44509
CEILING

PROJECT

DESCRIPTION
Circular cast aluminum body and frame. Lightly textured powder-coat finish. Round opal polymeric diffuser. Outward emitting light. Rated for exterior use. Custom options available.

EC44509-BK Black
EC44509-GY Gray

SPECIFICATION DETAILS
* For custom options, consult factory for details.

Fixture Dimensions	D8-3/4" x H1-1/2"
Light Source	AC LED Module
Wattage	20W
Total Lumens	1600lm
Delivered Lumens	BK-1234lm; GY-1272lm;
Voltage	120V
Color Temperature	3000K
CRI (Ra)	90CRI
Optional Color Temps	2700K - 5000K Available, Minimum Order Quantities Apply
LED Rated Life	50,000 hours
Dimming	100% - 10%, ELV Dimmer (Not Included)
Diffuser Details	Frosted PC Diffuser
Location	Wet
Warranty	5 Years
Mounting Style	All Orientation; Ceiling and Wall;



KUZCO
19054 28TH AVENUE
SURREY - BC V3Z 6M3
CANADA
WWW.KUZCOLIGHTING.COM

COMMENT

Luminaire Schedule									
Symbol	Qty	Label	Arrangement	Description	Tag	LLF	Luminaire Lumens	Luminaire Watts	Total Watts
	20	L1	Single	EW44509-BK		0.900	1234	19.4	388
	27	L2	Single	EW3207-BK		0.900	1371	19.7	531.9

Calculation Summary							
Label	CalcType	Units	Avg	Max	Min	Avg/Min	Max/Min
DRIVELANE	Illuminance	Fc	2.73	5.6	0.7	3.90	8.00
PROPERTY LINE	Illuminance	Fc	0.86	2.9	0.1	8.60	29.00

REVISIONS

NO.	DATE	DESCRIPTION

12th STREET 5-UNIT TOWNHOMES

3232 N.E. 12th Street
Pompano Beach, Florida 33062

THE BENEDICT BULLOCK GROUP, PA (TBBG) ARCHITECTURE & PLANNING HEREBY RESERVES ITS COPYRIGHT AND OTHER PROPERTY RIGHTS IN THESE PLANS, IDEAS, AND DESIGNS. SAME SHALL NOT BE REPRODUCED, CHANGED, OR COPIED IN ANY FORM OR MANNER, NOR SHALL BE ASSIGNED TO ANY THIRD PARTY WITHOUT FIRST OBTAINING WRITTEN PERMISSION FROM TBBG. CONTRACTOR SHALL CHECK AND VERIFY ALL DIMENSIONS ON SITE PRIOR TO CONSTRUCTION. THESE DRAWINGS MUST NOT BE SCALED.

The Benedict Bullock Group, PA
ARCHITECTURE ■ PLANNING
1525 NW 3RD STREET SUITE NO.1
DEERFIELD BEACH, FLORIDA 33442
(954) 570-9500 FAX (954) 570-9550
www.thebenedictgroup.com Lic. No. AA 26003089

Architect
AR 95754

SHEET DESCRIPTION
PHOTOMETRIC PLAN

SCALE 3/32"=1'-0"
DATE 07-01-2022
DRAWN & CHECKED AS
JOB NUMBER BM 2206
DRAWING NUMBER PM-1

P:\Amar\Autocad Projects\12th ST 5-UNIT TWNHMS 5' LANDSCAPE PER CITY 08-02-2022 #BM2206\Sheets\PM-1 PHOTOMETRIC PLAN.dwg, 8/3/2022 11:51:53 AM, AutoCAD PDF (General Documentation).pc3