


Channel Letters on Raceway

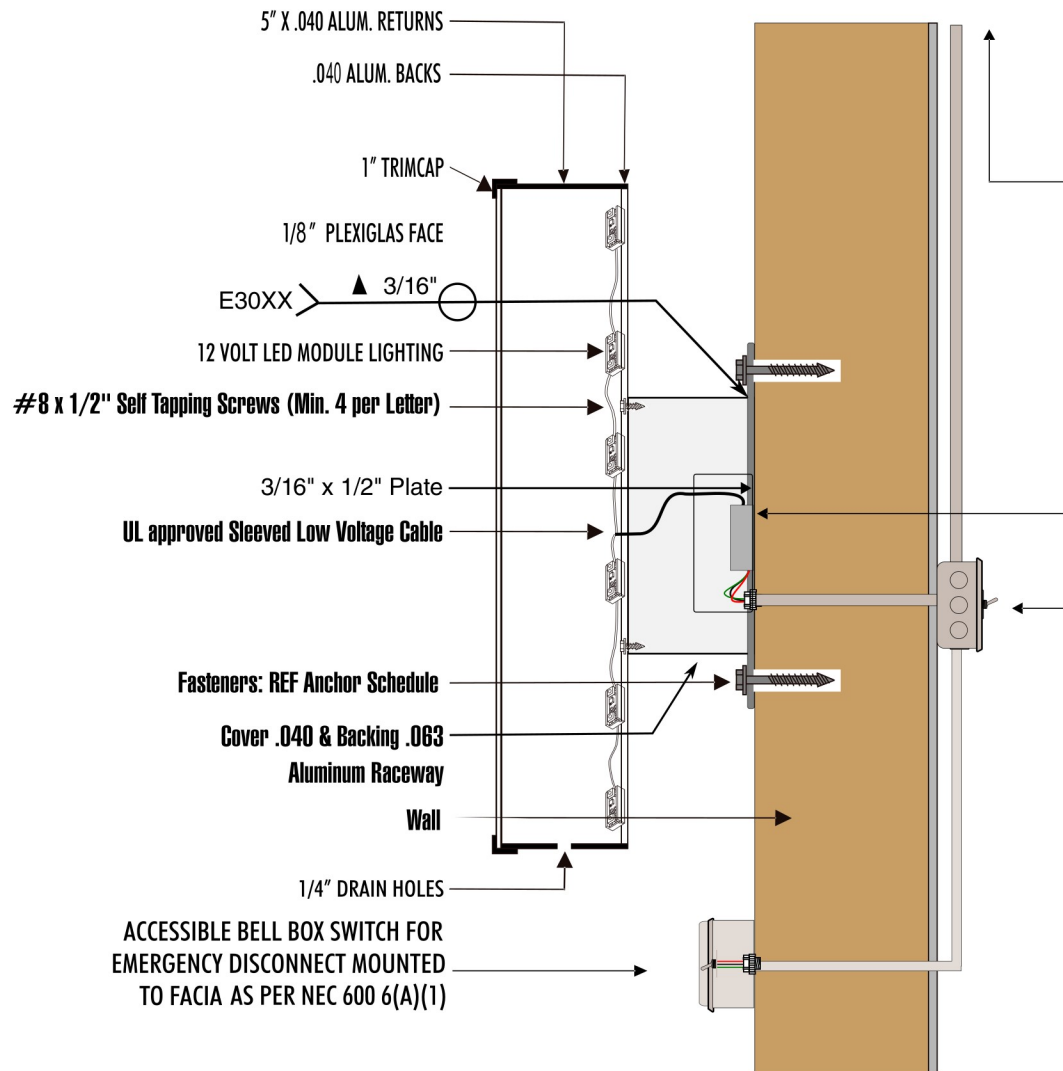

PRIMARY #12 MIN. THHN THWN ELECTRICAL SIGNAGE HOOKUP
 5' ELECTRICAL PIGTAIL; INSIDE 1/2" MIN. TYPE RW
 FLEXIBLE CONDUIT OR UL APPROVED EQUAL AS REQUIRED
110v 20AMP circuit Grounded as per 250.118. 3. C405.2.4

LED POWER SUPPLY

UL APPROVED WEATHER PROOF, 20 AMP ELECTRICAL SERVICE
 LOCKABLE DISCONNECT SWITCH (@ MAIN PANEL) AS PER NEC
 600.6(A)(1), CONNECTED TO TIME CLOCK OR PHOTOCELL AS
 PER SFBC 4503.5C REQUIREMENTS.

Astronomical timeclock with 10 hour

**Backup or photocell as per NEC 600.8(A), 600.5(C)(3),
 600.7(A). As Per 2023 FBC B Appendix H104 Specify Lable.**

Anchor Schedule	Wall				
@4' OC T&B	Masonry	Stucco Over Wood	Metal	Concrete	Wood
3/8" X 3" Sup-R-Sleeve	●			●	
1/4" Bolts Thru Wall	●	●	●	●	●
1/4" x 2-3/4" Tap Cons	●			●	
3/8" x 3.5" Lag Bolts					●
3/8" X 4" Toggle Bolts			●		●
3/8" x 3.5" Exp. Anchors	●			●	
#14 x 2-1/2" Self Tapping Screws			●		
# 8 x 3" Wood Screws					●
1/4" x 4" Tapcons		●			
# 8 x 4" Wood Screws		●			

Copies of this document are not considered signed & sealed and the signature must be verified on any electronic copies.



AAC

PZ24-30000013
 01/06/2026

754-300-9493

Customer: