




(2" cal. and over) LARGE TREE PLANTING DETAIL

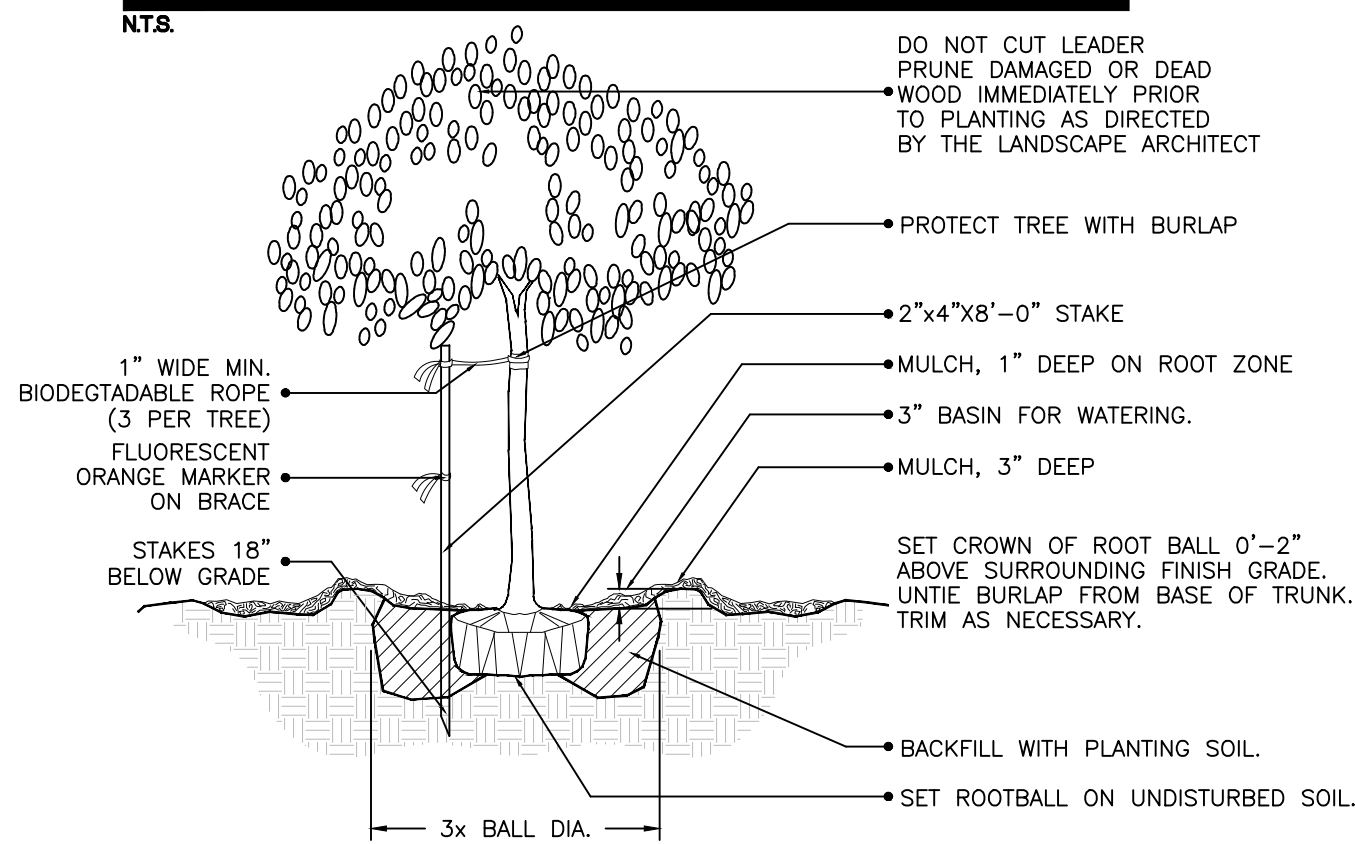

(2" cal. and under) SMALL TREE PLANTING DETAIL

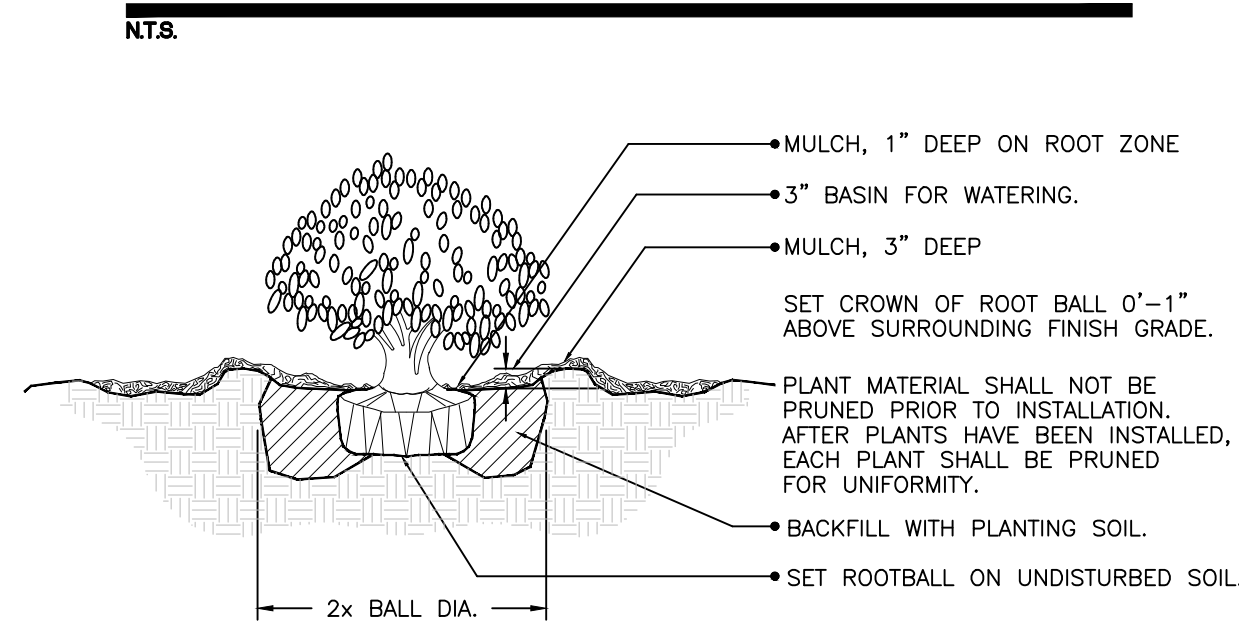


SHRUB PLANTING DETAIL

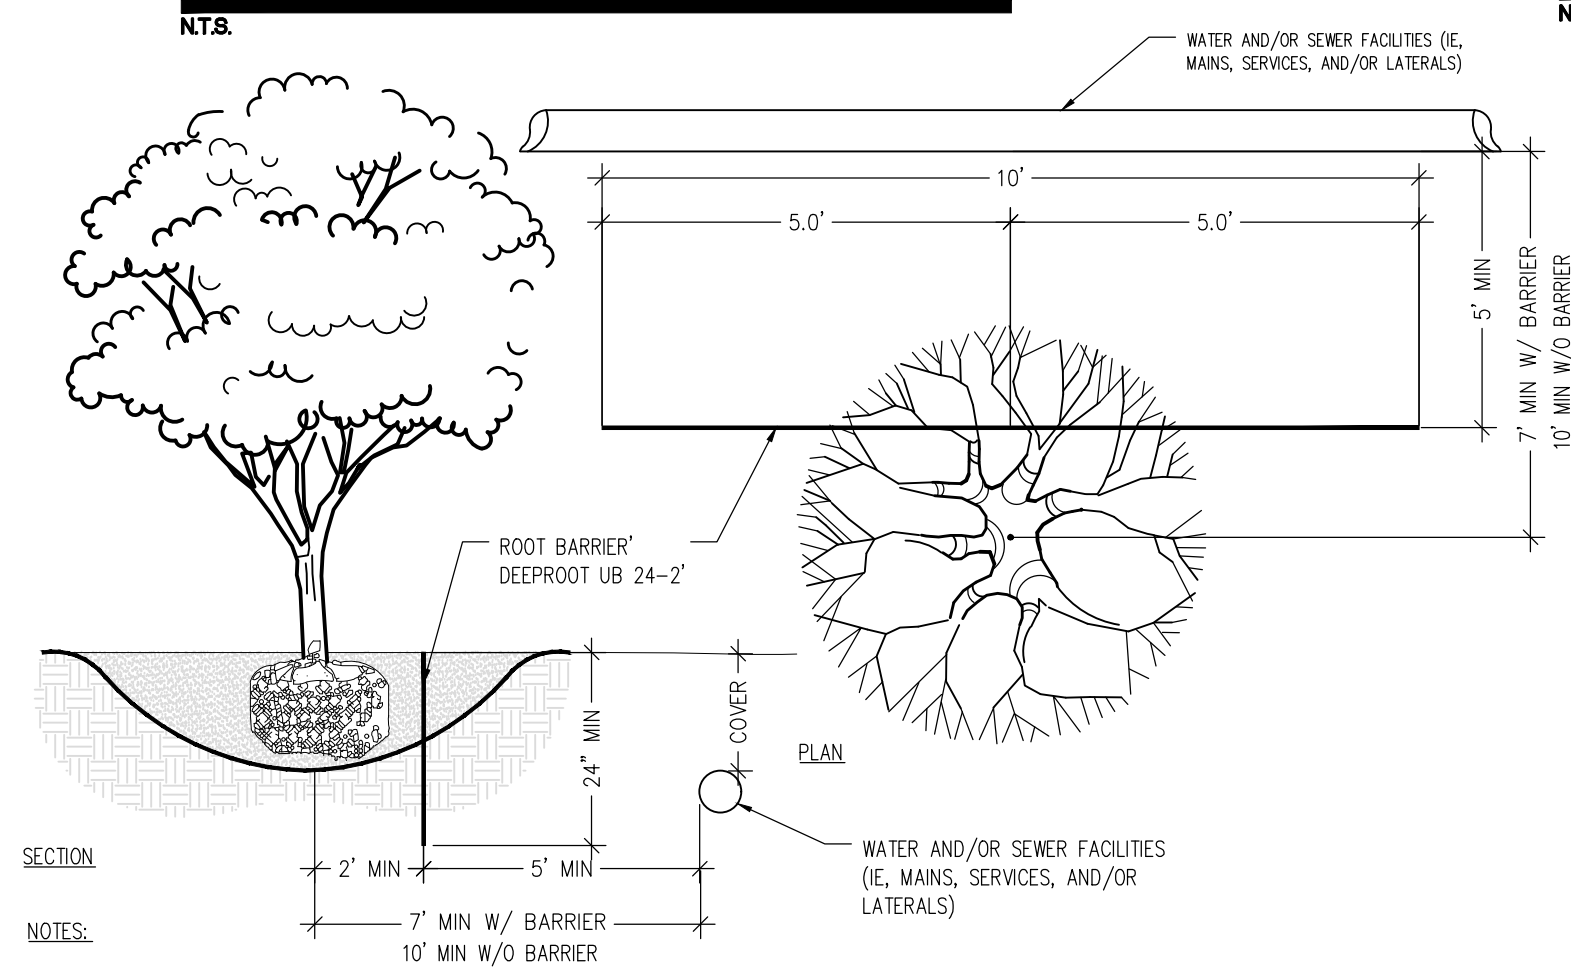


ROOT BARRIER DETAIL


NTS.

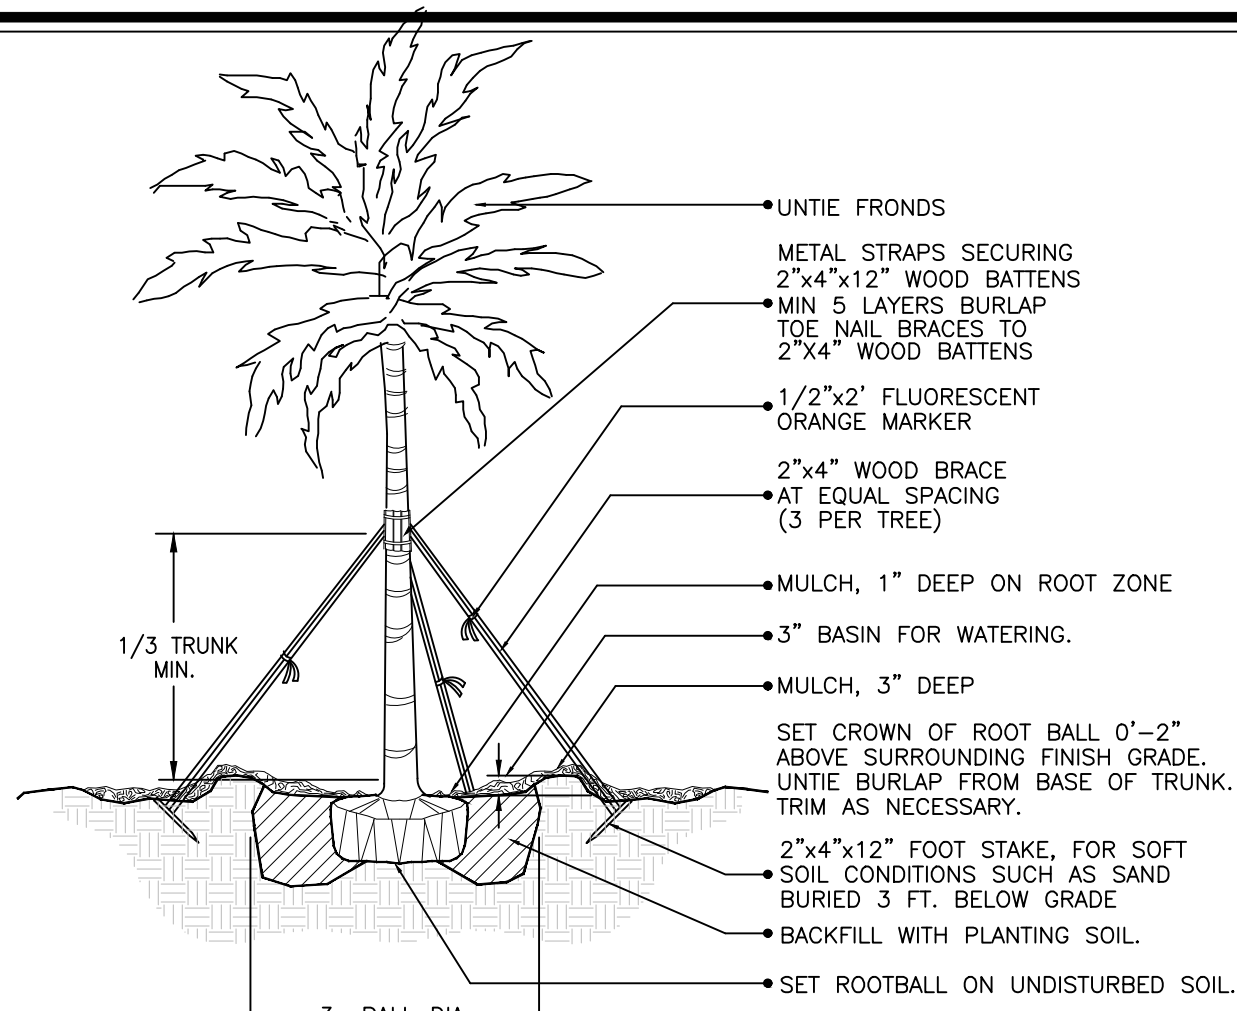

LARGE PALM PLANTING DETAIL

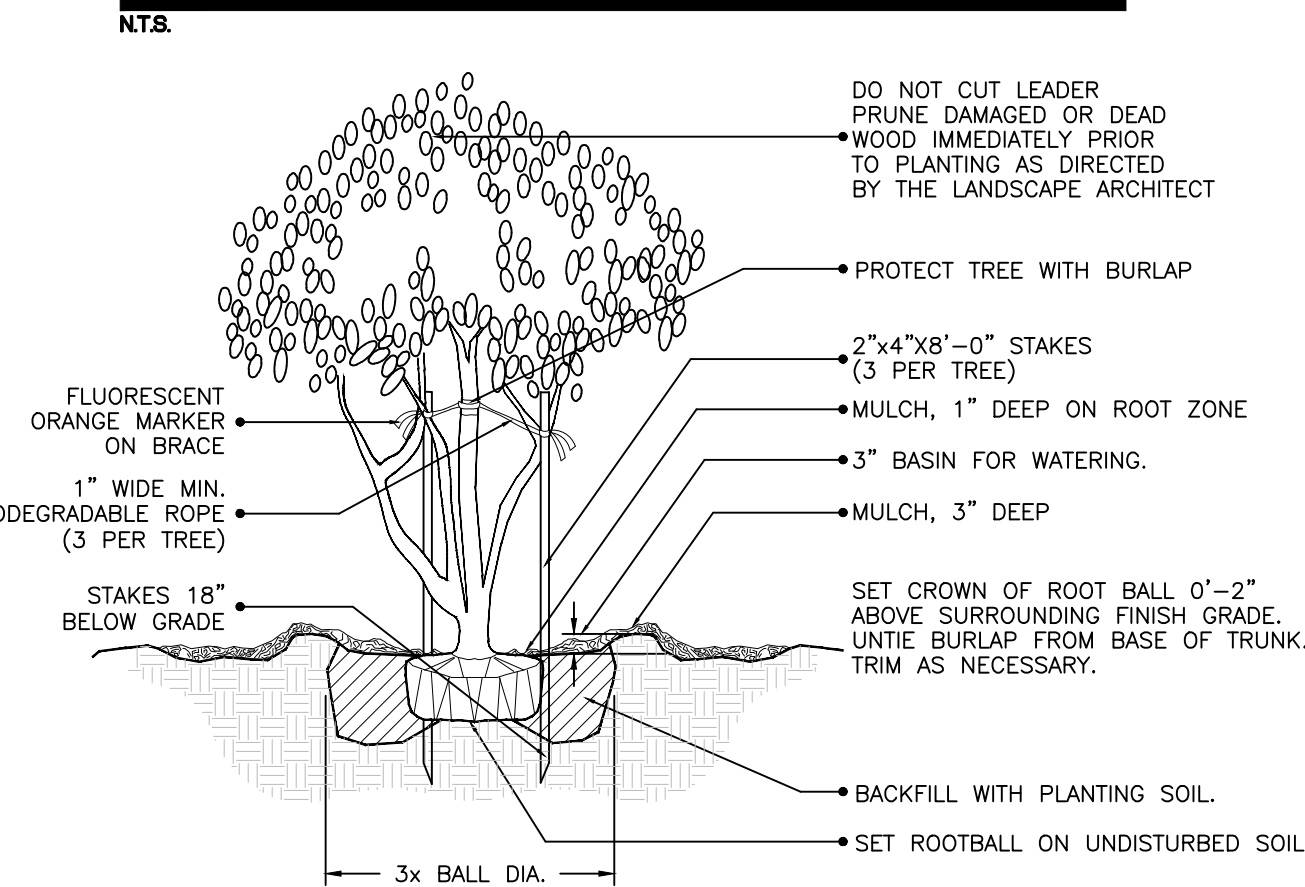


MULTI- TRUNK AND SMALL TREE (2" cal. and under) PLANTING DETAIL

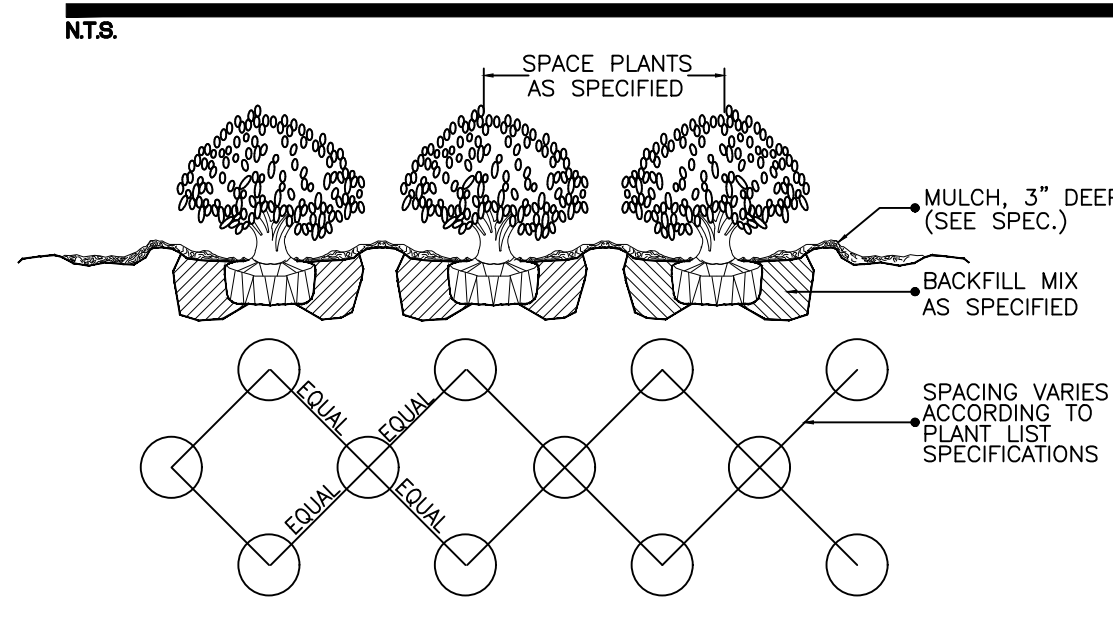

SHRUB / GROUNDCOVER SPACING / PLANTING DETAIL

NTS.

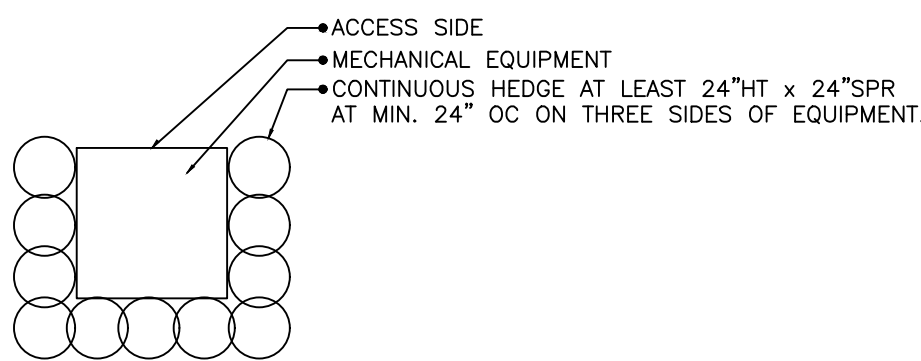

MECHANICAL EQUIPMENT SCREENING

NTS.

GENERAL NOTES:

1. PLANT MATERIAL: All plant material shall be Florida #1 or better as established by "Grades and Standards for Nursery Plants" of the state of Florida, Department of Agriculture.
2. All trees, shrubs and groundcovers shall be of the sizes as specified in the Plant List.
3. Quantities listed on the the Plant List are for estimating purposes. Contractor shall verify all quantities. Mulch, topsoil, fertilizer, etc. shall be included in the unit cost of the plans.
4. Where there is a discrepancy either in quantities, plant names, sizes or specifications between the plan or plant list, the plan takes precedence.
5. All planting beds and water basins for trees shall be covered with a 3" minimum depth of shredded eucalyptus or flormulch grade 'B' or better.
6. The Planting Plan shall be installed in compliance with all existing codes and applicable deed restrictions.
7. SOD: All areas not used for buildings, vehicular use areas, walks or planting beds shall be grassed. Grassing shall extend to any abutting street pavement edge and to the mean waterline of any abutting canal, lake or waterway.
8. PLANTING SOIL: All trees and shrubs shall be planted with a minimum of 12" topsoil around and beneath the rootball. Minimum topsoil shall be 6" for groundcover areas and 2" for sodded grass areas.
9. Planting soil to be a weed-free mixture of 70% sand and 30% organics. All plant material to receive planting soil as per details.
10. Contractor is responsible for determining all utility locations and installing facilities so as to not conflict. All damage to existing utilities or improvements caused by Contractor shall be repaired at no additional cost to the Owner.
11. Contractor to notify "Sunshine State One Call of Florida, Inc." at 1-800-432-4770 Two Full Business Days prior to digging for underground utility locations.
12. Contractor shall be responsible for providing final grading of all associated planting areas.
13. After final grade, area to be raked to 6" depth and all rock and foreign inorganic materials removed and disposed of properly off-site.
14. All planting holes to be hand dug except where machine dug holes will not adversely affect or damage utilities or improvements (see note 8).
15. No plunging of any tree or palm will be accepted. All plants to be planted at the nursery grade or slightly higher.
16. Contractor shall stake & guy all trees and palms at time of planting as per the appropriate detail. Contractor is responsible for the maintenance and/or repair of all staking and guying during warranty period and removal & disposal of staking after at least a 9 month establishment period.
17. Fertilizer for grass areas shall be NPK 16-4-8 @ 12.5 lbs/1000 s.f. or 545 lbs/acre. Nitrogen 50% slow release form & fertilizer to include secondary micronutrients.
18. SUBSTITUTIONS AND CHANGES: All substitutions and changes shall be approved in writing prior to installation. Any discrepancies between plans, site and specifications shall be brought to the immediate attention of the Landscape Architect, the owner and governing municipality.

19. WATERING: All plant material shall be watered in at time of planting in accordance with standard nursery practices. In addition, Contractor will continue watering of plant material until substantial completion and as needed thereafter for a period of 2 months.
20. All new plant material shall be guaranteed for 1 year from time of final acceptance of project. Any plant material not in a healthy growing condition will be replaced by the Contractor at no additional cost to the Owner within 10 days of notification. For all replacement plant material, the warranty period shall be extended an additional 45 days beyond the original warranty period. All trees that lean or are blown over, caused by winds less than 75 mph, will be re-set and braced by the Contractor at no additional cost to the Owner.
21. The successful bidder shall furnish to the Owner a unit price breakdown for all materials. The Owner may, at its discretion, add or delete from the materials utilizing the unit price breakdown submitted.
22. No plant material will be accepted showing evidence of cable, chain marks, equipment scars, or otherwise damaged.
23. Plant material will not be accepted when the ball of earth surrounding its roots has been cracked, broken or otherwise damaged.
24. Root-prune all trees a minimum of (8) weeks prior to planting.
25. All landscaped areas will be irrigated by an underground, automatic, rust-free irrigation system providing 100% coverage and 50% spray overlap with the lowest quality available water source. The system shall be maintained in good working order and designed to minimize water on impervious services and not overspray walkways. A rain sensor device shall be installed to override the irrigation cycle of the system when adequate rainfall has occurred.
26. All plant material planted within the sight distance triangle areas (see plan) shall provide unobstructed cross-visibility at a horizontal level between 30 inches and 8 feet above adjacent street grade.
27. No canopy trees shall be planted within 15 feet of a light pole. No palm species shall be planted within 6 feet of a light pole.
28. Ground cover plantings shall provide not less than 50 percent coverage immediately upon planting and 100 percent coverage within 6 months after planting.
29. Tree protection barricades shall be provided by Landscape Contractor around existing trees that may be impacted by the proposed construction. Prior to any construction a tree protection barricade inspection shall be conducted by the landscape architect, owner or governing municipality. Refer to landscape detail for tree preservation barricade fencing.
30. In all pedestrian areas, all trees and palms shall be maintained to allow for clear passage at an 8 foot clear trunk.
31. All landscape material shall be setback a minimum of 5' from any Fire Hydrant.
32. The contractor shall ensure adequate vertical drainage in all plant beds and planters. If inadequate vertical drainage is encountered, the contractor shall submit recommendations for providing adequate drainage to the owner's representative.
33. Root balls of all containerized plant material shall be shaved prior to planting to remove any circling roots.

