



SECTION A-A

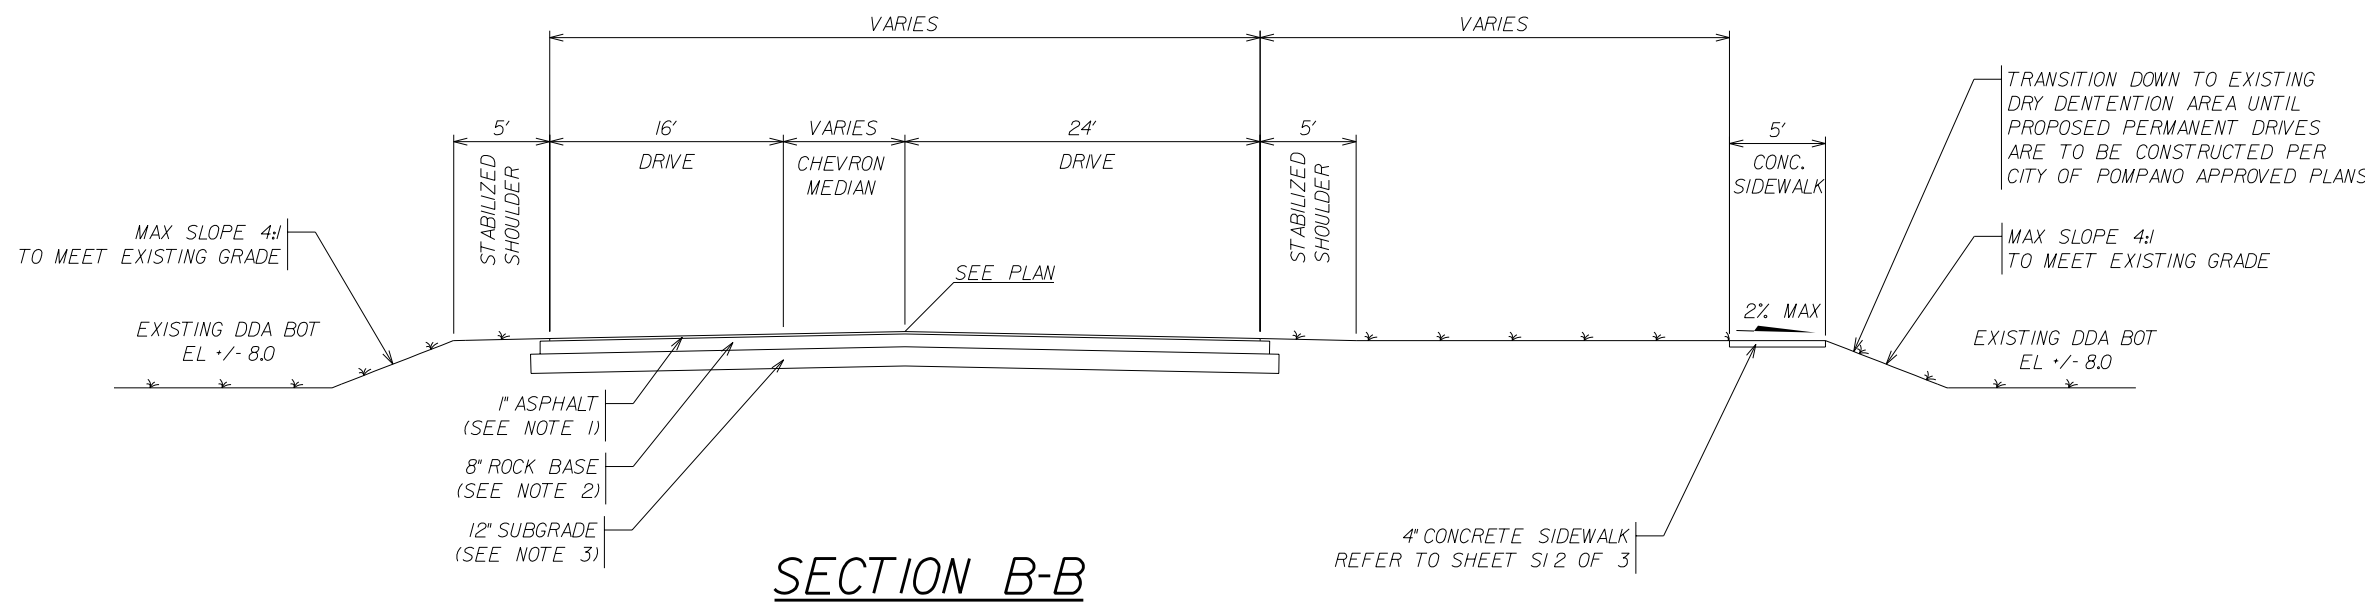


SECTION B-B

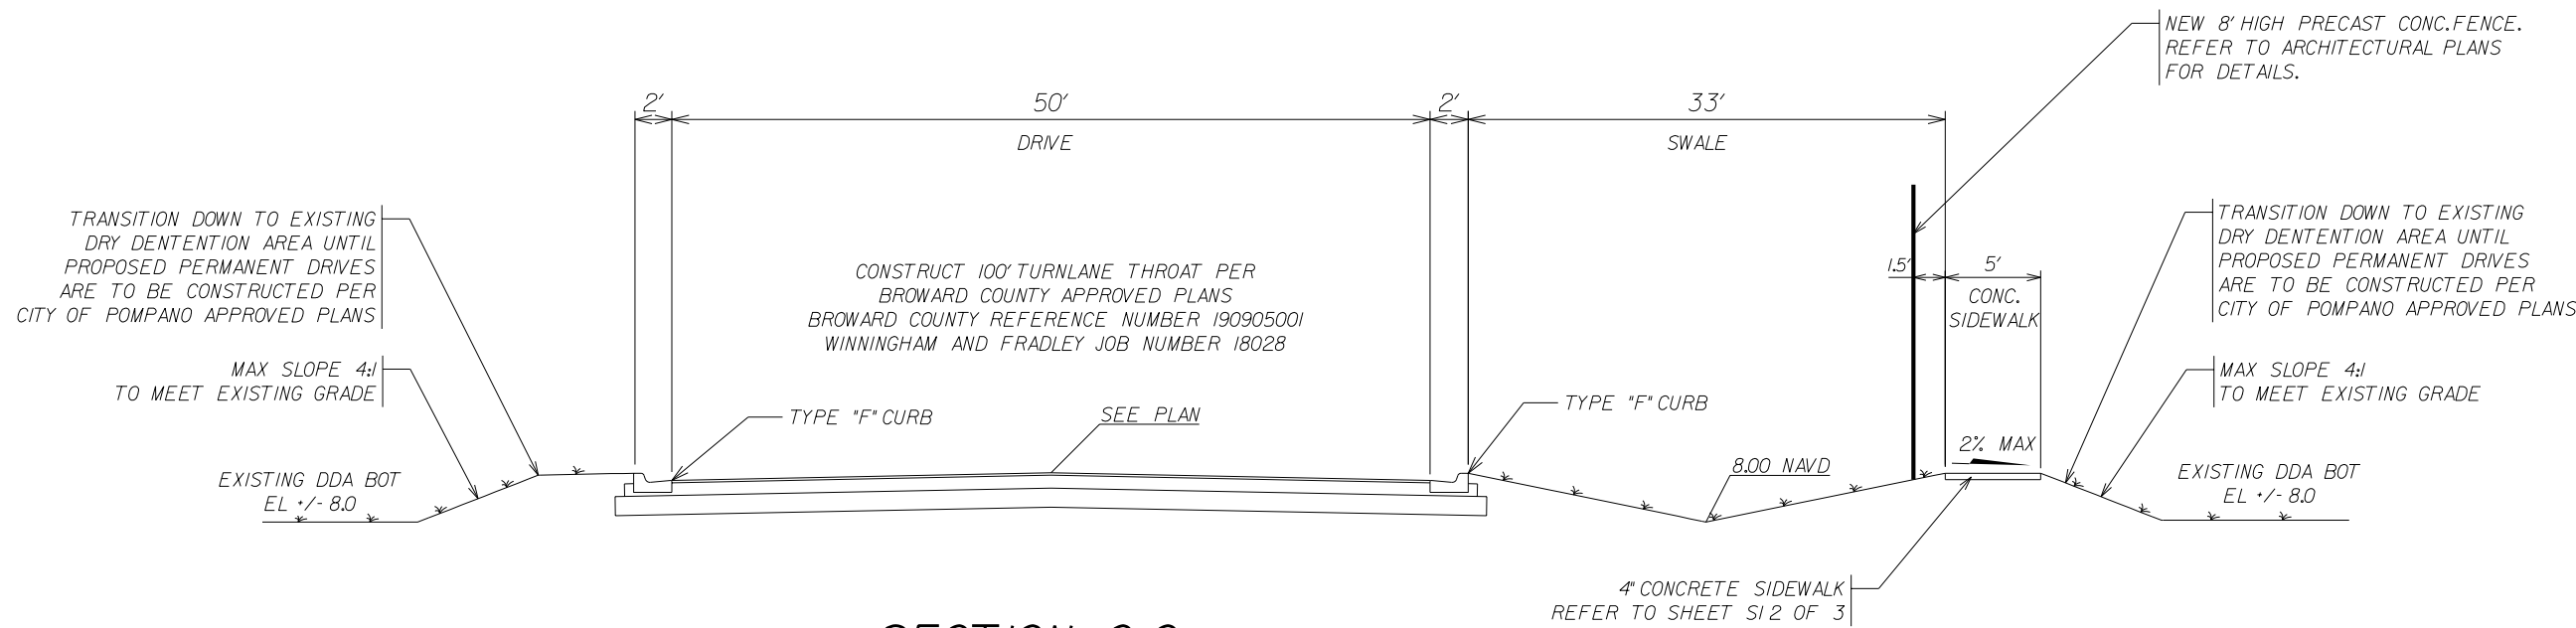


SECTION C-C

NOTES:

- PAVEMENT SHALL BE 1\"/>
- 8\"/>
- SUBGRADE MATERIAL SHALL BE IN ACCORDANCE WITH SECTION 160 OF THE F.D.O.T. STANDARD SPECIFICATIONS. ALL SUBGRADE SHALL HAVE A MINIMUM L.B.R. OF 40 AND SHALL BE COMPACTED TO NOT LESS THAN 100% MAXIMUM DRY DENSITY AS DETERMINED BY AASHTO T-99C.
- BASE AND SUBGRADE DENSITY TESTS SHALL BE CONDUCTED FOR A MAXIMUM 7000 SQUARE FEET OF FINISHED PAVEMENT OR @ 300' INTERVALS MAX.
- PRIME COAT SHALL BE APPLIED AT A RATE OF 0.25 GALLONS PER SQUARE YARD. PRIME AND TACK COAT FOR BASE SHALL CONFORM TO THE REQUIREMENTS AND SPECIFICATIONS OF SECTION 300.1 THROUGH 300.7 OF F.D.O.T. STANDARD SPECIFICATION.
- PROCTOR SHALL BE PERFORMED ON ALL MATERIAL SUBGRADE AND BASE AND SUBSEQUENT CHANGES IN MATERIAL. LIMEROCK BEARING RATIOS, SIEVE ANALYSIS AND DENSITIES REQUIRED BY THE CONTRACT DOCUMENTS SHALL BE SUBMITTED TO BROWARD COUNTY AND THE CITY OF POMPANO.
- ALL REPAIRS TO EXISTING PAVEMENT SHALL RECEIVE SAW-CUT EDGES PRIOR TO RELAYING ASPHALT.
- MINIMUM LONGITUDINAL SLOPE OF PAVEMENT SHALL BE 0.30%.
- DEMUCKING (IF ANY) SHALL BE IN ACCORDANCE WITH BROWARD COUNTY MINIMUM STANDARDS OR AS DIRECTED BY GEOTECHNICAL ENGINEER.
- EMBANKMENT MATERIAL (MINIMUM L.B.R. 40) COMPACTED IN 8\"/>

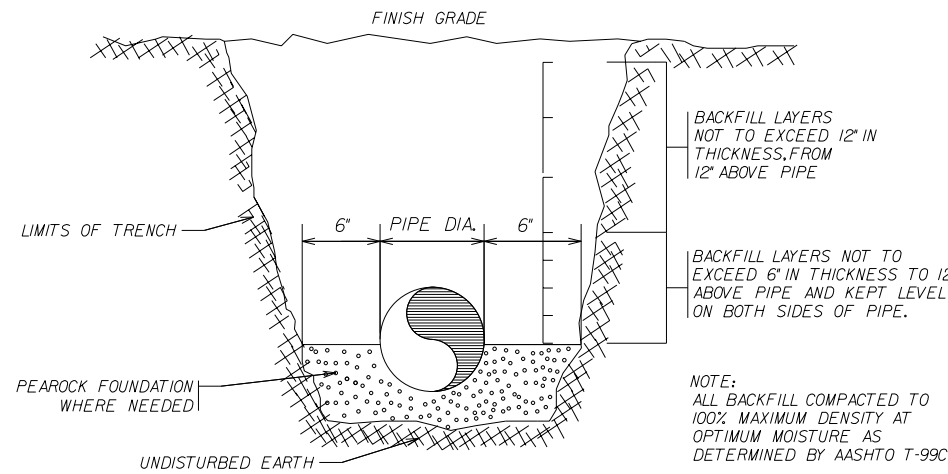


PIPE BEDDING DETAIL

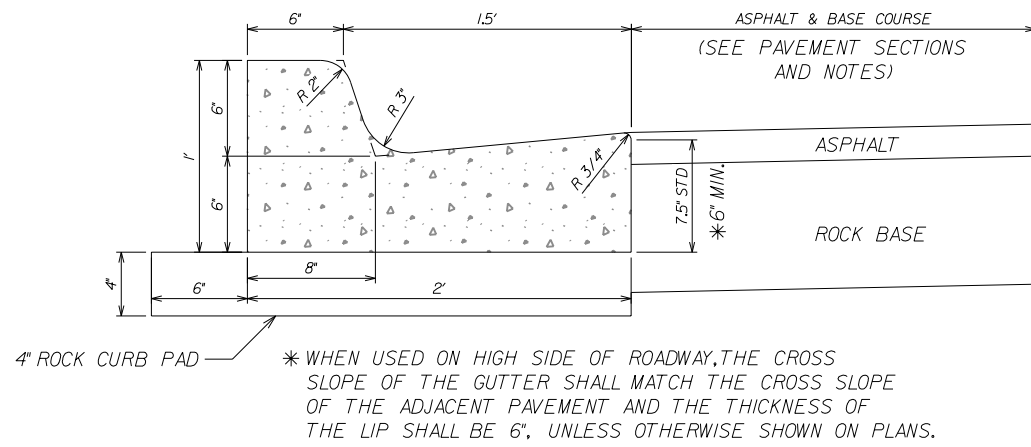

TYPE 'F' CURB & GUTTER

NOTE:  
CONCRETE SHALL BE 3000 psi AT 28 DAYS

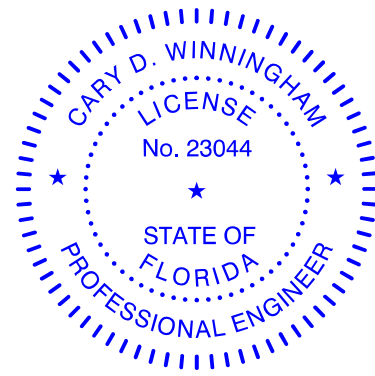

This item has been electronically signed and sealed with a Digital Signature by:  
Cary D Winningham  
2023.06.01 12:34:41 -04'00'  
Printed copies of this document are not considered signed and sealed and must be verified on any electronic copies.

SITE IMPROVEMENTS  
SECTIONS & DETAILS

BONSAL POMPANO  
OLDCASTLE COASTAL

WINNINGHAM & FRADLEY, INC.  
ENGINEERS & PLANNERS & SURVEYORS  
111 N.E. 44th STREET, OPA LOCKA, FL 33457-2440  
P: 561-244-1111 F: 561-244-1112 WWW.WF-INC.COM

DESIGNED: CJD/GSB DATE: 08/20/2023  
DRAWN: AMF DATE: 08/20/2023  
CHECKED: WTV DATE: 12/20/2023  
PROJECT NUMBER: 18-038 SHEET: 3

PZ23-12000032  
10/04/2023