
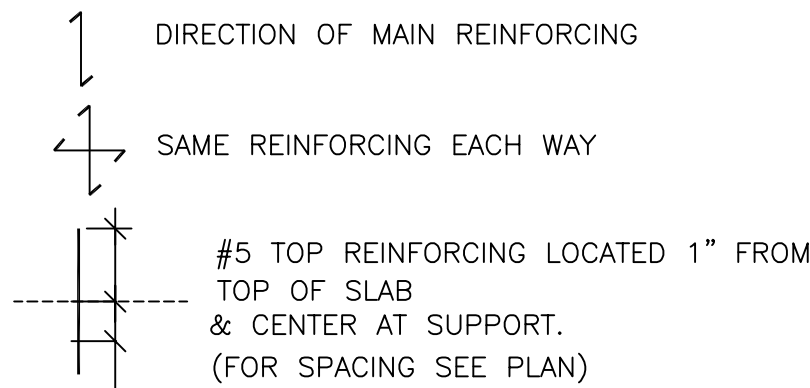


SCHEDULE OF SLAB & REINFORCING			
MARK	THICKNESS	MAIN REINFORCING	CENTER OF BAR FROM BOTTOM OF SLAB
	6"	#5 12" O.C. E.W.	1 1/2"


NOTE: ALL SLAB HAVE #3 TEMP. REINFORCING PERPENDICULAR TO MAIN REINFORCING @ 12" O.C.
EXTEND BOTTOM BARS 6" INTO ADJACENT SUPPORTS

TYPICAL CONCRETE COVERAGE
BEAMS & COLUMNS 1 1/2" EXCEPT SHOWN OTHERWISE
FOUNDATION 3" EXCEPT SHOWN OTHERWISE
SLAB 3/4" EXCEPT SHOWN OTHERWISE

LEGEND



ROOF NOTE:
DIFFERENCE IN LEVEL BETWEEN ROOF DRAIN & EDGE OF ROOF FOR FREE EVACUATION OF WATER IS 6" MAX.
EXCESS OF WATER OVER PERMITTED 5" HAS BEEN CONSIDERED IN THE DESIGN OF THE ROOF STRUCTURE

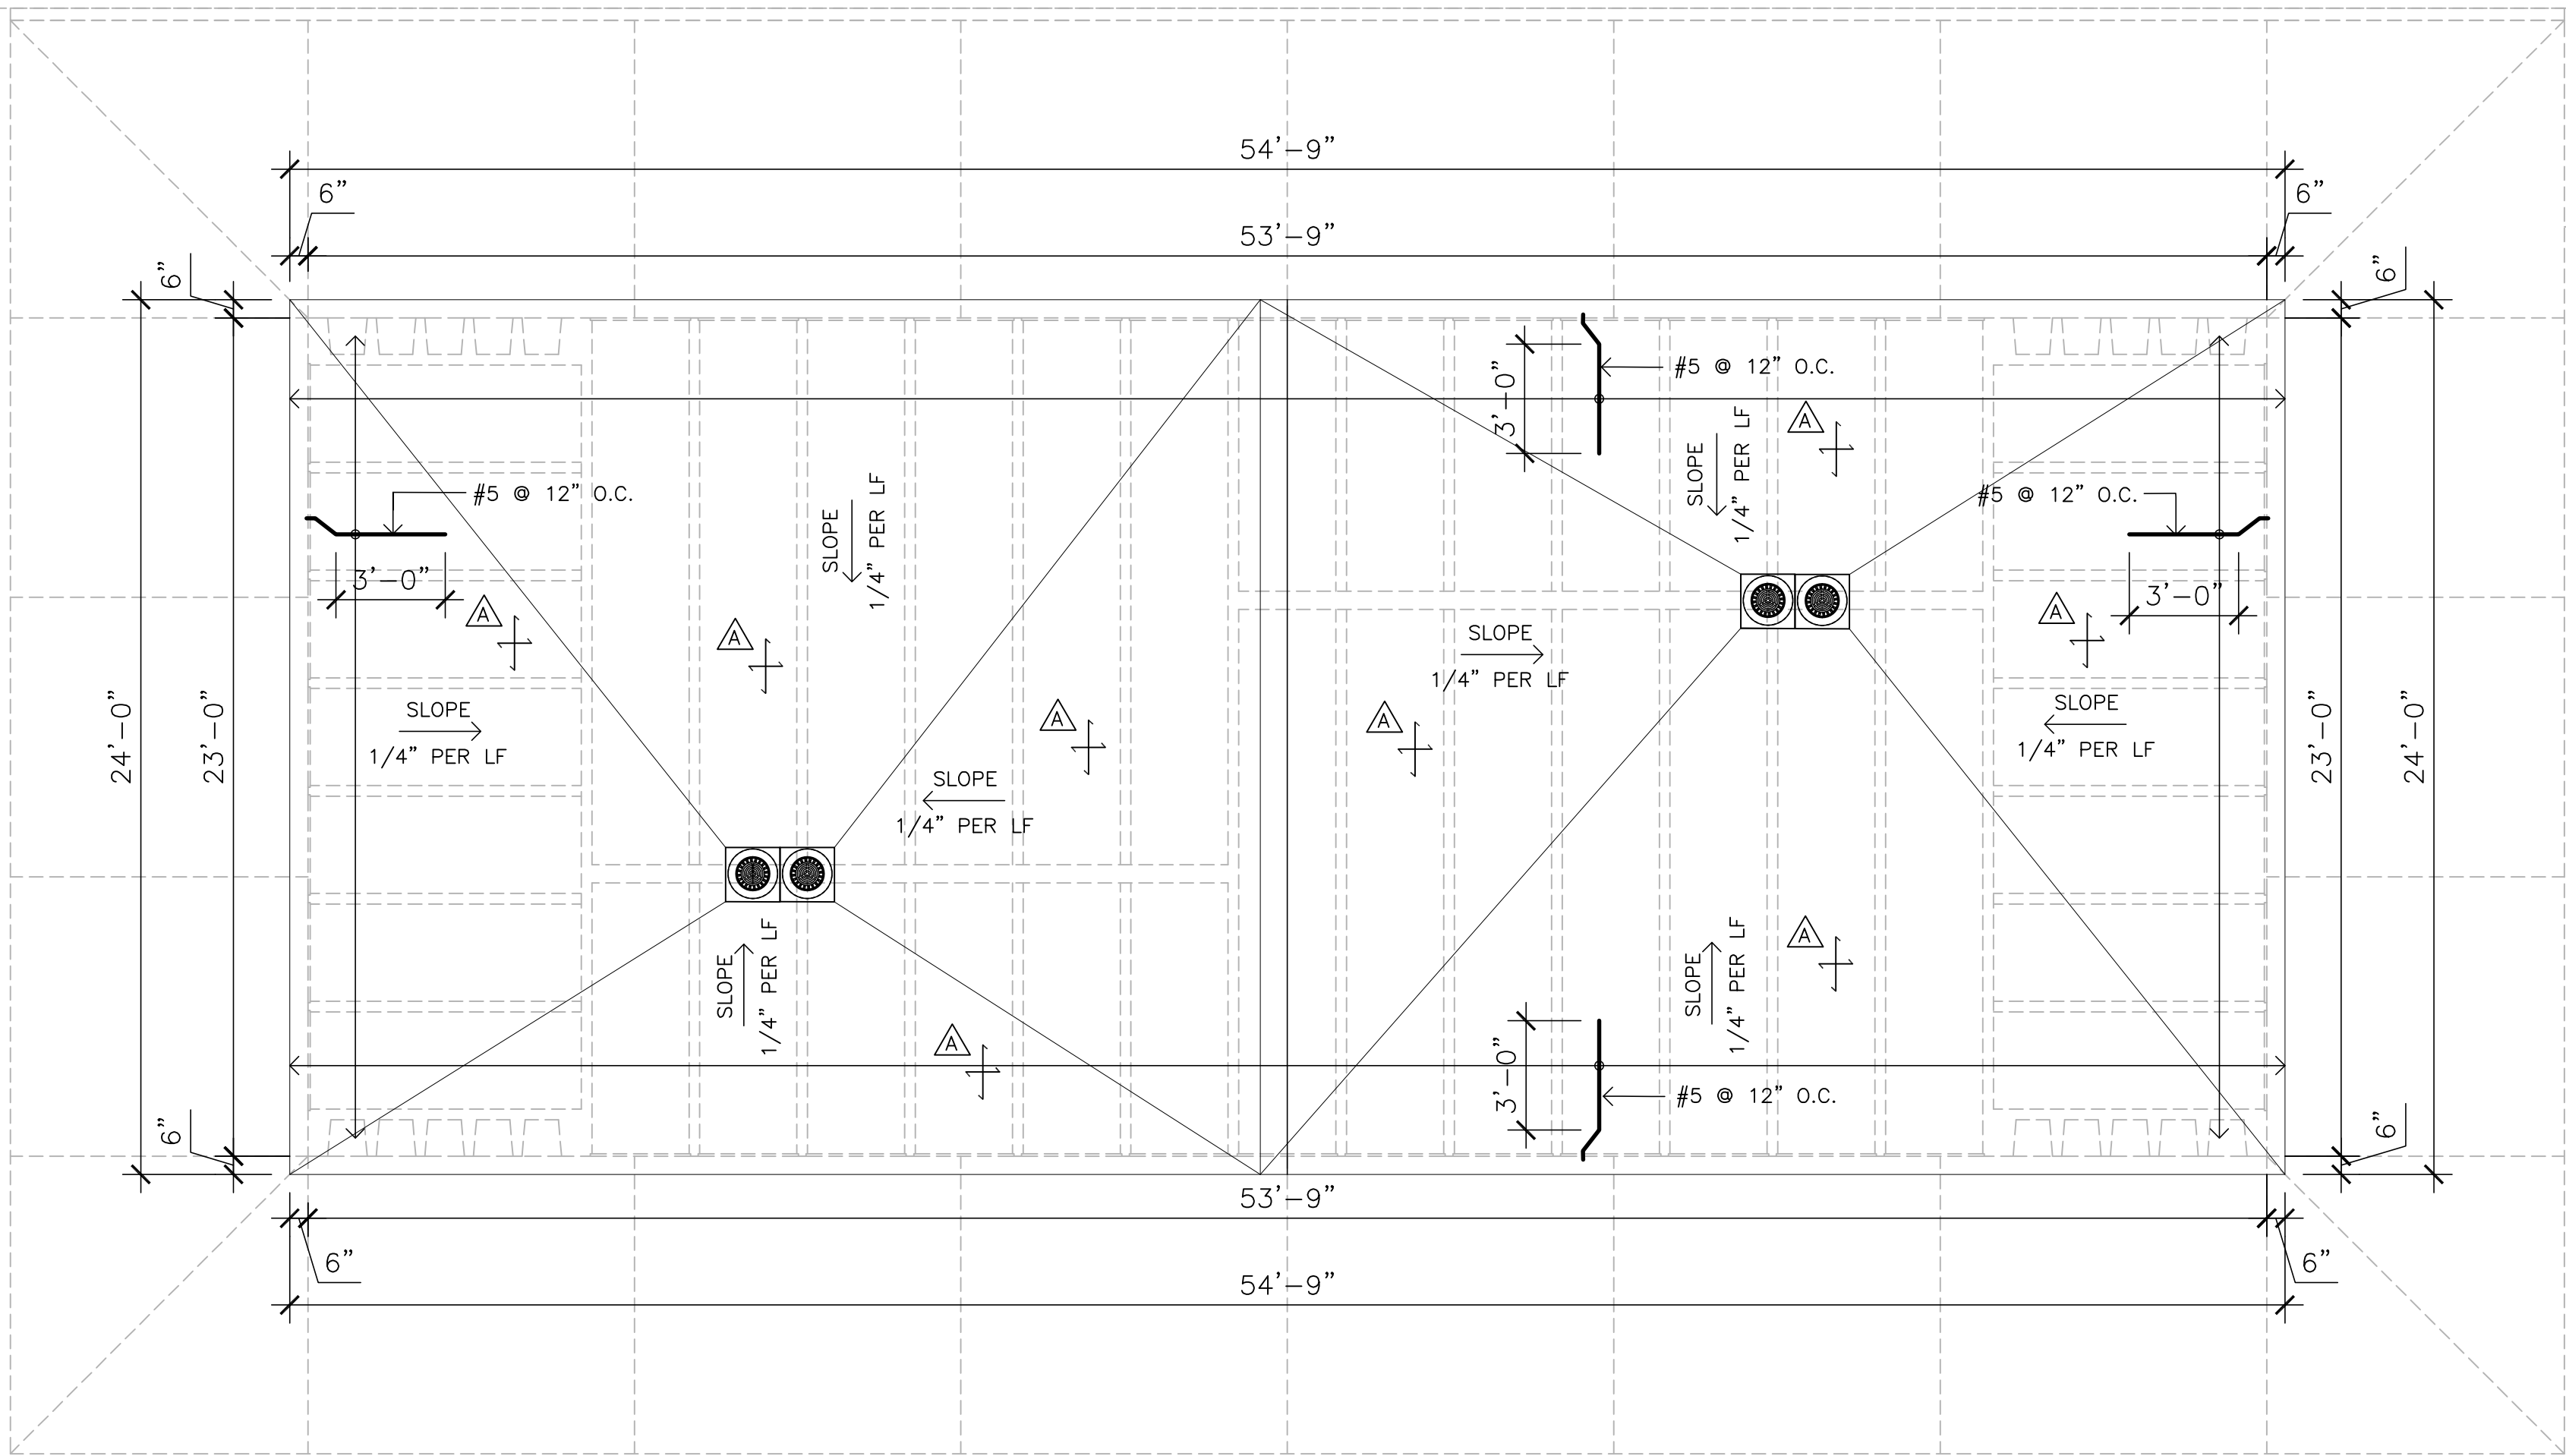

ROOF FRAMING PLAN

BUILDING 12


SCALE: 1/4"=1'-0"



Revisions:

Date: 02-18-25

Comm. No. 2405



ARPER Engineering
811 NW 43rd Avenue Suite 301
Miami Florida 33126
(305) 741-4466
www.arper.us
Alejandro Ramirez, PE 52742

This item has been digitally signed and sealed by Alejandro Ramirez, PE on: see seal date Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.