


1 GROUND FLOOR PHOTOMETRICS  
Scale: 3/32" = 1'-0"

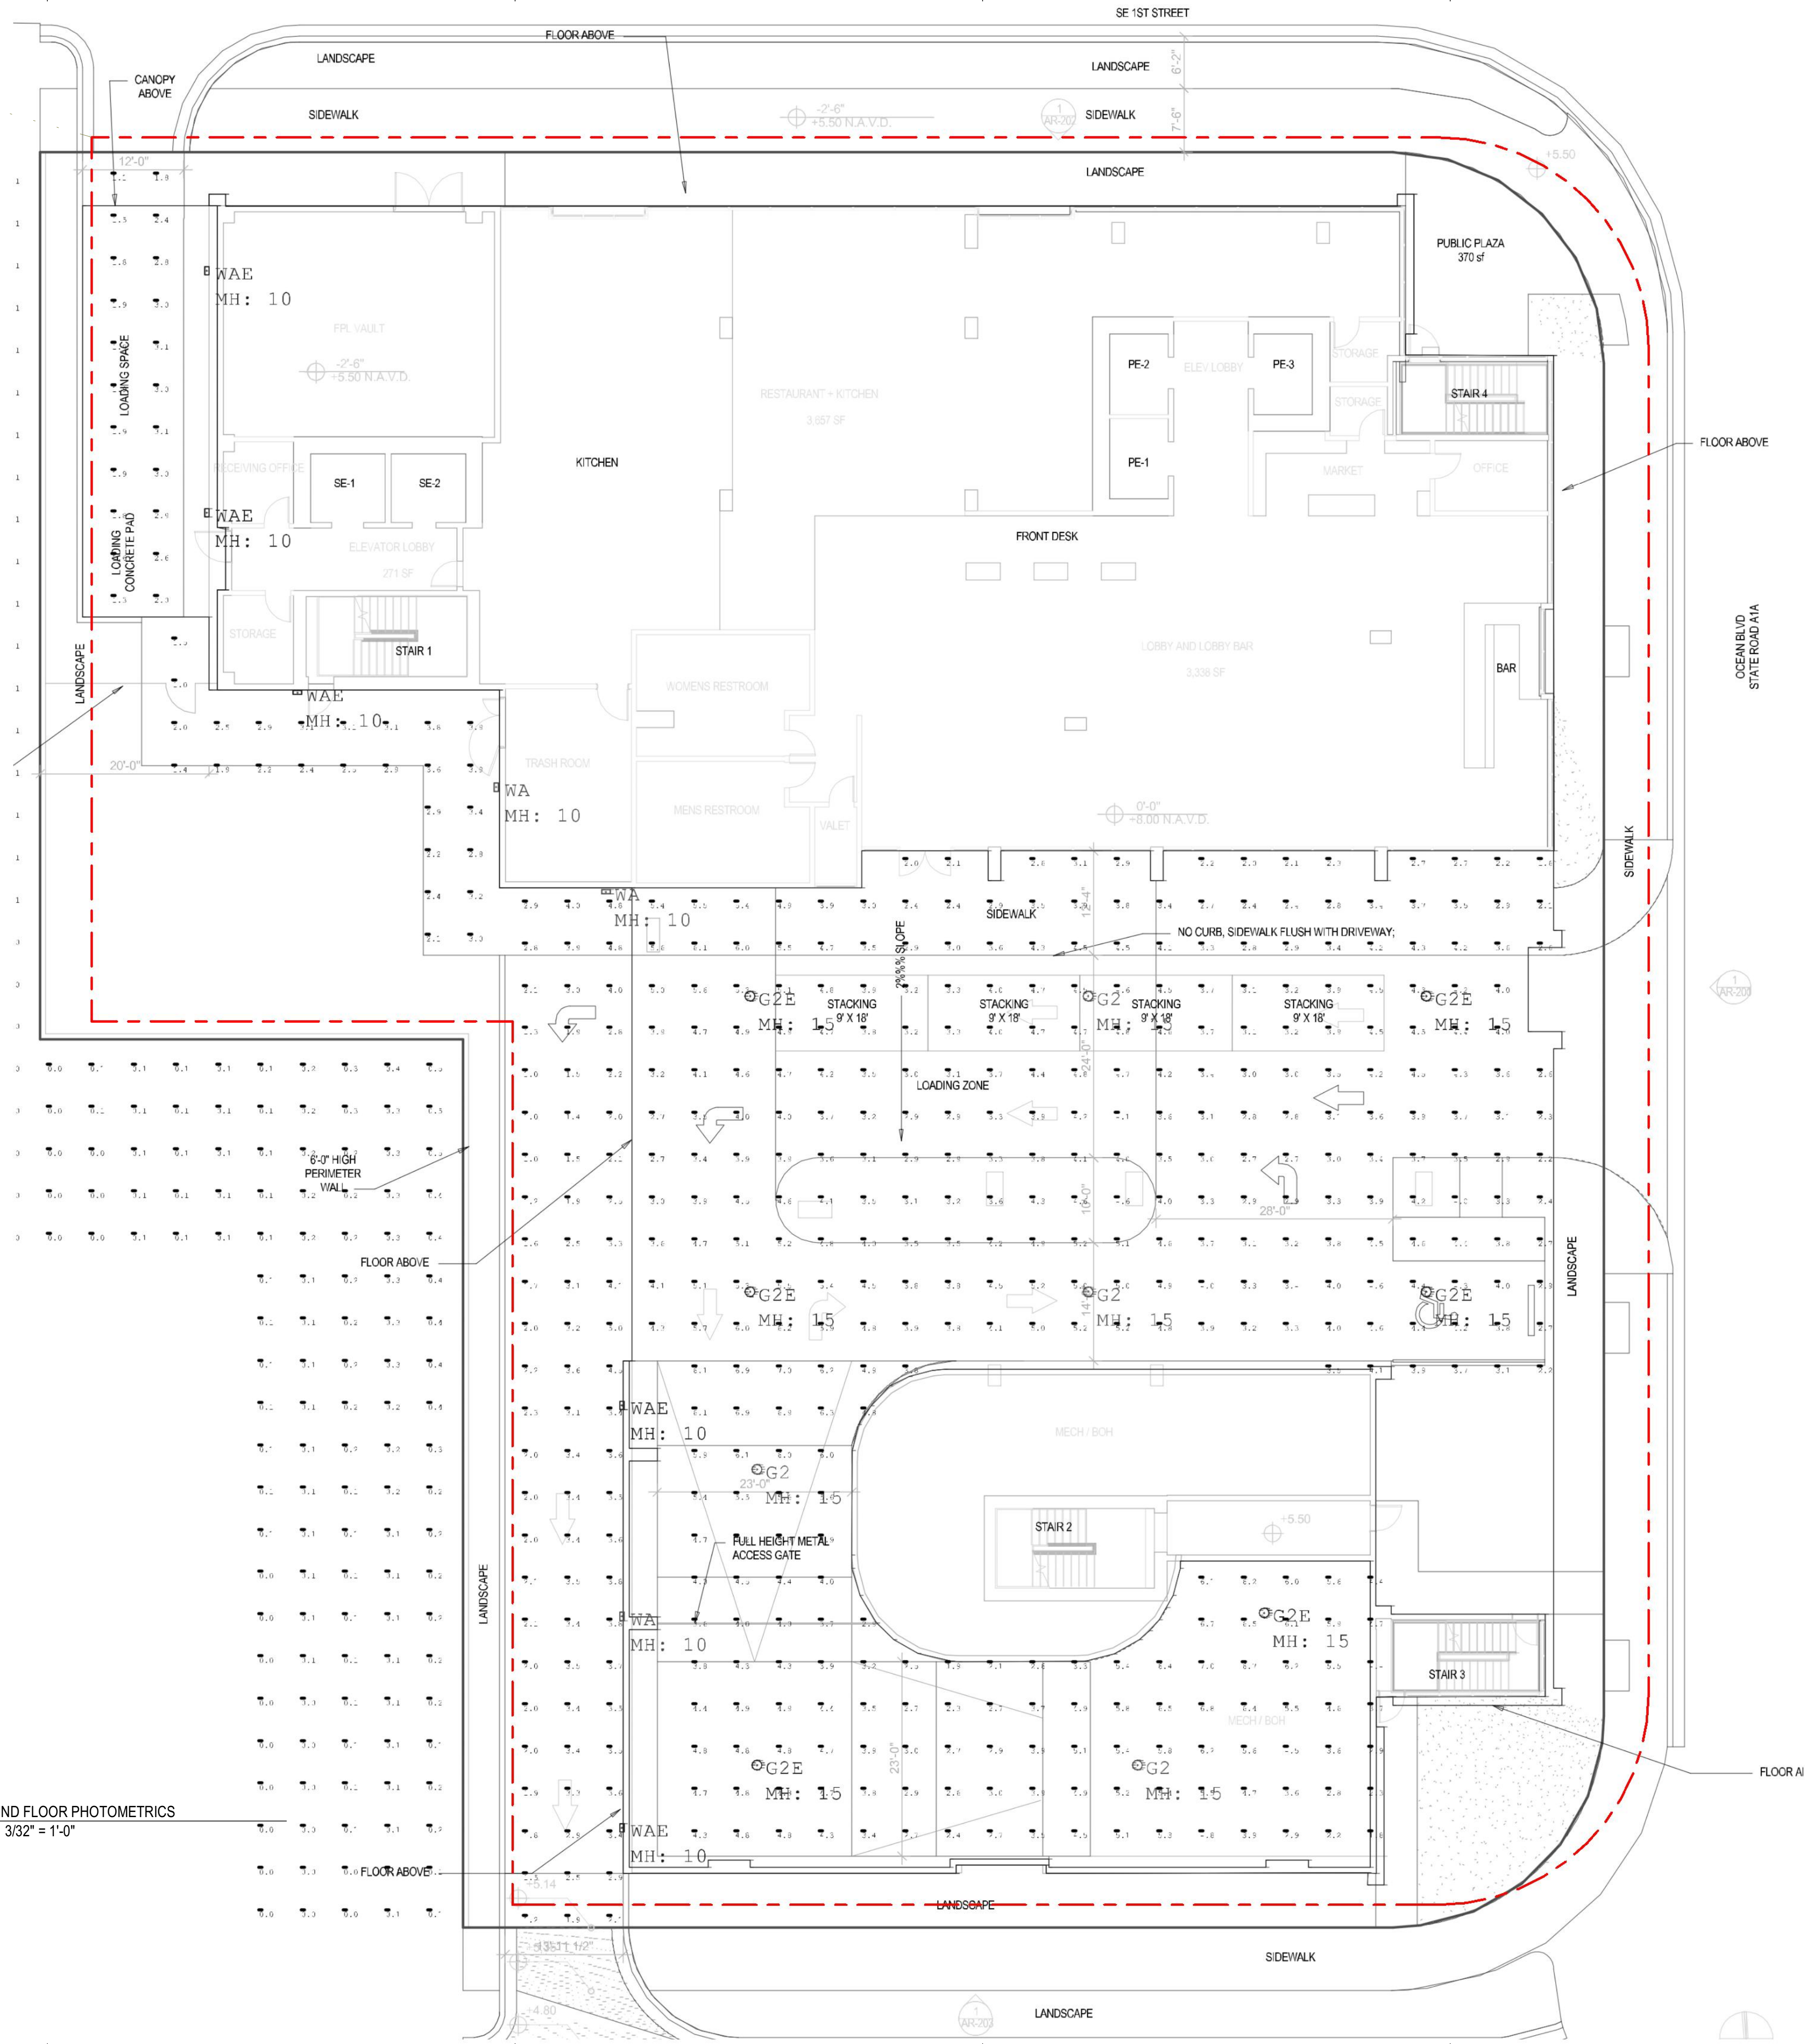

Luminaire Schedule		Qty	Label	Arrangement	Description	LLF	Luminaire		Total
Symbol	Watts						Lumens	Watts	
□	5	5	WAE	Single	ISI Industries XWS-LED-021-SIL-2-UNV-DIM-40-70CRI-XX (Connected to Generator)	0.900	1974	13	65
□	3	3	WA	Single	ISI Industries XWS-LED-021-SIL-2-UNV-DIM-40-70CRI-XX	0.900	1974	13	39
○	6	6	G2E	Single	ISI Industries EXN-D-EGIED-061-T5H-UNV-DIM-40-80CRI-XX (Generator)	0.900	6380	44	264
○	4	4	G2	Single	ISI Industries EXN-D-EGIED-061-T5H-UNV-DIM-40-80CRI-XX	0.900	6380	44	176

Calculation Summary			
Label	CalcType	Units	Max/Min
Loading Dock	Illuminance	Fc	2.00 2.82
Park and Drive Lanes	Illuminance	Fc	3.87 7.00
Sidewalk	Illuminance	Fc	2.68 3.90
Spill	Illuminance	Fc	0.07 N.A.


DESIGNED	DRAWN	CHECKED
NH	NH	JY

REVISIONS

DATE: 9.27.2023  
COMM: 23008

POMPAÑO HOTEL

101 S. OCEAN BLVD  
POMPAÑO BEACH, FL 33062



Digitally signed  
by Jiro Yates  
Date: 2023.09.27  
09:50:40-04'00'

**DRC**  
PZ23-12000042  
11/01/2023