




WEST ELEVATION ①
SCALE: 1/8" = 1'-0"

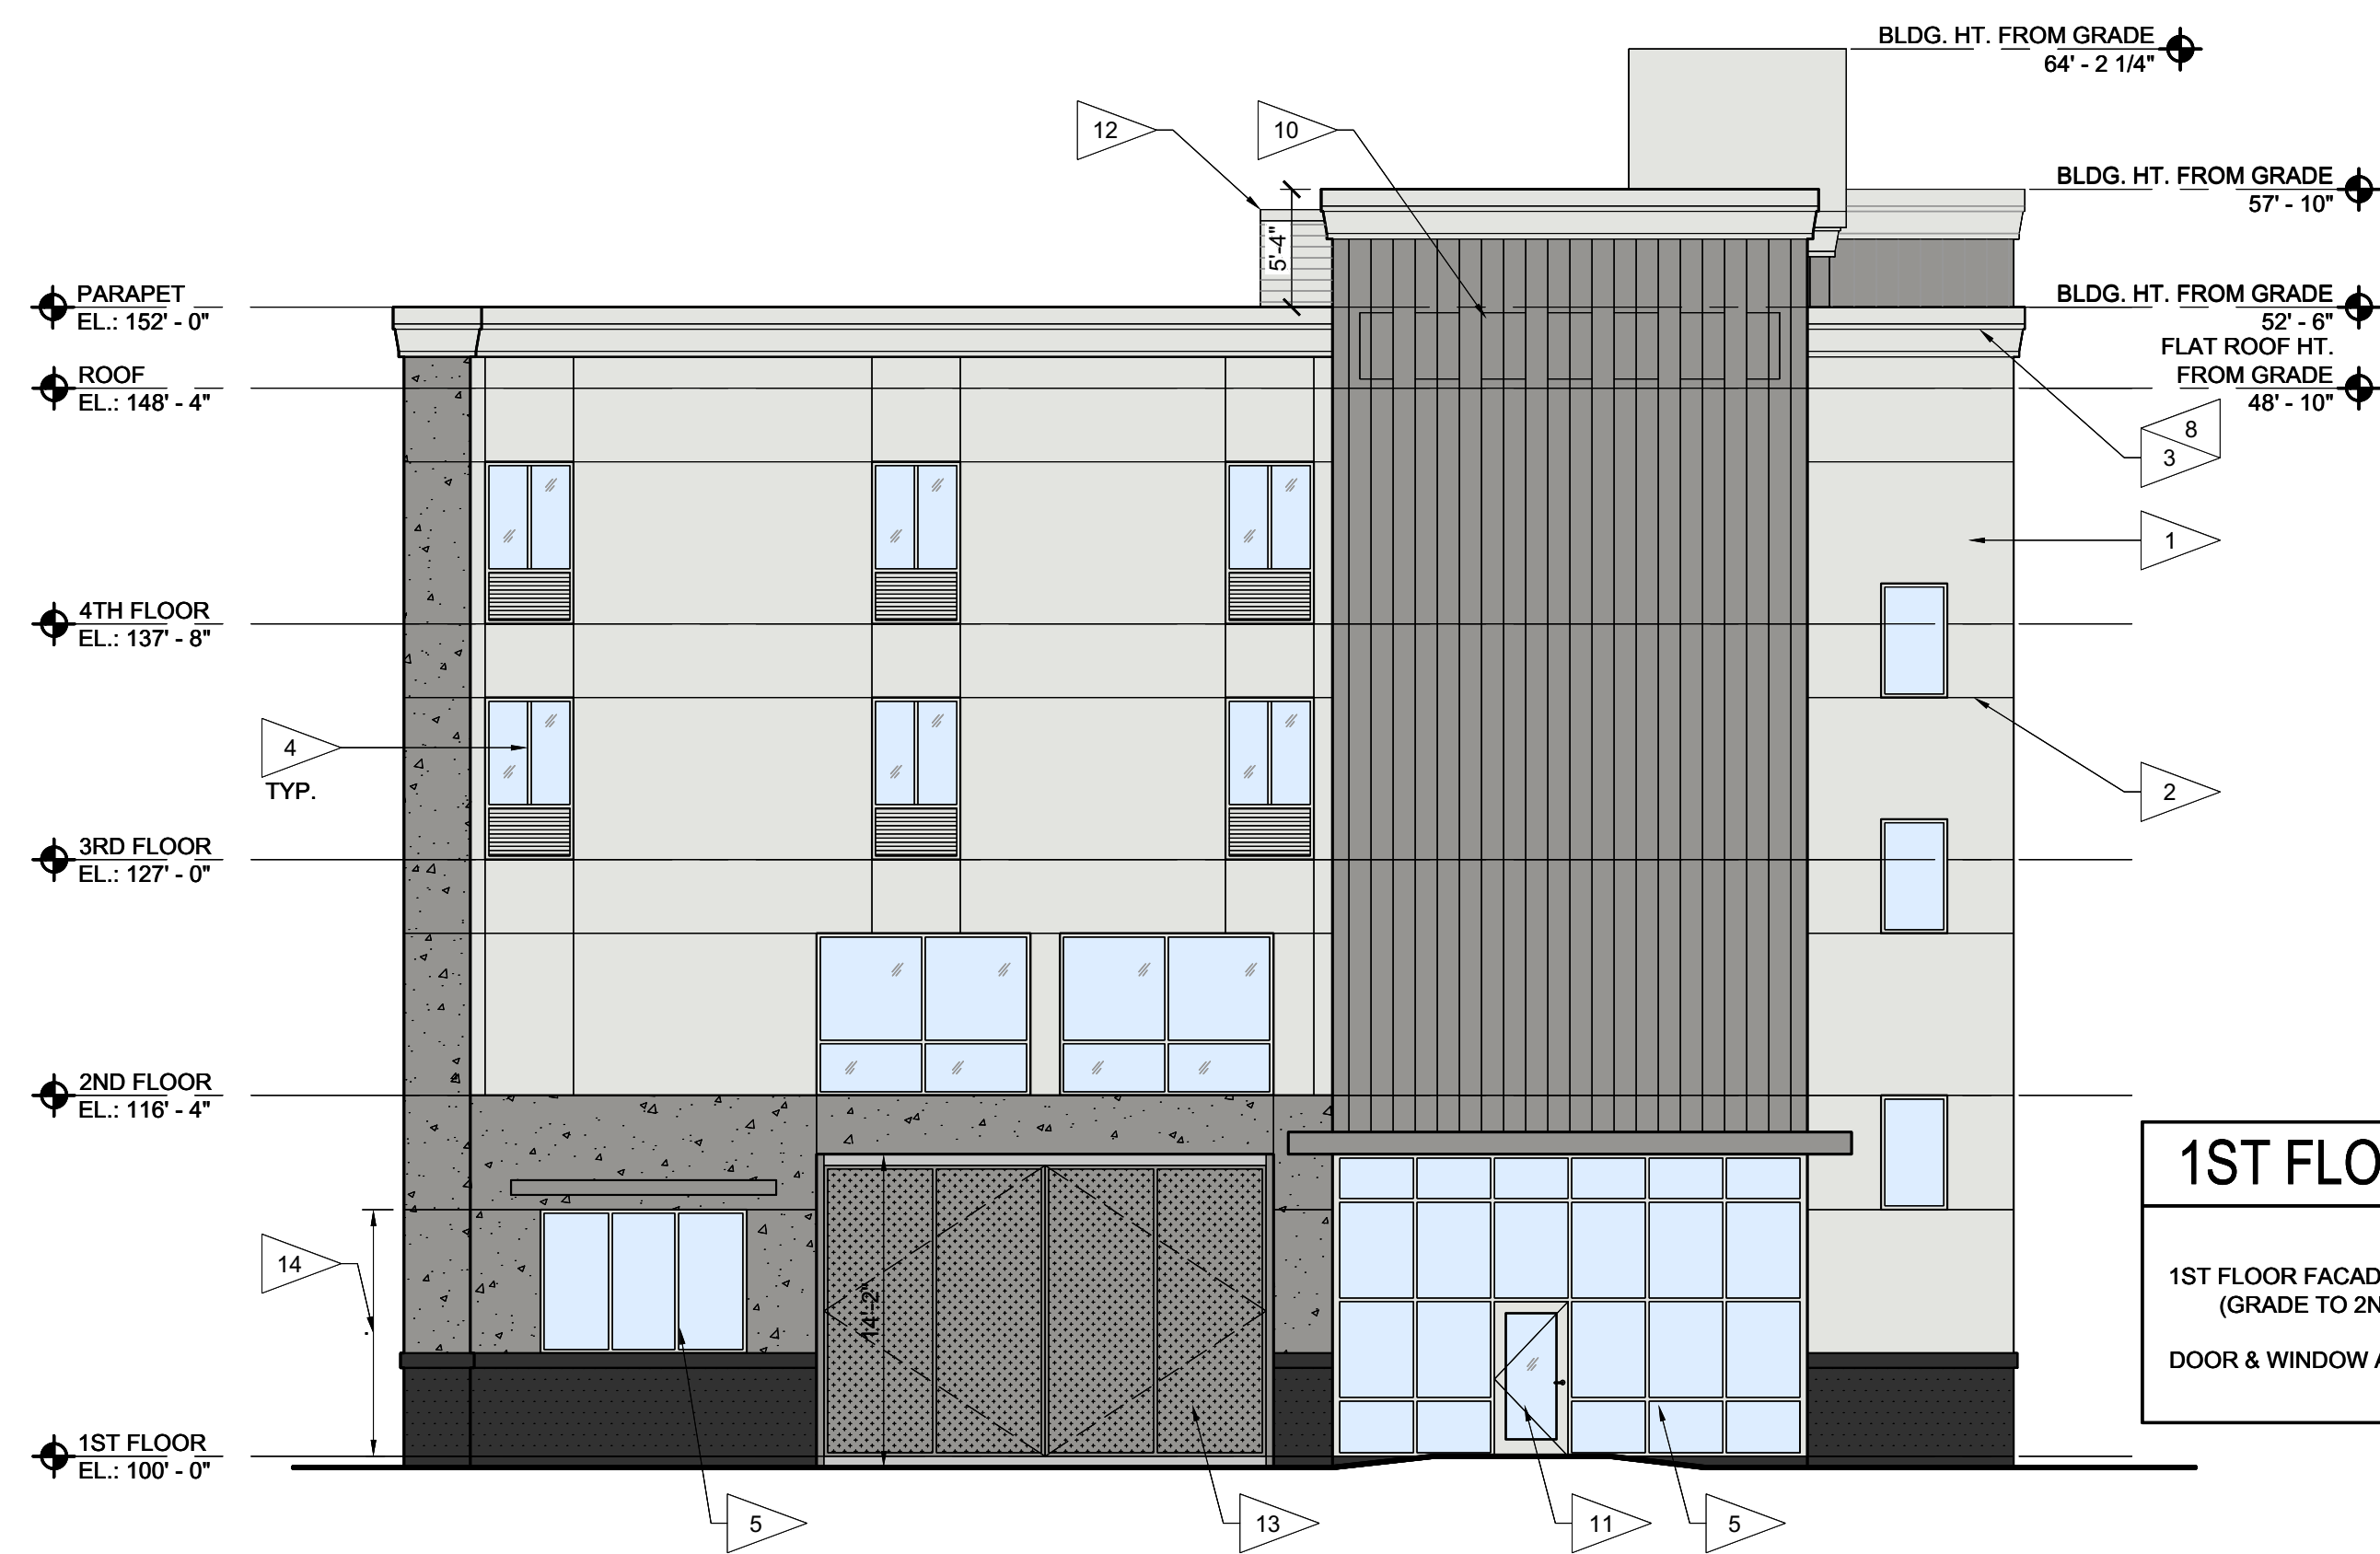

NORTH ELEVATION ②
SCALE: 1/8" = 1'-0"

1ST FLOOR FENESTRATION:			
1ST FLOOR FACADE AREA (GRADE TO 2ND FLR LINE)	TOTAL	AREA 1226 SF	PERCENT 100%
DOOR & WINDOW AREA	REQUIRED	368 SF	30%
		368 SF	30%

GENERAL NOTES:	KEY NOTES: XX
1. REFER TO CANDLEWOOD SUITES STANDARDS MANUAL GUIDE FOR ADDITIONAL INFORMATION REGARDING EXTERIOR MATERIALS, CONSTRUCTION REQUIREMENTS AND SIGNAGE REQUIREMENTS.	1. CEMENT STUCCO SYSTEM - SEE FINISH LEGEND FOR COLOR.
FINISH LEGEND	2. CONTROL JOINT - LOCATIONS AS SHOWN WITH ADDITIONAL JOINTS IF REQUIRED BY STUCCO SYSTEM.
<div><div></div><div>P1 - CEMENT STUCCO W/ VERTICAL "V" GROOVES AT 12" O.C. SHERWIN WILLIAMS SUMMIT GRAY - SW 7669</div></div> <div><div></div><div>P2 - CEMENT STUCCO SHERWIN WILLIAMS ICE CUBE - SW 6252</div></div> <div><div></div><div>P3 - CEMENT STUCCO SHERWIN WILLIAMS OUTERSPACE - SW 6251</div></div> <div><div></div><div>P4 - CEMENT STUCCO SHERWIN WILLIAMS SUMMIT GRAY - SW 7669</div></div> <div><div></div><div>P5 - CEMENT STUCCO SHERWIN WILLIAMS</div></div>	3. CORNICE BAND - STUCCO PROJECTION. SEE FINISH LEGEND FOR COLOR.
	4. INTEGRATED EXTERIOR WINDOW AND PTAC LOUVER - CLEAR ANODIZED COLOR. SEE WINDOW SCHEDULE.
	5. ALUMINUM STOREFRONT - CLEAR ANODIZED COLOR. SEE WINDOW SCHEDULE.
	6. ALUMINUM STOREFRONT (NO GLASS) - CLEAR ANODIZED COLOR.
	7. AUTOMATIC ALUMINUM SLIDING DOOR - SEE SCHEDULE. CLEAR ANODIZED COLOR.
	8. METAL COPING SYSTEM - MATCH ADJACENT WALL COLOR.
	9. ENTRY CANOPY - SEE FINISH LEGEND FOR COLOR.
	10. SIGNAGE - COORDINATE COLORS AND DESIGN WITH HOTEL BRAND STANDARDS.
	11. ALUMINUM STOREFRONT DOOR - CLEAR ANODIZED COLOR.
	12. EQUIPMENT SCREENING PANELS & ACCESS GATE W/ ANCHORAGE & BRACING AS REQUIRED TO WITHSTAND 150 MPH WIND LOAD. COORDINATE MINIMUM HEIGHT W/ EQUIPMENT.
	13. FIRE DEPT. ACCESS GATE - PERFORATED STAINLESS STEEL PANELS WITH STAINLESS STEEL FRAMES.
	14. ANTI-GRAFFITI SEALANT - PROVIDE ANTI-GRAFFITI COATING ON ALL CEMENT STUCCO FROM BOTTOM TO 1ST CONTROL JOINT (MIN. 10'-0")

JOB NUMBER
22031

ISSUE DATE
05-13-24

REVISIONS

CDG II, L.L.C. © 2024

STATE OF FLORIDA

CHRISTOPHER H. BENNETT

ARCHITECT

AR97607

2/28/2025

CHRISTOPHER HOWARD BENNETT
ARCHITECT AR97607
EXP: 2/28/2025

CONDO HOTEL

872 E MCNAB ROAD POMPANO BEACH, FLORIDA 33060

ARCHITECTURE | PLANNING | INTERIOR DESIGN | PROCUREMENT

CENTRAL DESIGN GROUP II • 3200 PENN TERRACE, SUITE 100 • COLUMBIA, MISSOURI, 65202 • TEL: 573.441.9391

centraldesign
group II

EXTERIOR
ELEVATIONS
COLOR

DRC

PZ23-12000045

07/03/2024