

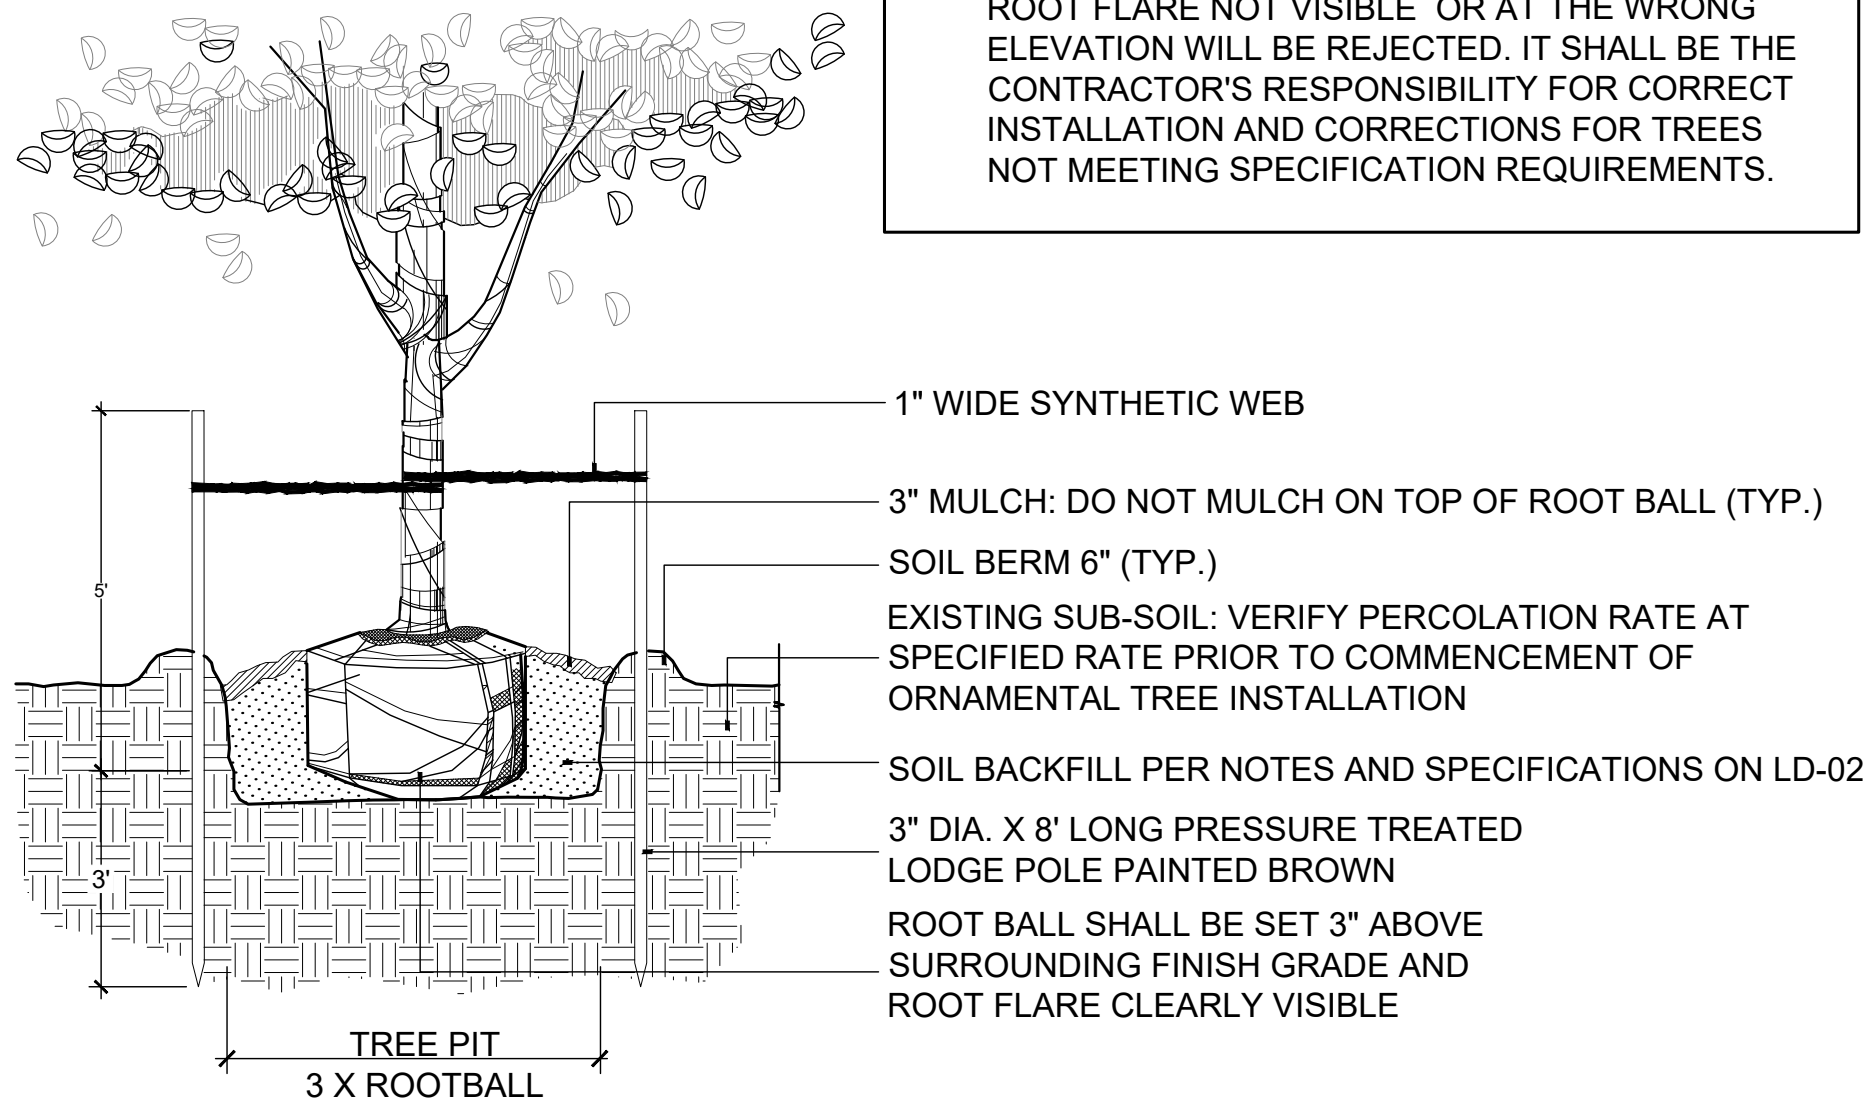


- INSTALLATION NOTES:**
- ALL PLANTING AREAS AND PLANTING PITS SHALL BE TESTED FOR SUFFICIENT PERCOLATION (AT A RATE OF 1" OF STANDING WATER IN 10 MINUTES) PRIOR TO INSTALLATION OF PLANT MATERIAL TO ENSURE SUFFICIENT DRAINAGE.
 - PLANT BEDS IN PARKING LOTS AND IN AREAS COMPACTED BY EQUIPMENT AND MACHINERY SHALL BE LOOSENED SO THAT THE SPECIFIED DRAINAGE/PERCOLATION RATE IS ACHIEVED.
 - ALL SYNTHETIC BURLAP, STRING, CORDS OR WIRE BASKETS SHALL BE REMOVED BEFORE TREES ARE PLANTED, WITHOUT BREAKING THE SOIL BALL. ALL SYNTHETIC TAPE SHALL BE REMOVED FROM BRANCHES AND TRUNKS PRIOR TO FINAL ACCEPTANCE. THE TOP 1/3 OF NATURAL BURLAP SHALL BE REMOVED, AFTER THE TREE IS SET IN THE PLANTING HOLE AND BEFORE THE TREES ARE BACKFILLED.
 - ROOTBALL SHALL BE INSTALLED 3" ABOVE SURROUNDING FINISH GRADE WITH ROOT FLARE CLEARLY VISIBLE AND ABOVE SURROUNDING FINISH GRADE. TREES/ PALMS PLANTED TOO DEEP OR ROOT FLARE NOT VISIBLE OR AT THE WRONG ELEVATION WILL BE REJECTED. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY FOR CORRECT INSTALLATION AND CORRECTIONS FOR TREES/ PALMS NOT MEETING SPECIFICATION REQUIREMENTS.

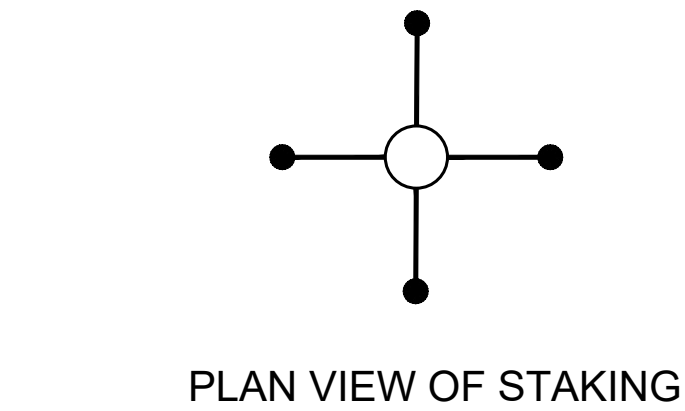

- TREE INSTALLATION NOTES**
- ALL PLANTING AREAS AND PLANTING PITS SHALL BE TESTED FOR SUFFICIENT PERCOLATION (AT A RATE OF 1" OF STANDING WATER IN 10 MINUTES) PRIOR TO INSTALLATION OF PLANT MATERIAL TO ENSURE SUFFICIENT DRAINAGE.
 - PLANT BEDS COMPACTED BY EQUIPMENT AND MACHINERY SHALL BE LOOSENED SO THAT THE SPECIFIED DRAINAGE/PERCOLATION RATE IS ACHIEVED.
 - ALL SYNTHETIC BURLAP, STRING, CORDS OR WIRE BASKETS SHALL BE REMOVED BEFORE TREES ARE PLANTED, WITHOUT BREAKING THE SOIL BALL. ALL SYNTHETIC TAPE SHALL BE REMOVED FROM BRANCHES AND TRUNKS PRIOR TO FINAL ACCEPTANCE. THE TOP 1/3 OF NATURAL BURLAP SHALL BE REMOVED, AFTER THE TREE IS SET IN THE PLANTING HOLE AND BEFORE THE TREES ARE BACKFILLED.
 - ROOTBALL SHALL BE INSTALLED 3" ABOVE SURROUNDING FINISH GRADE WITH ROOT FLARE CLEARLY VISIBLE AND ABOVE SURROUNDING FINISH GRADE. TREES PLANTED TOO DEEP OR ROOT FLARE NOT VISIBLE OR AT THE WRONG ELEVATION WILL BE REJECTED. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY FOR CORRECT INSTALLATION AND CORRECTIONS FOR TREES NOT MEETING SPECIFICATION REQUIREMENTS.

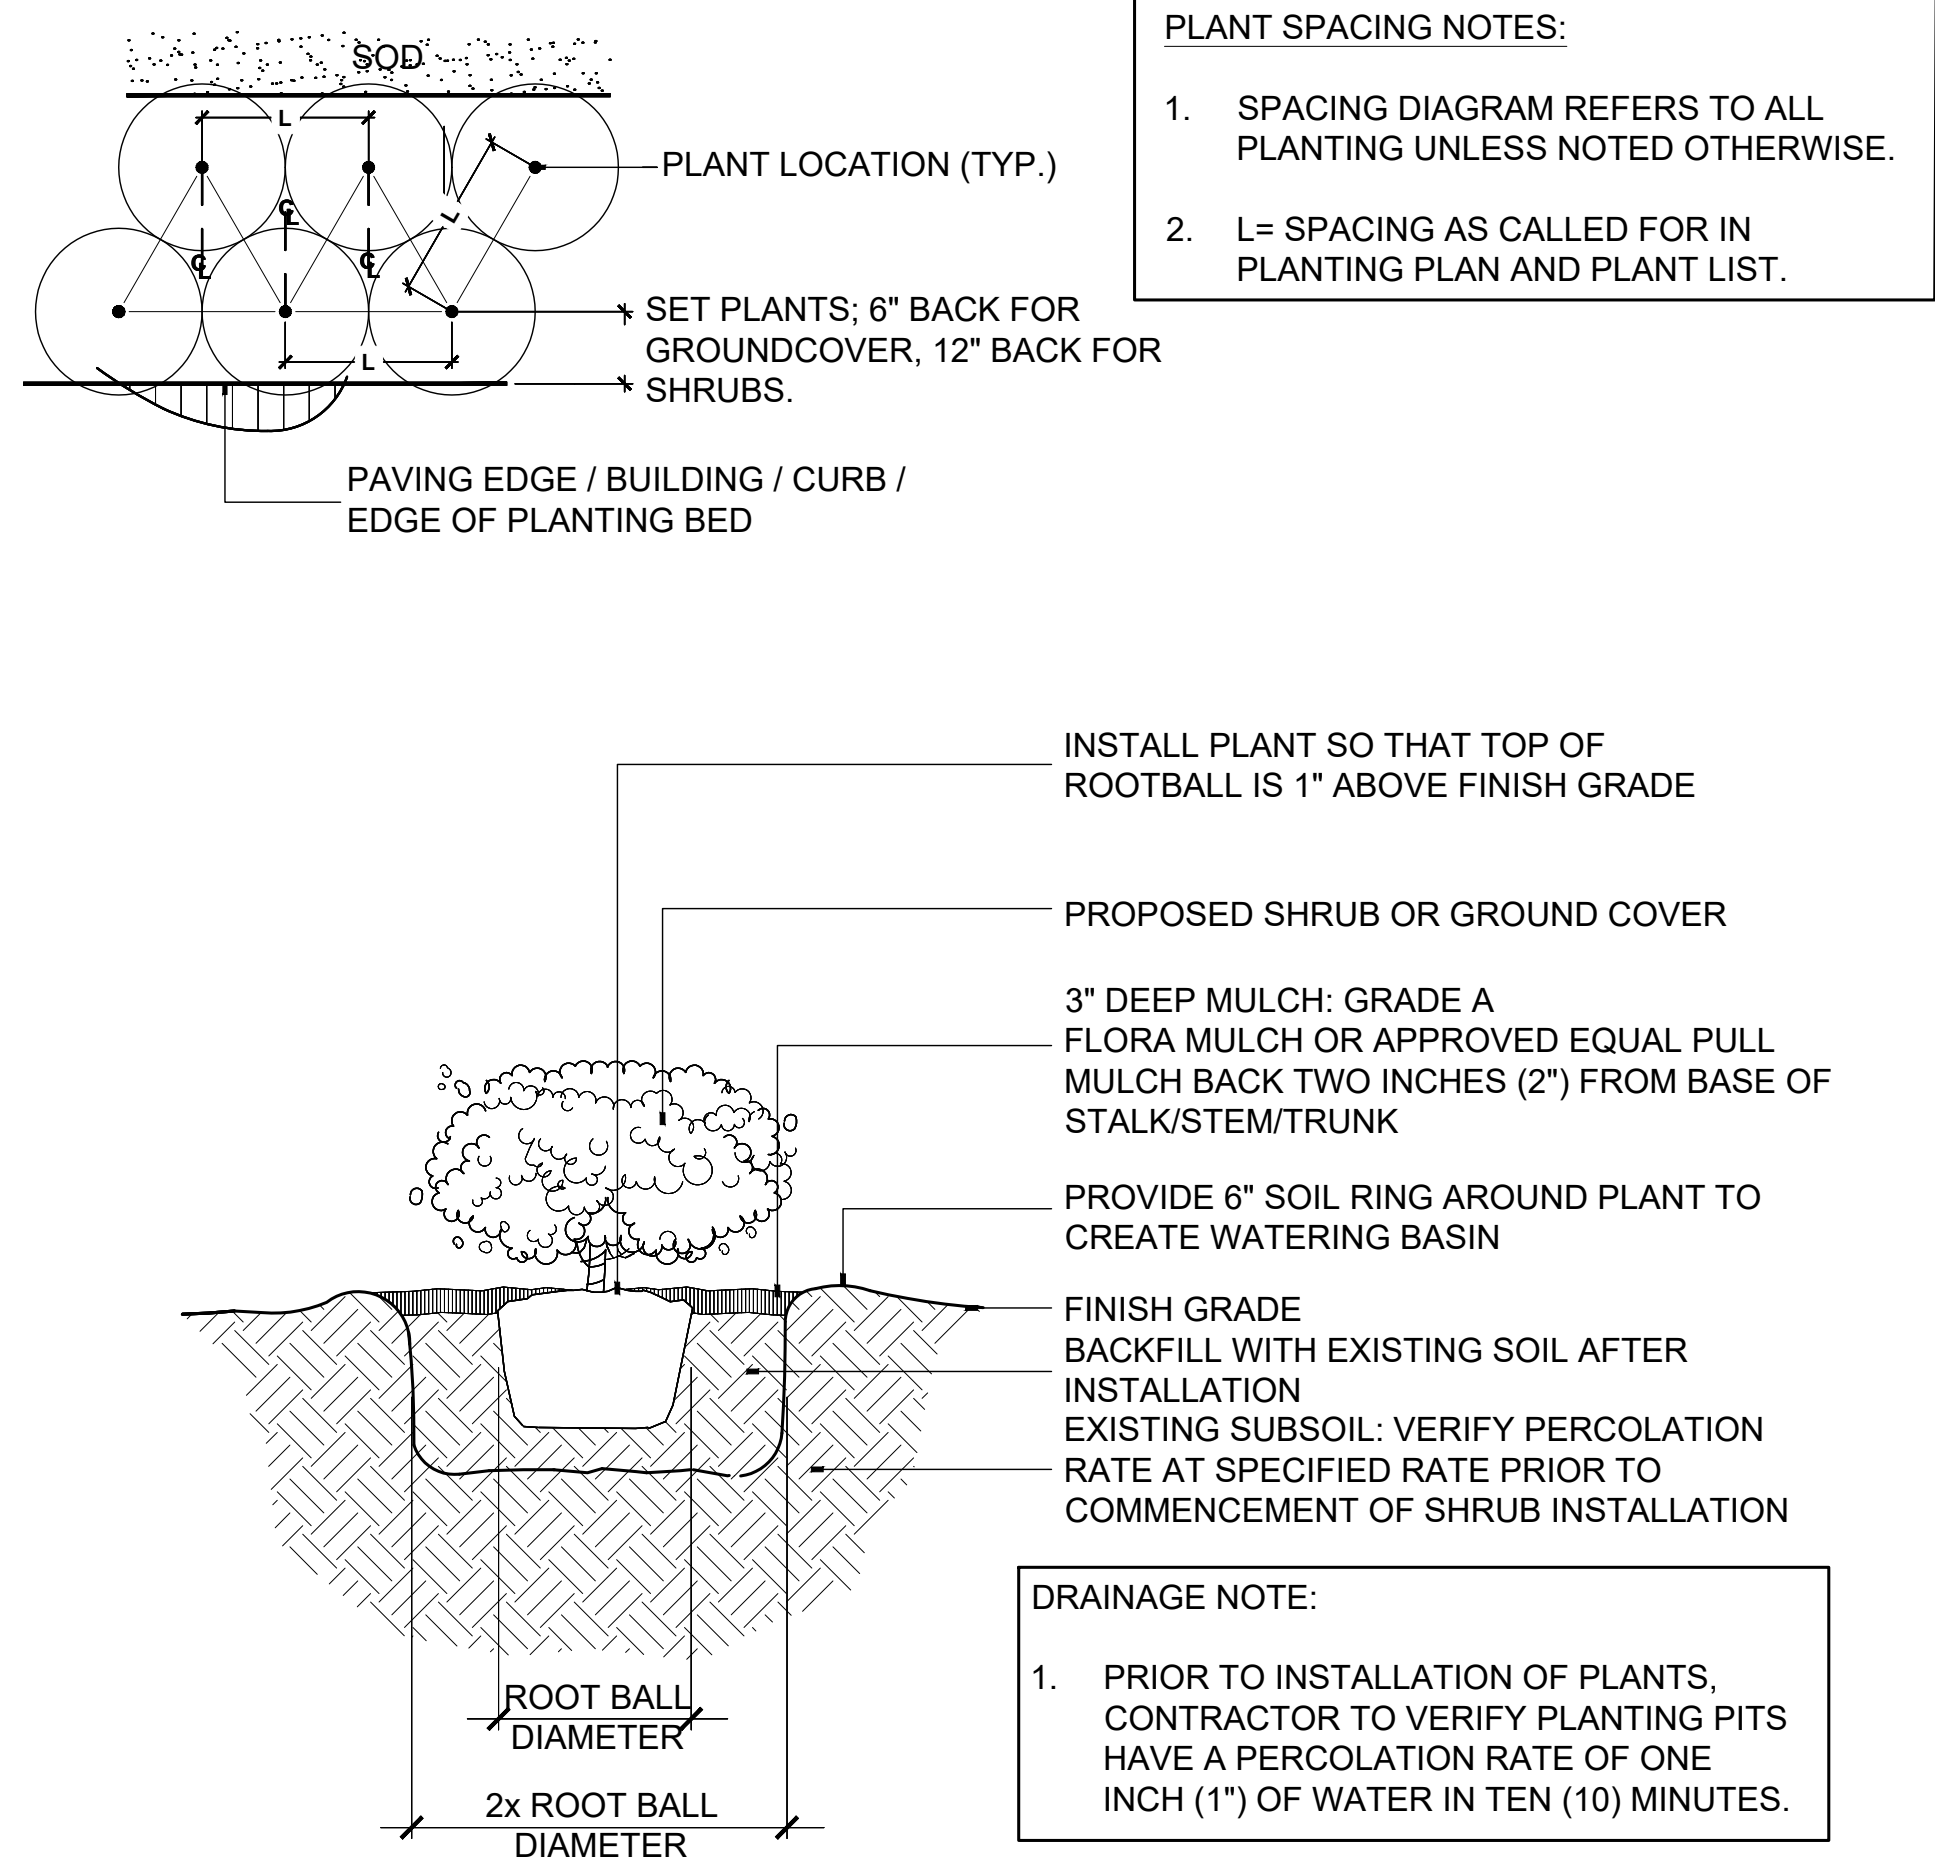


- PLANT SPACING NOTES:**
- SPACING DIAGRAM REFERS TO ALL PLANTING UNLESS NOTED OTHERWISE.
 - L= SPACING AS CALLED FOR IN PLANTING PLAN AND PLANT LIST.

- DRAINAGE NOTE:**
- PRIOR TO INSTALLATION OF PLANTS, CONTRACTOR TO VERIFY PLANTING PITS HAVE A PERCOLATION RATE OF ONE INCH (1") OF WATER IN TEN (10) MINUTES.

2 ORNAMENTAL TREE 2' CALIPER OR LESS INSTALLATION SECTION DETAIL
LD-01 SCALE: 1/2"=1' -0"

3 SHRUB INSTALLATION PLAN & DETAIL
LD-01 SCALE: 1/2"=1' -0"

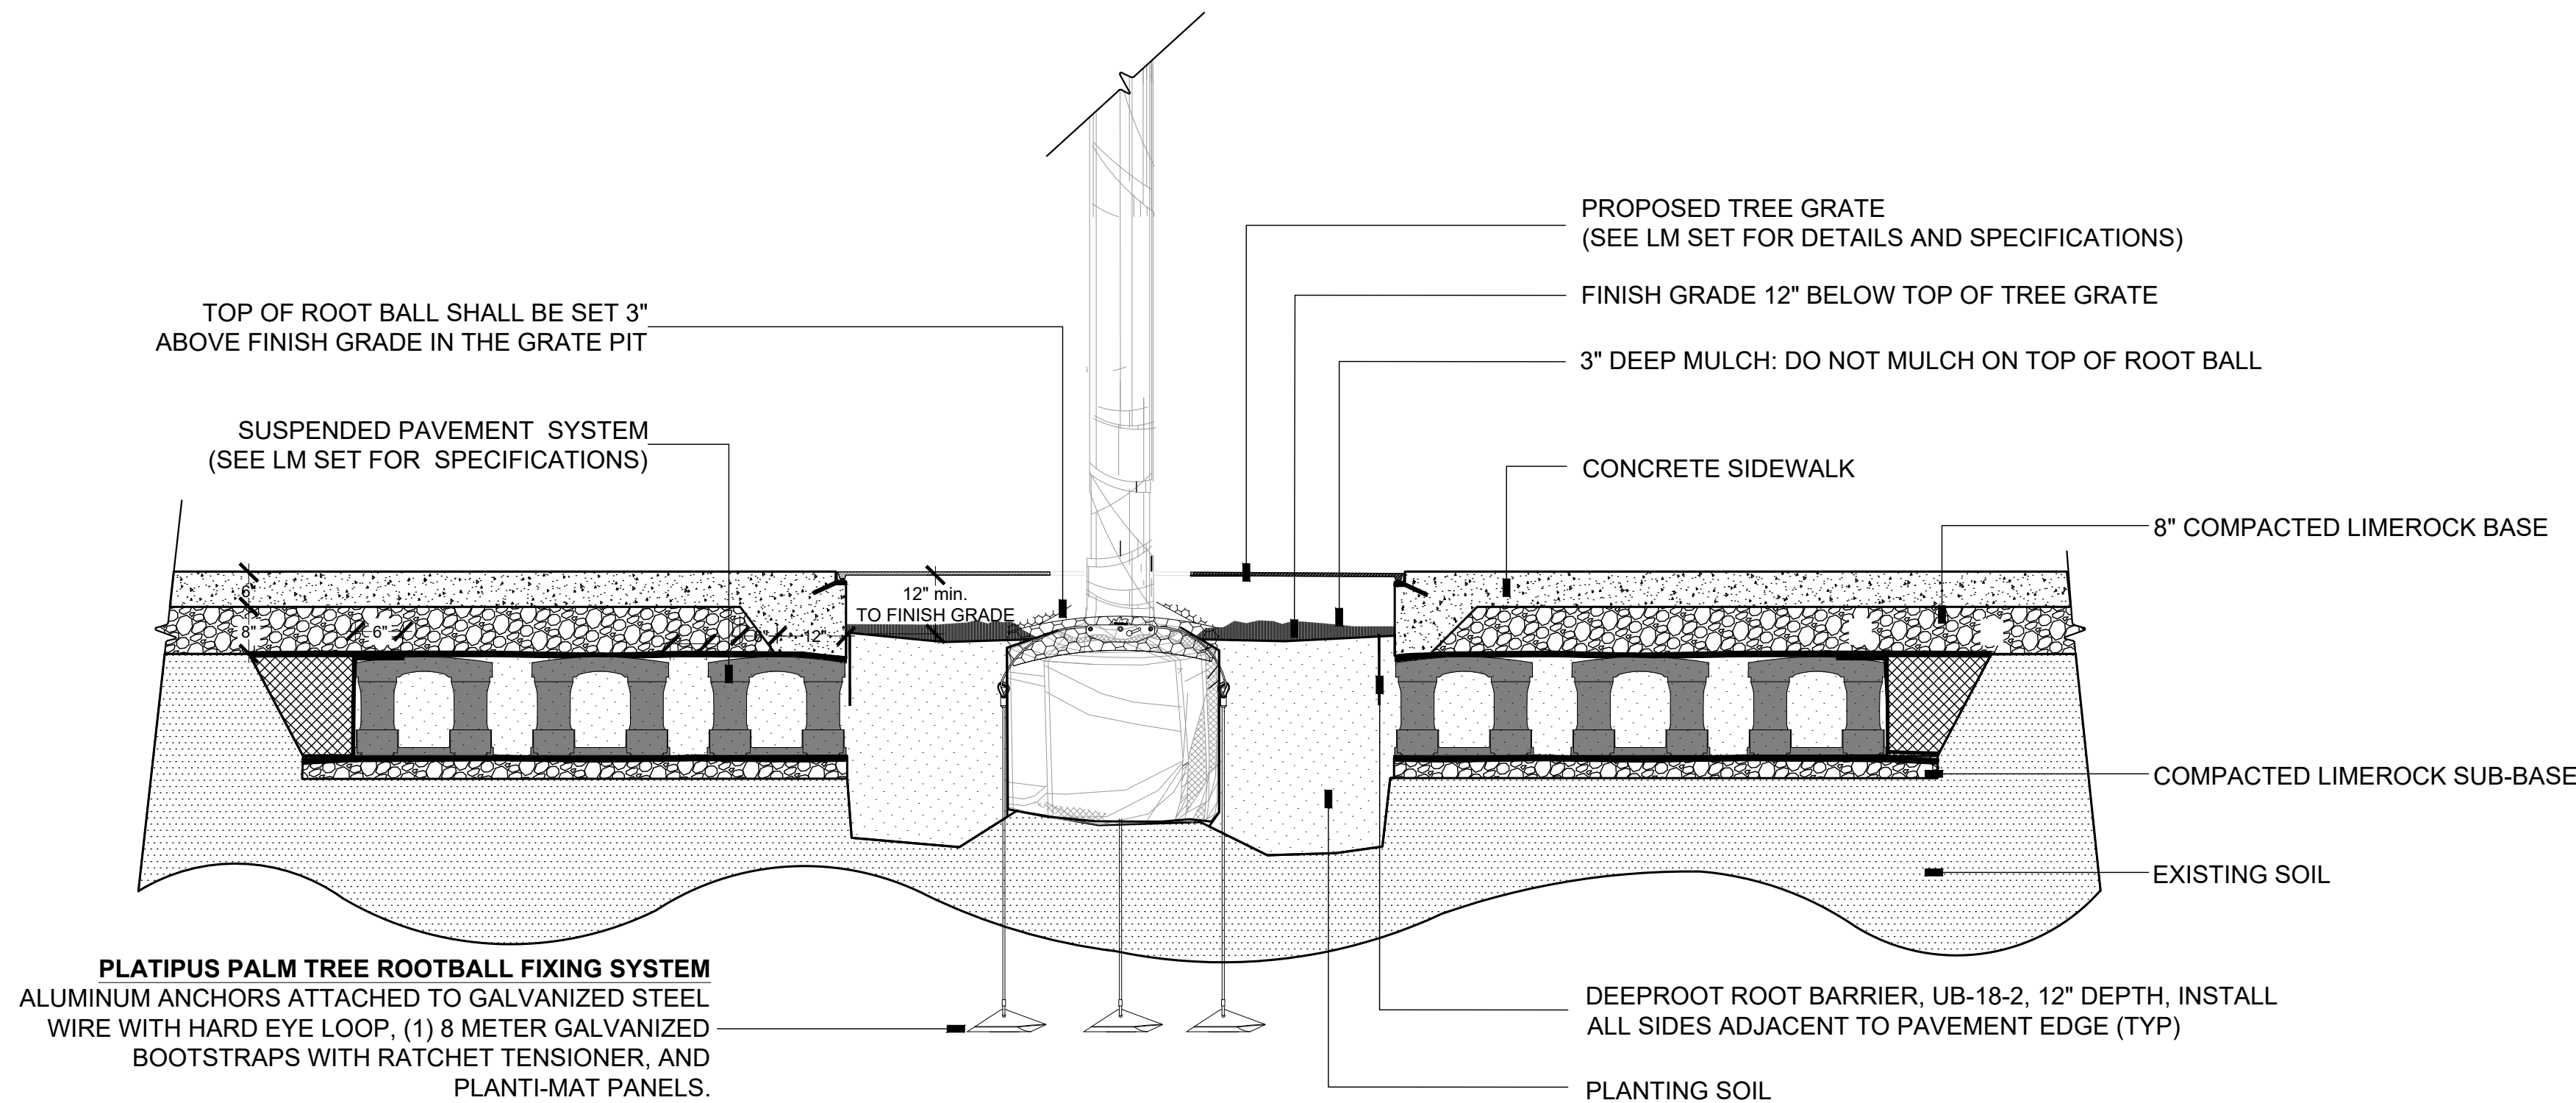

4 TREE/ PALM ON THE R.O.W. SUSPENDED PAVEMENT AND PLATIPUS INSTALLATION DETAIL
LD-01 SCALE: 1/2" = 1'-0"

1 PALM/TREE INSTALLATION DETAIL
LD-01 SCALE: 1/2"=1' -0"

REVISIONS:		

DRAWING SHEET INFORMATION		
BA PROJECT NO.:	02437	
SCALE:	AS NOTED	
DATE:	11-05-2024	
DRAWN BY:	MFM	
CHECKED BY:	KJO	