

Andrew Tamlin
C/O Don Ginsburg
ClubLink US, LLC
551 S. Powerline Road
Pompano Beach, FL 33069

Re: Oaks at Palm Aire (Pompano Beach)
Traffic Statement
Folio ID 4942-05-00-0047/-0020

JFO Group Inc. has been retained to prepare a traffic impact analysis to determine the impact of the proposed project to Level of Service operations in the project vicinity. This traffic analysis is associated with a site plan application for the Oaks at Palm Aire project to relocate the existing clubhouse and to add a 216 multifamily development on the subject site. The existing $\pm 17,942$ SF clubhouse is proposed to be demolished. A new $\pm 11,731$ SF Clubhouse along with a $\pm 4,125$ SF Cart Barn and a $\pm 5,234$ SF Maintenance Facility will be built on the northern portion of the site.

The subject site is located at 3701 Oaks Clubhouse Drive in the City of Pompano Beach, Florida. Parcel IDs associated with this project are 4942-05-00-0047/-0020. Figure 1 shows the project location in relation to the transportation network.

Project traffic potentially generated by the proposed development was calculated using the *Trip Generation Manual, 11th Edition* from the Institute of Transportation Engineers (ITE) publication. Exhibit 1 includes a copy of the ITE trip generation and pass-by rates.

According to the 11th Edition (latest) of the Trip Generation Manual from the Institute of Transportation Engineers, Clubhouse is not a Land Use associated with a trip generation rate/equation. Clubhouses are considered accessory uses associated to Golf Courses where trip generation rates/equations for golf courses are calculated based on the number of holes or the number of acres associated with the golf course. Therefore, for trip generation purposes and according to the latest ITE Trip Generation manual, the size of the clubhouse does not change the number of trips associated with the golf course. Consequently, for simplification purposes and as part of a conservative analysis, this traffic analysis assumes that having a smaller club house will not generate less trips. Exhibit 1 includes a copy of the ITE trip generation rates/equations for Golf Courses showing that trip generation for golf courses is calculated based on number of holes or acreage and not based on the size of the clubhouse.



Figure 1 : Project Location

Table 1 shows the rates used in order to determine the trip generation for Daily, AM, and PM peak hour conditions while Table 2 includes the trip generation for the proposed project for Daily, AM and PM peak hour conditions. According to Table 2, the net Daily, AM and PM peak trips potentially generated due to the proposed development are 981, 80 (18 In/62 Out) and 84 (51 In/33 Out) trips respectively.

Table 1: Trip Generation Rates (ITE Trip Generation, 11th Edition)

Land Use	ITE Code	Daily Trip Gen. Rate	AM Peak Hour			PM Peak Hour		
			In	Out	Total	In	Out	Total
Multifamily Housing (Mid-Rise)	221	4.54	23%	77%	0.37	61%	39%	0.39

Table 2: Trip Generation – Proposed Development

Land Use	Intensity	Daily Traffic	AM Peak Hour			PM Peak Hour		
			Total	In	Out	Total	In	Out
Multifamily Housing	216 DUs	$216 \times 4.54 =$	$0.37 \times 216 =$	$100 \times 23\% =$	$100 \times 77\% =$	$0.39 \times 216 =$	$105 \times 61\% =$	$105 \times 39\% =$
		981	18	62	80	51	33	84

Trip distribution and assignment incorporates the characteristics of the proposed development as well as the surrounding network configuration. Figure 2 includes project trip distribution on all roadway links in the project vicinity. Tables 3 and 4 summarize Level of Service analyses at project buildout.

Level of service (LOS) is a qualitative measure used to relate the quality of vehicle traffic service. LOS is used to analyze roadways and intersections by categorizing traffic flow and assigning quality levels of traffic based on performance measure like vehicle speed, density, congestion, etc. LOS for vehicles classifies roadways and intersections into six letter-grade levels, with A describing the highest quality and F describing the lowest quality. Transportation professionals widely consider LOS D for the automobile mode an acceptable condition, and this threshold is often used as a design condition in urbanized areas.

In order to evaluate LOS, traffic counts should be collected to determine existing conditions to then add the project traffic to establish future conditions. Traffic counts should be performed on typical midweek days (Tuesday, Wednesday, or Thursday). All counts collected should follow the Florida Department of Transportation's Manual on Uniform Traffic Studies (MUTS) and other applicable standards. According to all the applicable standards, 24-hour traffic counts in the project vicinity were collected on Wednesday December 6, 2023. Traffic volumes were adjusted by applying the seasonal factor as established in the FDOT Project Forecasting Handbook. Exhibit 3 includes a summary of all traffic data collection efforts while Exhibit 4 includes the latest Peak Seasonal Factors from F-DOT.

Broward County implemented a Transit Concurrency Impact Fee in December 2004. Under this Fee System, the City of Pompano Beach is located in the Northeast Zone. The revised Transportation Concurrency Management System requires payment of a Transit Concurrency Impact Fee prior to building permit based on the type of development and the fee schedule for the Northeast and Central Transit Concurrency Districts.

The City has incorporated the Broward County Transportation Concurrency Management System into its Comprehensive Plan and issues development permits for projects which pay the transit fee prior to building permit issuance. Payment of the fee satisfies concurrency. The city also requires all projects submitted for concurrency review to the Development Review Committee to satisfy County and City load right-of-way requirements prior to the issuance of a building permit.

P&Z



Figure 2:
Traffic Assignment
Oaks at Palm Aire





Table 3: AM Peak Hour Link Analysis

Road	From	To	Ln	AM 2023 ¹ Traffic			Peak Hour Traffic ²		Project Assignment	Project Traffic		Total Traffic With Project		LOS 'C' Capacity ³	V/C
				NB/EB	SB/WB		NB/EB	SB/WB		NB/EB	SB/WB	NB/EB	SB/WB		
Oaks Clubhouse Dr	W Palm Aire Dr	Site	2	112	118		115	122	100%	18	62	133	184	370	0.50
W Palm Aire Dr	Cypress Blvd	Oaks Clubhouse Dr	2	197	161		203	166	20%	4	12	207	178	370	0.56
W Palm Aire Dr	Oaks Clubhouse Dr	SW 36th Ave	2	290	216		299	222	80%	50	14	349	236	370	0.94

OAKS AT PALM AIRE	In	Out
AM Peak Hour Traffic	18	62

Table 4: PM Peak Hour Link Analysis

Road	From	To	Ln	PM 2023 ¹ Traffic			Peak Hour Traffic ²		Project Assignment	Project Traffic		Total Traffic With Project		LOS 'C' Capacity ³	V/C
				NB/EB	SB/WB		NB/EB	SB/WB		NB/EB	SB/WB	NB/EB	SB/WB		
Oaks Clubhouse Dr	W Palm Aire Dr	Site	2	117	116		121	119	100%	51	33	172	152	370	0.46
W Palm Aire Dr	Cypress Blvd	Oaks Clubhouse Dr	2	169	206		174	212	20%	10	7	184	219	370	0.59
W Palm Aire Dr	Oaks Clubhouse Dr	SW 36th Ave	2	248	272		255	280	80%	26	41	281	321	370	0.87

OAKS AT PALM AIRE	In	Out
PM Peak Hour Traffic	51	33

As shown in Table 3 and Table 4, Volume/Capacity ratios in the nearby roadways is less than 1.0. Therefore, there is enough roadway capacity to accommodate the traffic generated by the proposed project. Both Oaks Clubhouse Drive and W Palm Aire Drive currently operate at LOS 'C' and will continue to operate at LOS 'C' after the Oaks at Palm Aire project is fully built.

¹ Exhibit 2 includes a summary of the field counts.

² Exhibit 3 includes FDOT PSF applicable to the count locations. 2022 PSF=1.03.

³ Exhibit 4 includes FDOT LOS Standards. LOS 'C' Capacity for a 2-lane 35 mph road is 370 vehicles per hour.

2024-10-14_Oaks at Palm Aire (Pompano Beach)_Traffic_1163.01

The Oaks at Palm Aire project is proposing to relocate the existing Clubhouse and to add a 216 multifamily development on the subject site located at 3701 Oaks Clubhouse Drive in the City of Pompano Beach, Florida. This development will most likely generate 981 net daily trips where 80 (18 In/62 Out) trips will occur during the AM peak hour and 84 (51 In/33 Out) during the PM peak hour.


This analysis shows that the proposed development will be in compliance with transportation concurrency requirements in the City of Pompano Beach once Transportation Concurrency Fees are paid to Broward County for 84 peak hour trips.

According to the Highway Capacity Manual (HCM) and AASHTO Geometric Design of Highways and Streets ("Green Book"), LOS Standards use letters A through F, with A being the best and F being the worst, similar to academic grading. LOS 'C' is characterized by stable flow, most experienced drivers are comfortable, roads remain safely below but efficiently close to capacity, and posted speed is maintained. This is the target LOS for some urban and most rural highways. As shown in this analysis, both Oaks Clubhouse Drive and W Palm Aire Drive currently operate at LOS 'C' and will continue to operate at LOS 'C' after the Oaks at Palm Aire project is fully built.

Sincerely,

JFO GROUP INC

COA Number 32276

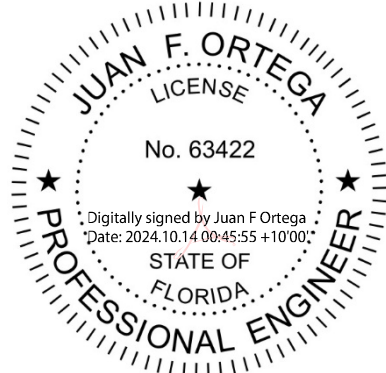

Enclosures:

- Exhibit 1: Trip Generation Rates
- Exhibit 2: 2023 Field Counts
- Exhibit 3: F-DOT Peak Season Factors
- Exhibit 4: F-DOT LOS Standards
- Exhibit 5: DRC Traffic Comments

P&Z

This Page Intentionally Left Blank

Land Use: 221

Multifamily Housing (Mid-Rise)

Description

Mid-rise multifamily housing includes apartments and condominiums located in a building that has between four and 10 floors of living space. Access to individual dwelling units is through an outside building entrance, a lobby, elevator, and a set of hallways.

Multifamily housing (low-rise) (Land Use 220), multifamily housing (high-rise) (Land Use 222), off-campus student apartment (mid-rise) (Land Use 226), and mid-rise residential with ground-floor commercial (Land Use 231) are related land uses.

Land Use Subcategory

Data are presented for two subcategories for this land use: (1) not close to rail transit and (2) close to rail transit. A site is considered close to rail transit if the walking distance between the residential site entrance and the closest rail transit station entrance is ½ mile or less.

Additional Data

For the six sites for which both the number of residents and the number of occupied dwelling units were available, there were an average of 2.5 residents per occupied dwelling unit.

For the five sites for which the numbers of both total dwelling units and occupied dwelling units were available, an average of 96 percent of the total dwelling units were occupied.

The technical appendices provide supporting information on time-of-day distributions for this land use. The appendices can be accessed through either the ITETripGen web app or the trip generation resource page on the ITE website (<https://www.ite.org/technical-resources/topics/trip-and-parking-generation/>).

It is expected that the number of bedrooms and number of residents are likely correlated to the trips generated by a residential site. To assist in future analysis, trip generation studies of all multifamily housing should attempt to obtain information on occupancy rate and on the mix of residential unit sizes (i.e., number of units by number of bedrooms at the site complex).

The sites were surveyed in the 1990s, the 2000s, the 2010s, and the 2020s in Alberta (CAN), California, District of Columbia, Florida, Georgia, Illinois, Maryland, Massachusetts, Minnesota, Montana, New Jersey, New York, Ontario (CAN), Oregon, Utah, and Virginia.

Source Numbers

168, 188, 204, 305, 306, 321, 818, 857, 862, 866, 901, 904, 910, 949, 951, 959, 963, 964, 966, 967, 969, 970, 1004, 1014, 1022, 1023, 1025, 1031, 1032, 1035, 1047, 1056, 1057, 1058, 1071, 1076

Multifamily Housing (Mid-Rise) Not Close to Rail Transit (221)

Vehicle Trip Ends vs: Dwelling Units
On a: Weekday

Setting/Location: General Urban/Suburban

Number of Studies: 11


Avg. Num. of Dwelling Units: 201

Directional Distribution: 50% entering, 50% exiting

Vehicle Trip Generation per Dwelling Unit

Average Rate	Range of Rates	Standard Deviation
4.54	3.76 - 5.40	0.51

Data Plot and Equation

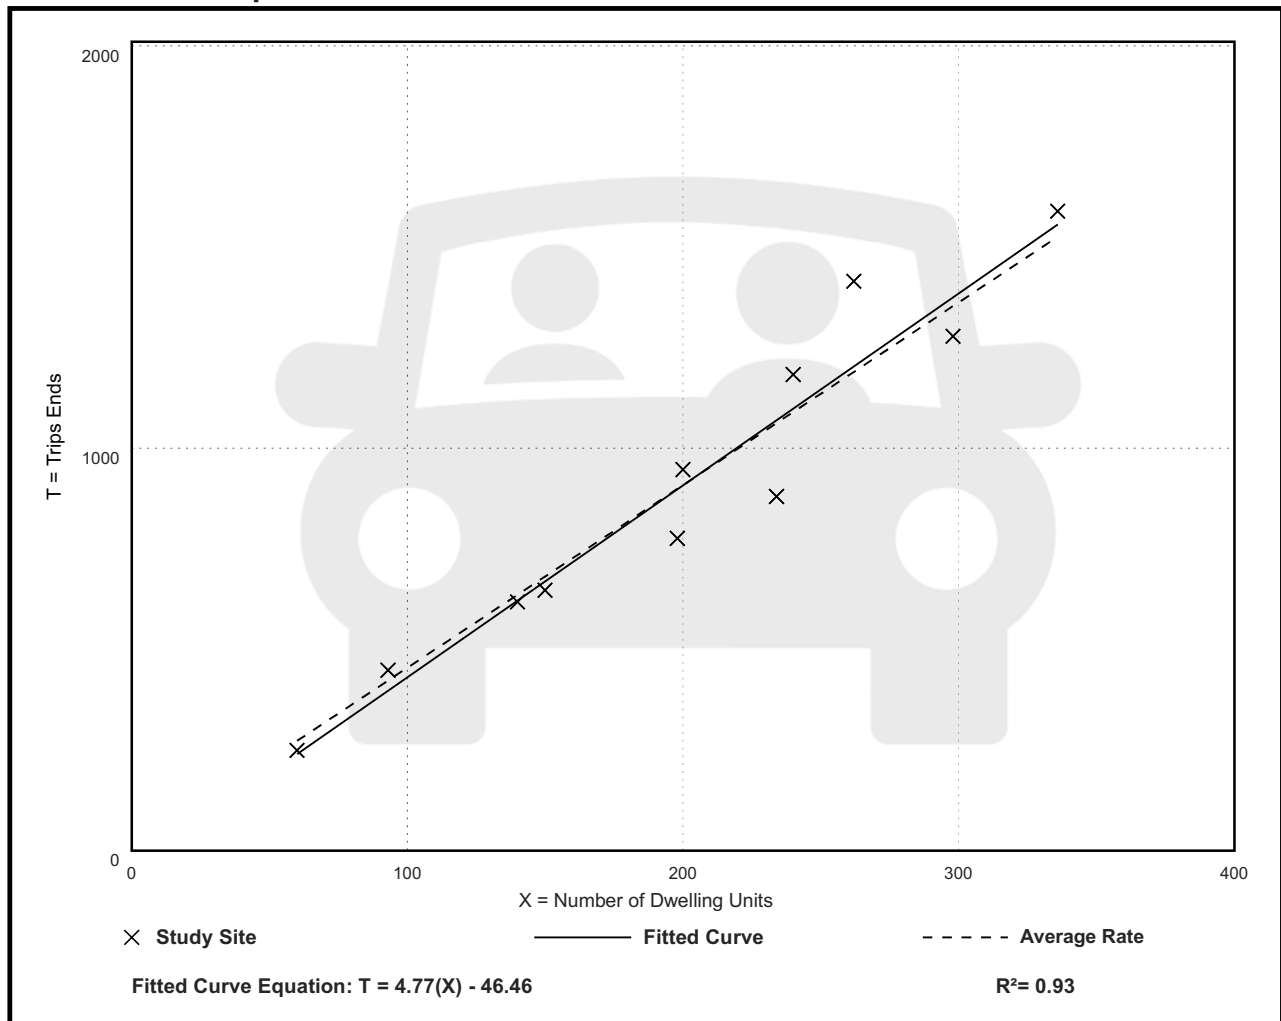

Multifamily Housing (Mid-Rise) Not Close to Rail Transit (221)

Vehicle Trip Ends vs: Dwelling Units

On a: Weekday,

Peak Hour of Adjacent Street Traffic,

One Hour Between 7 and 9 a.m.

Setting/Location: General Urban/Suburban

Number of Studies: 30


Avg. Num. of Dwelling Units: 173

Directional Distribution: 23% entering, 77% exiting

Vehicle Trip Generation per Dwelling Unit

Average Rate	Range of Rates	Standard Deviation
0.37	0.15 - 0.53	0.09

Data Plot and Equation

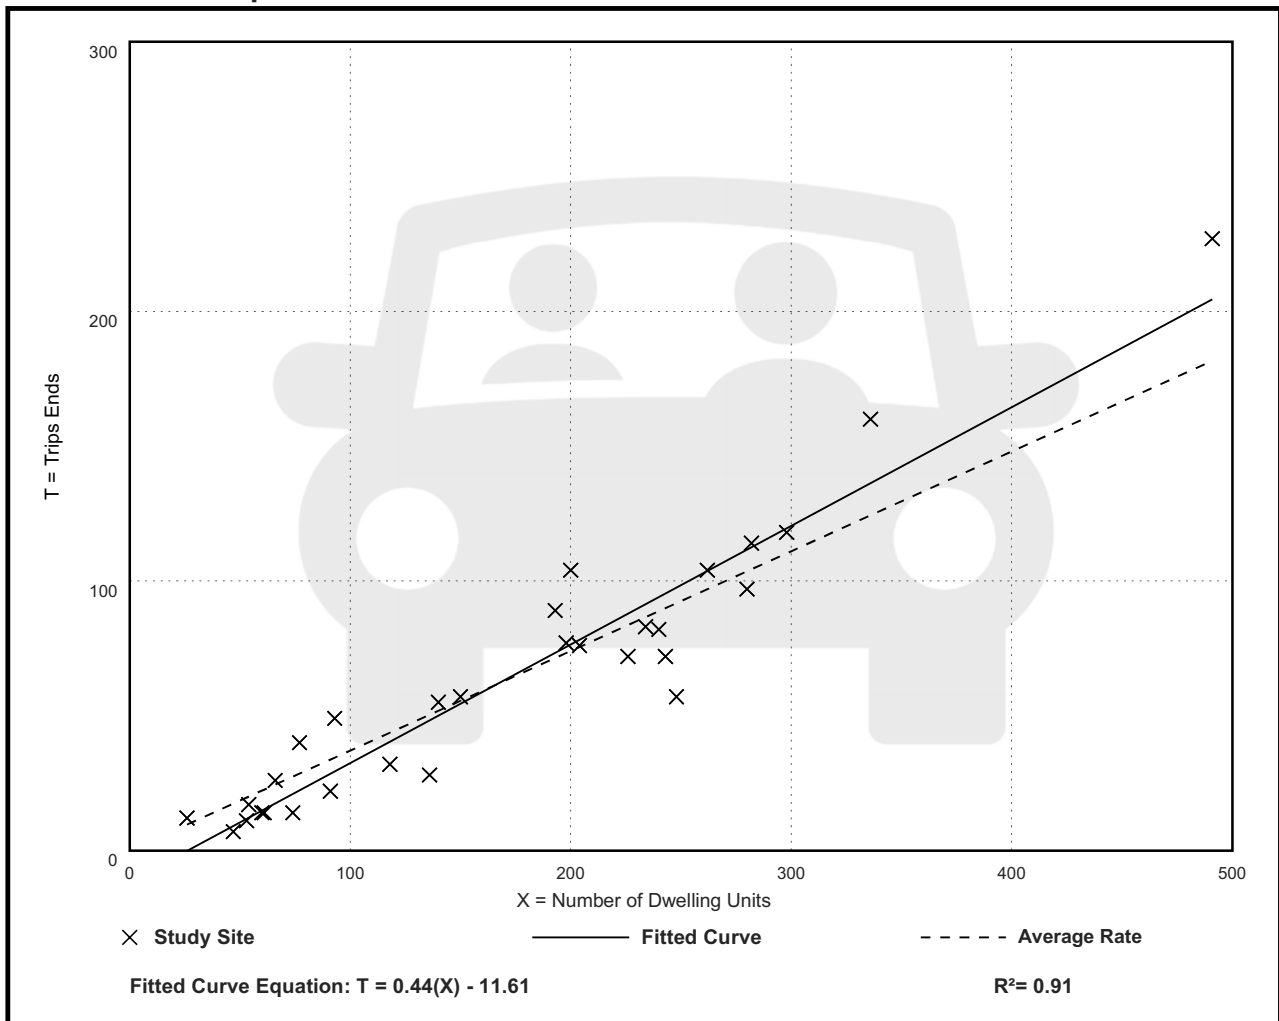

Multifamily Housing (Mid-Rise) Not Close to Rail Transit (221)

Vehicle Trip Ends vs: Dwelling Units

On a: Weekday,

Peak Hour of Adjacent Street Traffic,

One Hour Between 4 and 6 p.m.

Setting/Location: General Urban/Suburban

Number of Studies: 31


Avg. Num. of Dwelling Units: 169

Directional Distribution: 61% entering, 39% exiting

Vehicle Trip Generation per Dwelling Unit

Average Rate	Range of Rates	Standard Deviation
0.39	0.19 - 0.57	0.08

Data Plot and Equation

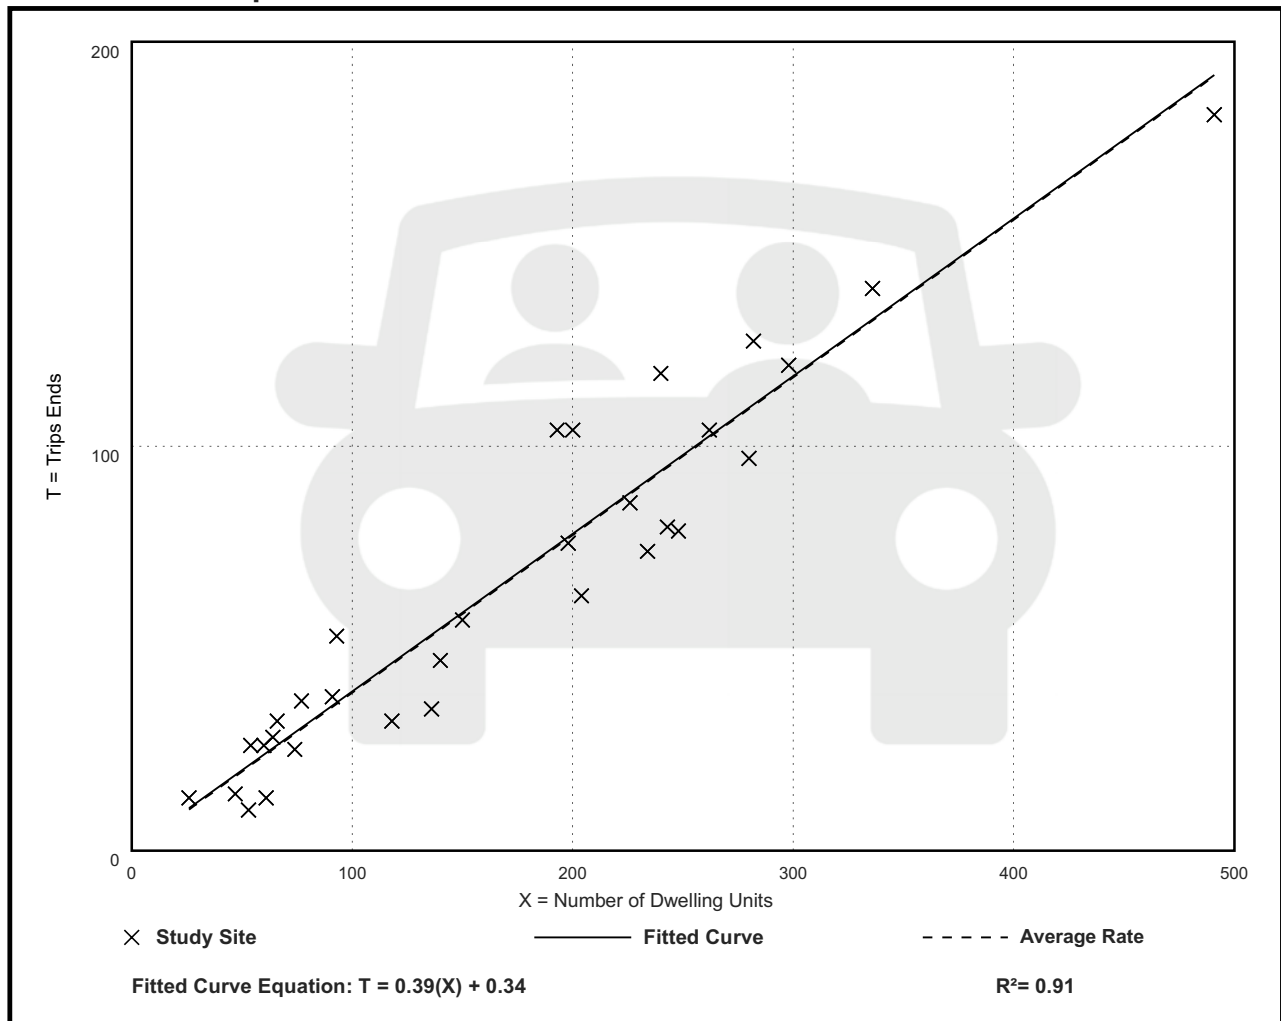

Land Use: 430

Golf Course

Description

A golf course is an expansive landscaped area that includes a series of golf holes, each consisting of a tee, fairway, and putting green. The site may have a driving range, clubhouse with a pro shop, restaurant, lounge, or banquet facility. Miniature golf course (Land Use 431), golf driving range (Land Use 432), and multipurpose recreational facility (Land Use 435) are related uses.

Additional Data

The golf courses in this land use are 9-, 18-, and 36-hole municipal courses.

The sites were surveyed in the 1980s, the 1990s, the 2000s, and the 2010s in Alberta (CAN), California, New Jersey, New York, Oregon, Pennsylvania, and Vermont.

Source Numbers

378, 407, 440, 629, 728, 925, 940, 970

Golf Course (430)

Vehicle Trip Ends vs: Holes
On a: Weekday

Setting/Location: General Urban/Suburban

Number of Studies: 4


Avg. Num. of Holes: 23

Directional Distribution: 50% entering, 50% exiting

Vehicle Trip Generation per Hole

Average Rate	Range of Rates	Standard Deviation
30.38	14.50 - 40.50	9.88

Data Plot and Equation

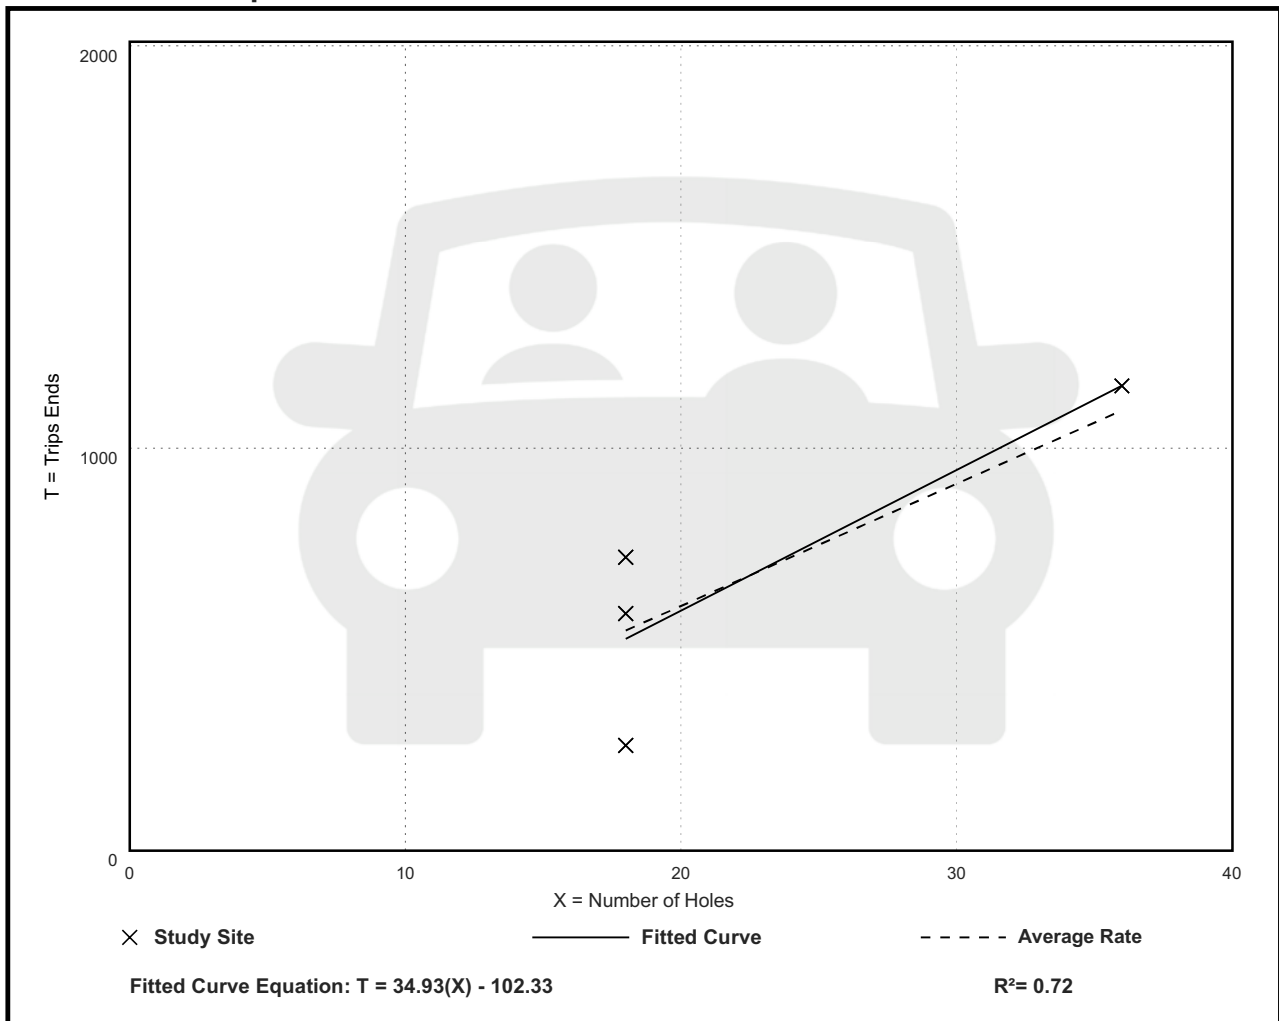

Golf Course (430)

Vehicle Trip Ends vs: Holes

On a: Weekday,

Peak Hour of Adjacent Street Traffic,

One Hour Between 7 and 9 a.m.

Setting/Location: General Urban/Suburban

Number of Studies: 15


Avg. Num. of Holes: 18

Directional Distribution: 79% entering, 21% exiting

Vehicle Trip Generation per Hole

Average Rate	Range of Rates	Standard Deviation
1.76	0.61 - 3.06	0.64

Data Plot and Equation

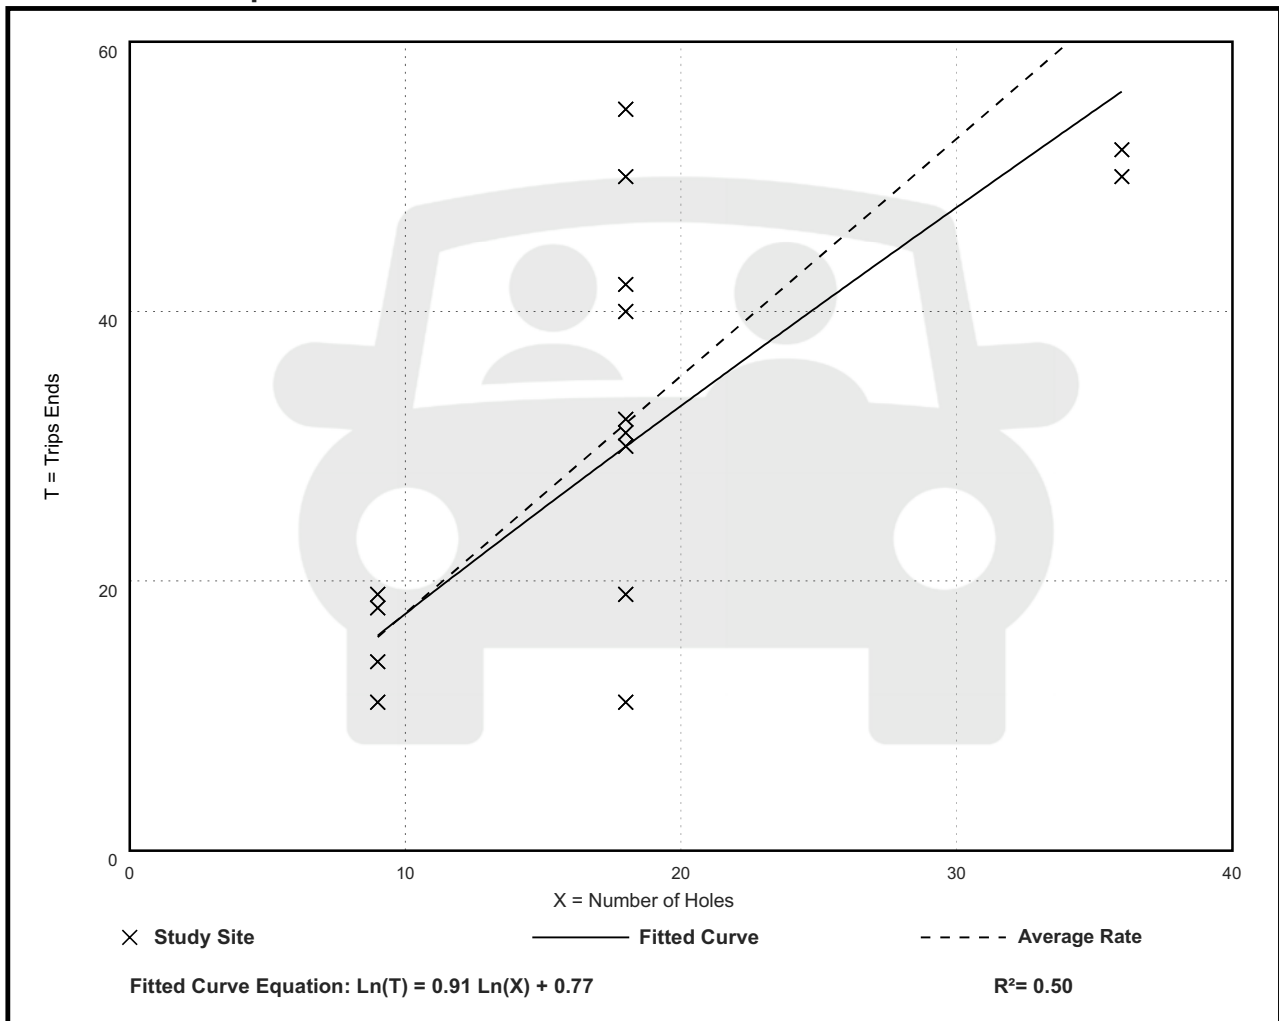

Golf Course (430)

Vehicle Trip Ends vs: Holes

On a: Weekday,

Peak Hour of Adjacent Street Traffic,

One Hour Between 4 and 6 p.m.

Setting/Location: General Urban/Suburban

Number of Studies: 14


Avg. Num. of Holes: 19

Directional Distribution: 53% entering, 47% exiting

Vehicle Trip Generation per Hole

Average Rate	Range of Rates	Standard Deviation
2.91	1.67 - 5.00	0.93

Data Plot and Equation

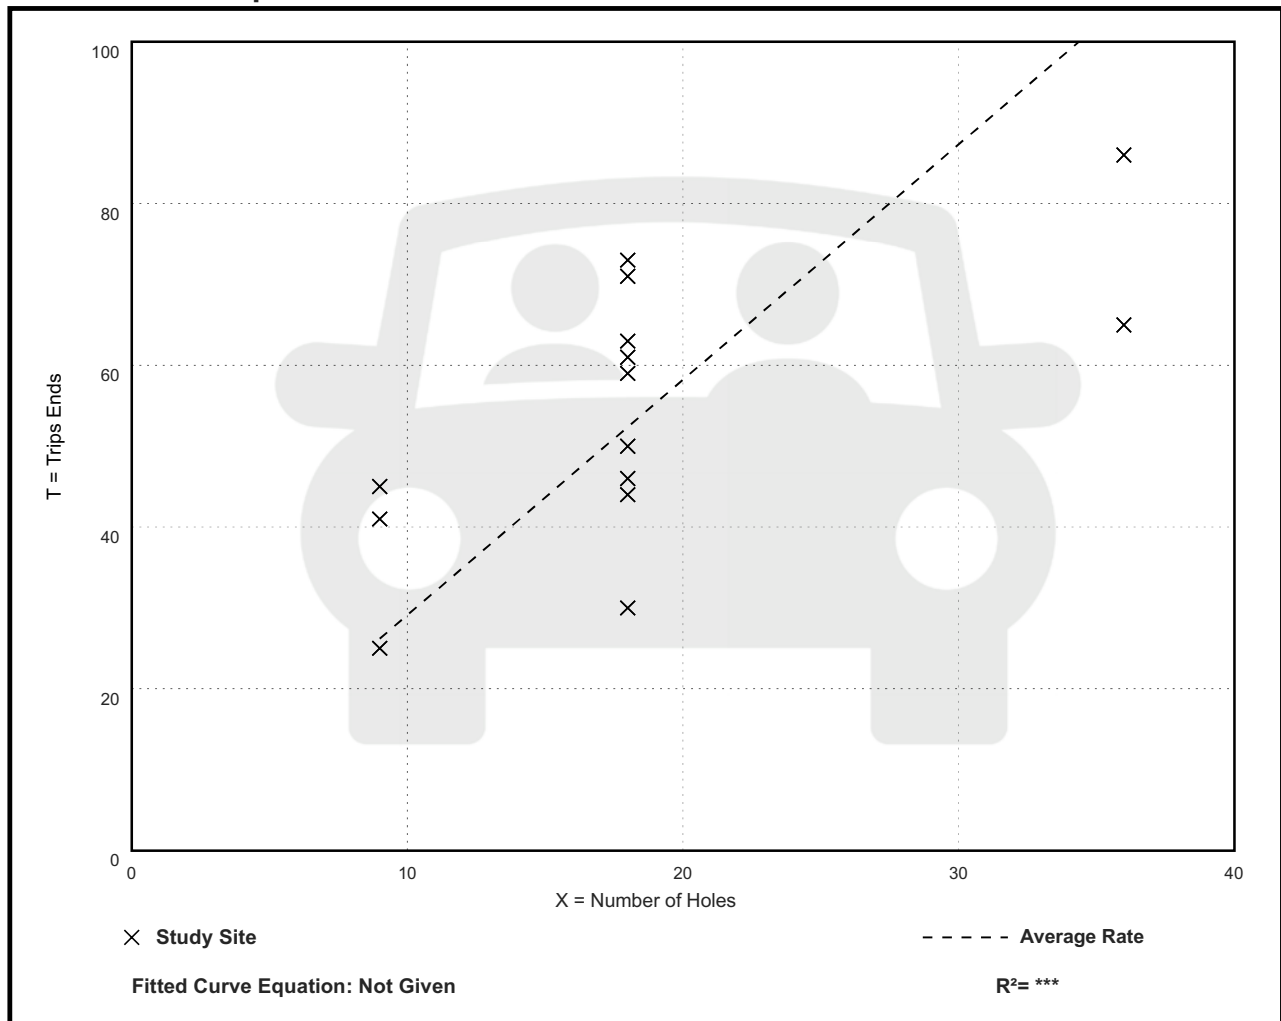

Golf Course (430)

Vehicle Trip Ends vs: Acres
On a: Weekday

Setting/Location: General Urban/Suburban

Number of Studies: 3


Avg. Num. of Acres: 220

Directional Distribution: 50% entering, 50% exiting

Vehicle Trip Generation per Acre

Average Rate	Range of Rates	Standard Deviation
3.74	2.82 - 5.77	1.47

Data Plot and Equation

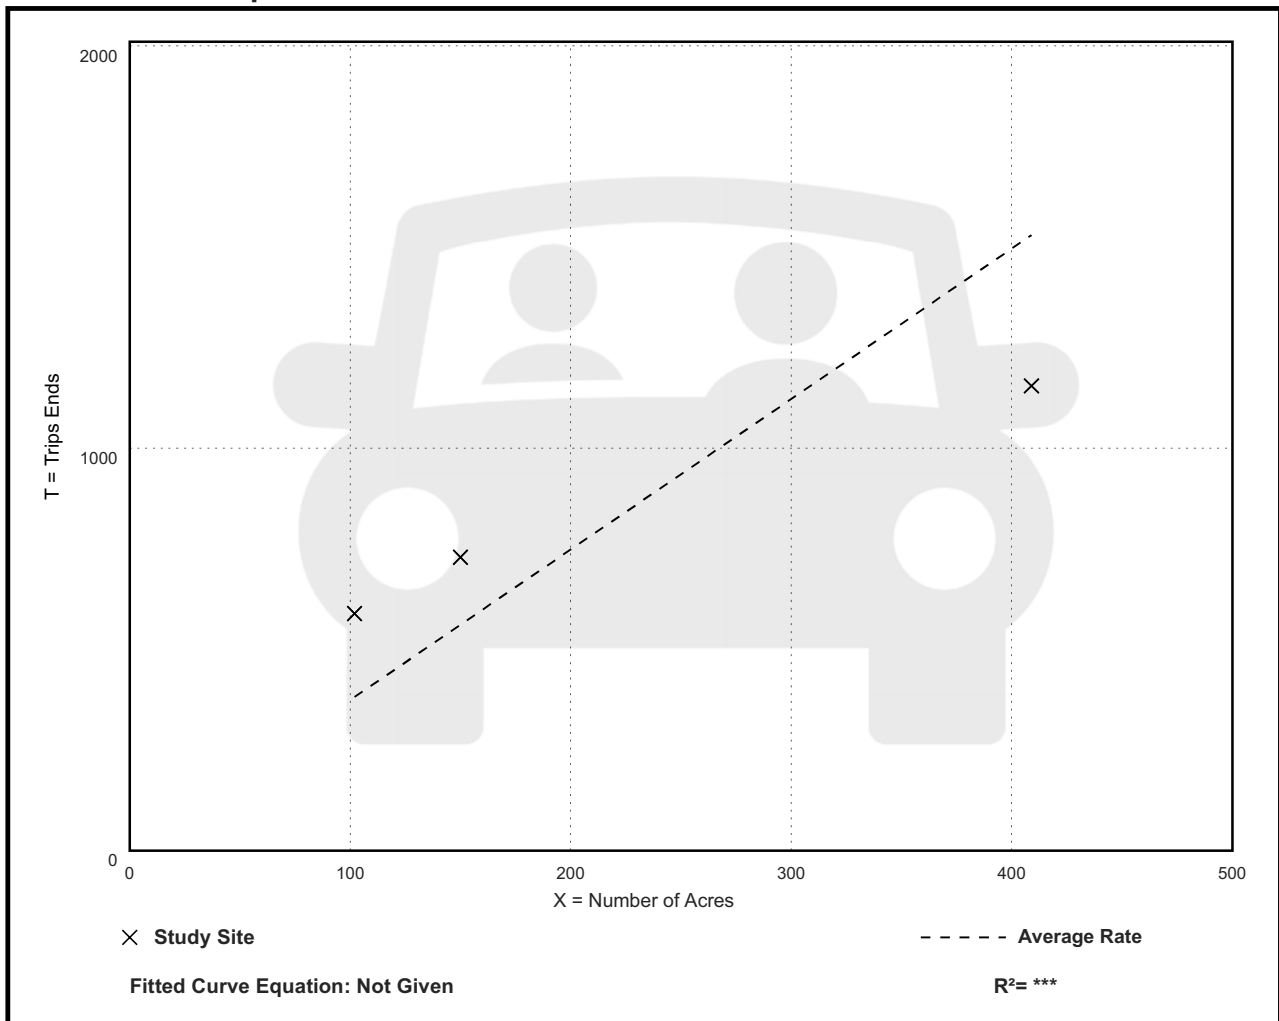

Golf Course (430)

Vehicle Trip Ends vs: Acres

On a: Weekday,

Peak Hour of Adjacent Street Traffic,

One Hour Between 7 and 9 a.m.

Setting/Location: General Urban/Suburban

Number of Studies: 3


Avg. Num. of Acres: 220

Directional Distribution: 74% entering, 26% exiting

Vehicle Trip Generation per Acre

Average Rate	Range of Rates	Standard Deviation
0.19	0.13 - 0.31	0.10

Data Plot and Equation

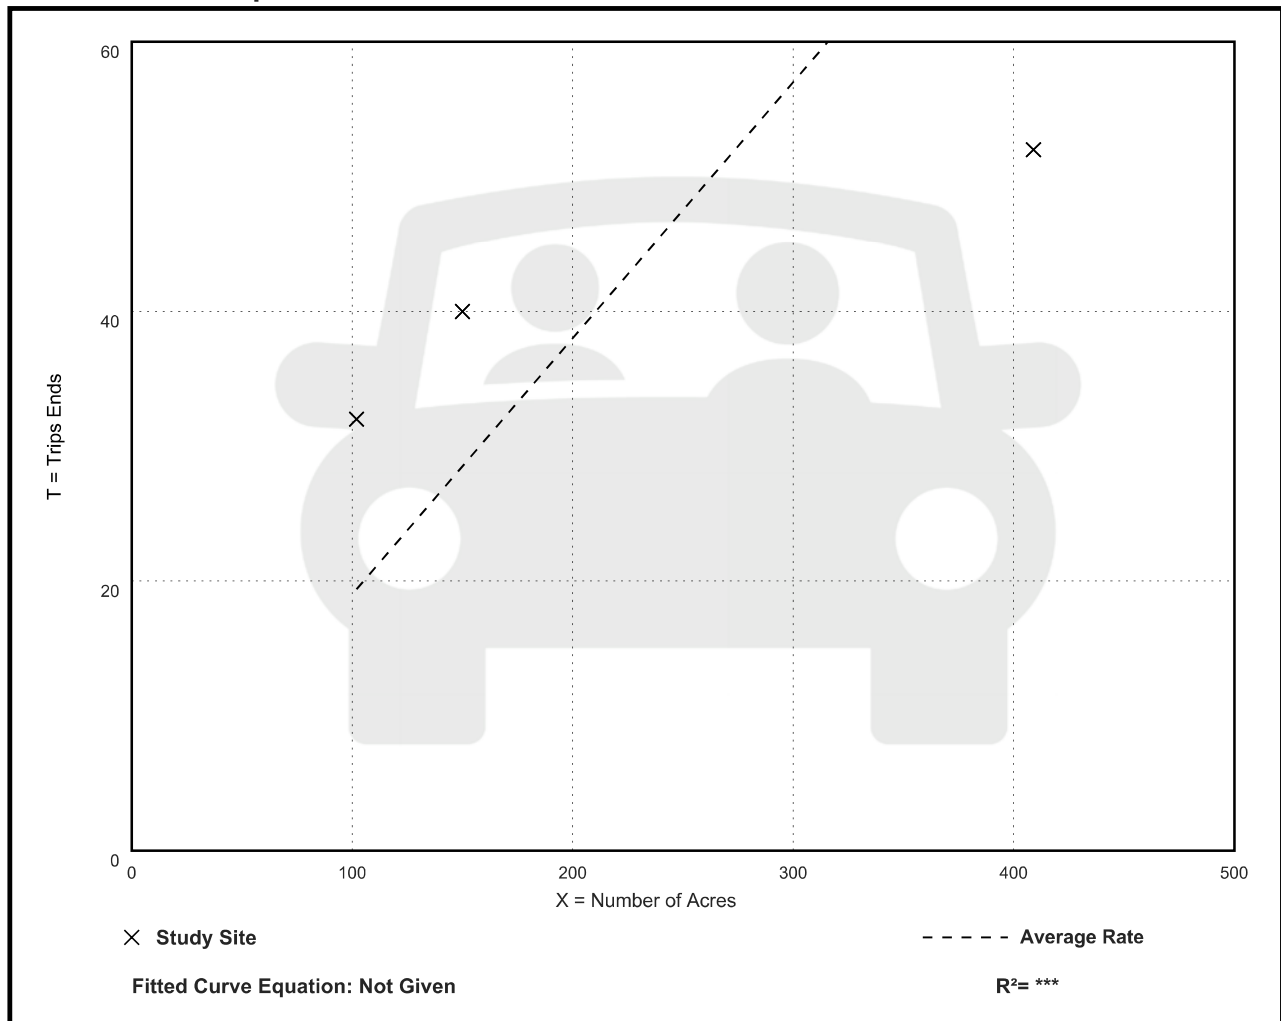

Golf Course (430)

Vehicle Trip Ends vs: Acres

On a: Weekday,

Peak Hour of Adjacent Street Traffic,

One Hour Between 4 and 6 p.m.

Setting/Location: General Urban/Suburban

Number of Studies: 3


Avg. Num. of Acres: 220

Directional Distribution: 34% entering, 66% exiting

Vehicle Trip Generation per Acre

Average Rate	Range of Rates	Standard Deviation
0.28	0.21 - 0.45	0.11

Data Plot and Equation

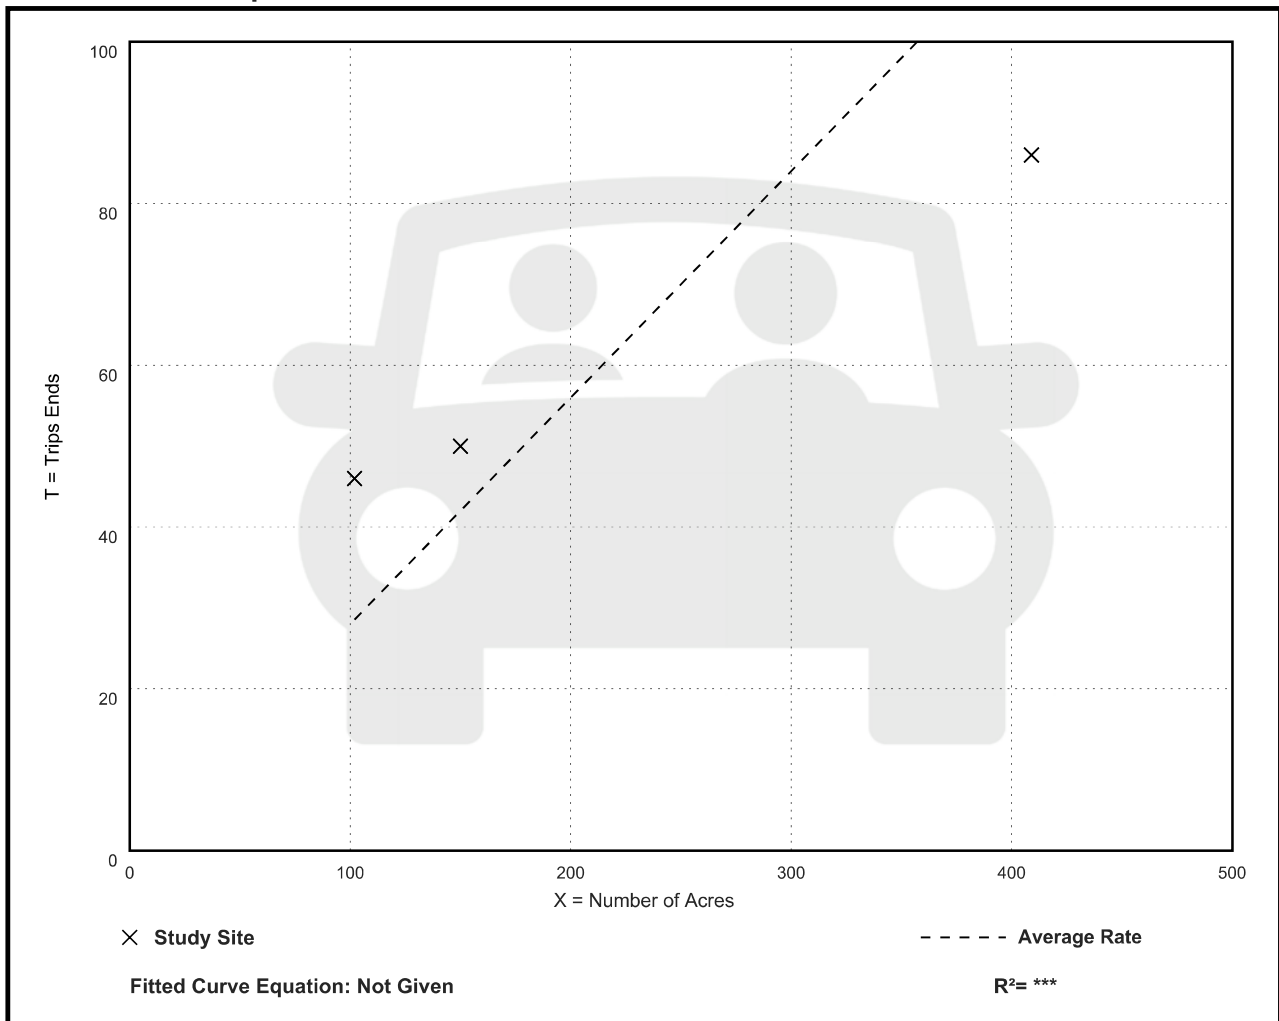

This Page Intentionally Left Blank

Automatic traffic recorder - All traffic
On Oak Clubhouse Dr., approximately 425 feet
north of Palm Aire Dr., Pompano Beach, FL

WWW.KMFTRAFFIC.NET
(772) 924-6993

Site Code: JO2340
Date Start: 12/6/2023
Date End: 12/6/2023

Start Time	12/6/2023 Wed	SB	NB	Total
12:00 AM		0	1	1
12:15		1	0	1
12:30		0	1	1
12:45		0	0	0
01:00		0	1	1
01:15		0	1	1
01:30		1	0	1
01:45		0	1	1
02:00		0	0	0
02:15		0	0	0
02:30		0	0	0
02:45		0	0	0
03:00		0	0	0
03:15		0	0	0
03:30		0	0	0
03:45		0	0	0
04:00		0	0	0
04:15		2	1	3
04:30		3	1	4
04:45		2	0	2
05:00		2	4	6
05:15		0	3	3
05:30		6	4	10
05:45		10	2	12
06:00		3	4	7
06:15		11	11	22
06:30		12	6	18
06:45		11	15	26
07:00		25	18	43
07:15		18	16	34
07:30		22	12	34
07:45		17	16	33
08:00		29	14	43
08:15		19	12	31
08:30		18	24	42
08:45		27	18	45
09:00		17	22	39
09:15		29	23	52
09:30		23	16	39
09:45		34	25	59
10:00		25	25	50
10:15		36	19	55
10:30		19	12	31
10:45		25	24	49
11:00		19	24	43
11:15		23	24	47
11:30		33	33	66
11:45		27	31	58
Total		549	464	1013
Percent		54.2%	45.8%	
Peak	-	09:30	11:00	11:00
Vol.	-	118	112	214
P.H.F.		0.819	0.848	0.811

Automatic traffic recorder - All traffic
On Oak Clubhouse Dr., approximately 425 feet
north of Palm Aire Dr., Pompano Beach, FL

WWW.KMFTRAFFIC.NET
(772) 924-6993

Site Code: JO2340
Date Start: 12/6/2023
Date End: 12/6/2023

Start Time	12/6/2023 Wed	SB	NB	Total
12:00 PM		32	26	58
12:15		19	17	36
12:30		24	21	45
12:45		27	20	47
01:00		21	28	49
01:15		27	30	57
01:30		18	14	32
01:45		20	26	46
02:00		18	24	42
02:15		25	19	44
02:30		27	28	55
02:45		16	28	44
03:00		17	32	49
03:15		18	29	47
03:30		17	22	39
03:45		26	29	55
04:00		19	20	39
04:15		21	26	47
04:30		32	21	53
04:45		26	26	52
05:00		31	30	61
05:15		27	27	54
05:30		24	29	53
05:45		19	22	41
06:00		24	13	37
06:15		16	24	40
06:30		11	17	28
06:45		11	15	26
07:00		9	22	31
07:15		11	16	27
07:30		11	16	27
07:45		7	14	21
08:00		5	18	23
08:15		8	10	18
08:30		6	19	25
08:45		7	7	14
09:00		4	11	15
09:15		3	10	13
09:30		6	4	10
09:45		4	8	12
10:00		3	9	12
10:15		3	6	9
10:30		0	7	7
10:45		2	7	9
11:00		2	3	5
11:15		0	4	4
11:30		0	3	3
11:45		1	2	3
Total		705	859	1564
Percent		45.1%	54.9%	
Peak	-	16:30	14:30	16:30
Vol.	-	116	117	220
P.H.F.		0.906	0.914	0.902
Total		1254	1323	2577
Percent		48.7%	51.3%	

ADT

ADT 1,354

AADT 1,354

P&Z

KMF Traffic Group, LLC

Page 1

Automatic traffic recorder - All traffic
On Palm Aire Dr., approximately 340 feet
west of Oak Clubhouse Dr., Pompano Beach, FL

WWW.KMFTRAFFIC.NET
(772) 924-6993

Site Code: JO2340
Date Start: 12/6/2023
Date End: 12/6/2023

Start Time	12/6/2023 Wed	WB	EB	Total
12:00 AM		8	1	9
12:15		3	2	5
12:30		0	2	2
12:45		2	0	2
01:00		0	2	2
01:15		1	1	2
01:30		2	2	4
01:45		2	1	3
02:00		2	0	2
02:15		0	0	0
02:30		0	0	0
02:45		1	0	1
03:00		0	1	1
03:15		1	0	1
03:30		0	0	0
03:45		1	0	1
04:00		0	0	0
04:15		3	1	4
04:30		2	5	7
04:45		0	3	3
05:00		0	11	11
05:15		1	11	12
05:30		4	12	16
05:45		5	13	18
06:00		2	9	11
06:15		7	11	18
06:30		11	19	30
06:45		13	25	38
07:00		18	22	40
07:15		18	51	69
07:30		18	57	75
07:45		30	53	83
08:00		27	35	62
08:15		29	52	81
08:30		25	44	69
08:45		44	39	83
09:00		29	54	83
09:15		28	42	70
09:30		23	41	64
09:45		25	52	77
10:00		40	50	90
10:15		39	40	79
10:30		39	47	86
10:45		36	42	78
11:00		42	35	77
11:15		31	43	74
11:30		43	51	94
11:45		45	49	94
Total		700	1031	1731
Percent		40.4%	59.6%	
Peak	-	11:00	07:30	11:00
Vol.	-	161	197	339
P.H.F.		0.894	0.864	0.902

P&Z

PZ23-12000017

06-25-2025

Exhibit 2
Page 3 of 6

Automatic traffic recorder - All traffic
On Palm Aire Dr., approximately 340 feet
west of Oak Clubhouse Dr., Pompano Beach, FL

WWW.KMFTRAFFIC.NET
(772) 924-6993

Site Code: JO2340
Date Start: 12/6/2023
Date End: 12/6/2023

Start Time	12/6/2023 Wed	WB	EB	Total
12:00 PM		45	45	90
12:15		45	44	89
12:30		40	41	81
12:45		54	33	87
01:00		35	40	75
01:15		36	37	73
01:30		43	29	72
01:45		45	37	82
02:00		64	37	101
02:15		42	47	89
02:30		39	41	80
02:45		49	25	74
03:00		60	47	107
03:15		36	51	87
03:30		46	37	83
03:45		48	30	78
04:00		44	43	87
04:15		40	51	91
04:30		43	35	78
04:45		50	40	90
05:00		51	40	91
05:15		47	41	88
05:30		58	36	94
05:45		44	43	87
06:00		54	37	91
06:15		45	33	78
06:30		38	30	68
06:45		35	19	54
07:00		35	21	56
07:15		25	13	38
07:30		23	20	43
07:45		33	17	50
08:00		29	14	43
08:15		31	15	46
08:30		22	22	44
08:45		25	8	33
09:00		26	5	31
09:15		14	12	26
09:30		11	8	19
09:45		17	5	22
10:00		17	15	32
10:15		15	6	21
10:30		6	7	13
10:45		11	11	22
11:00		6	7	13
11:15		10	5	15
11:30		4	1	5
11:45		0	0	0
Total		1636	1281	2917
Percent		56.1%	43.9%	
Peak	-	16:45	16:00	- - - - - 16:45
Vol.	-	206	169	- - - - - 363
P.H.F.		0.805	0.828	
Total		2336	2312	4648
Percent		50.3%	49.7%	

ADT

ADT 4,648

AADT 4,648

P&Z

KMF Traffic Group, LLC

Page 1

Automatic traffic recorder - All traffic
On Palm Aire Dr., approximately 475 feet
east of Oak Clubhousr Dr., Pompano Beach. FL

WWW.KMFTRAFFIC.NET
(772) 924-6993

Site Code: JO2340
Date Start: 12/6/2023
Date End: 12/6/2023

Start Time	12/6/2023 Wed	WB	EB	Total
12:00 AM		7	0	7
12:15		4	2	6
12:30		1	1	2
12:45		2	0	2
01:00		1	2	3
01:15		1	0	1
01:30		0	1	1
01:45		3	2	5
02:00		2	0	2
02:15		0	0	0
02:30		0	0	0
02:45		1	0	1
03:00		0	1	1
03:15		0	0	0
03:30		4	1	5
03:45		1	0	1
04:00		0	0	0
04:15		2	3	5
04:30		1	6	7
04:45		1	2	3
05:00		4	10	14
05:15		6	9	15
05:30		5	17	22
05:45		2	23	25
06:00		5	14	19
06:15		15	19	34
06:30		15	28	43
06:45		14	31	45
07:00		21	44	65
07:15		25	60	85
07:30		28	72	100
07:45		32	74	106
08:00		30	51	81
08:15		27	65	92
08:30		35	65	100
08:45		57	56	113
09:00		39	63	102
09:15		31	54	85
09:30		32	62	94
09:45		38	82	120
10:00		50	70	120
10:15		42	62	104
10:30		48	76	124
10:45		45	56	101
11:00		54	49	103
11:15		44	56	100
11:30		65	71	136
11:45		53	64	117
Total		893	1424	2317
Percent		38.5%	61.5%	
Peak	-	11:00	09:45	09:45
Vol.	-	216	290	468
P.H.F.		0.831	0.884	0.944

P&Z

PZ23-12000017

06-25-2025

Exhibit 2
Page 5 of 6

KMF Traffic Group, LLC

Page 2

Automatic traffic recorder - All traffic
On Palm Aire Dr., approximately 475 feet
east of Oak Clubhousr Dr., Pompano Beach. FL

WWW.KMFTRAFFIC.NET
(772) 924-6993

Site Code: JO2340
Date Start: 12/6/2023
Date End: 12/6/2023

Start Time	12/6/2023 Wed	WB	EB	Total
12:00 PM		53	67	120
12:15		55	58	113
12:30		53	57	110
12:45		58	60	118
01:00		46	50	96
01:15		53	59	112
01:30		48	41	89
01:45		57	51	108
02:00		70	51	121
02:15		50	72	122
02:30		57	52	109
02:45		68	43	111
03:00		86	56	142
03:15		54	61	115
03:30		56	44	100
03:45		66	63	129
04:00		61	65	126
04:15		50	55	105
04:30		57	65	122
04:45		66	55	121
05:00		67	65	132
05:15		62	51	113
05:30		77	59	136
05:45		59	57	116
06:00		58	65	123
06:15		57	41	98
06:30		50	32	82
06:45		45	26	71
07:00		52	28	80
07:15		38	20	58
07:30		36	27	63
07:45		48	24	72
08:00		44	10	54
08:15		42	17	59
08:30		36	23	59
08:45		31	14	45
09:00		33	8	41
09:15		21	12	33
09:30		15	11	26
09:45		25	9	34
10:00		21	8	29
10:15		20	8	28
10:30		14	5	19
10:45		15	4	19
11:00		9	11	20
11:15		12	3	15
11:30		6	0	6
11:45		2	3	5
Total		2159	1766	3925
Percent		55.0%	45.0%	
Peak	-	16:45	15:45	- - - - - 16:45
Vol.	-	272	248	- - - - - 502
P.H.F.		0.791	0.861	
Total		3052	3190	6242
Percent		48.9%	51.1%	

ADT

ADT 6,242

AADT 6,242

P&Z

PZ23-12000017

06-25-2025

Exhibit 2
Page 6 of 6

2022 PEAK SEASON FACTOR CATEGORY REPORT - REPORT TYPE: ALL
 CATEGORY: 8601 CEN.-W OF US1 TO SR7

WEEK	DATES	SF	MOCF: 0.97 PSCF
1	01/01/2022 - 01/01/2022	1.00	1.03
2	01/02/2022 - 01/08/2022	1.01	1.04
3	01/09/2022 - 01/15/2022	1.03	1.06
4	01/16/2022 - 01/22/2022	1.02	1.05
5	01/23/2022 - 01/29/2022	1.00	1.03
6	01/30/2022 - 02/05/2022	0.99	1.02
* 7	02/06/2022 - 02/12/2022	0.98	1.01
* 8	02/13/2022 - 02/19/2022	0.97	1.00
* 9	02/20/2022 - 02/26/2022	0.97	1.00
*10	02/27/2022 - 03/05/2022	0.96	0.99
*11	03/06/2022 - 03/12/2022	0.96	0.99
*12	03/13/2022 - 03/19/2022	0.96	0.99
*13	03/20/2022 - 03/26/2022	0.96	0.99
*14	03/27/2022 - 04/02/2022	0.97	1.00
*15	04/03/2022 - 04/09/2022	0.97	1.00
*16	04/10/2022 - 04/16/2022	0.98	1.01
*17	04/17/2022 - 04/23/2022	0.98	1.01
*18	04/24/2022 - 04/30/2022	0.99	1.02
*19	05/01/2022 - 05/07/2022	0.99	1.02
20	05/08/2022 - 05/14/2022	1.00	1.03
21	05/15/2022 - 05/21/2022	1.00	1.03
22	05/22/2022 - 05/28/2022	1.01	1.04
23	05/29/2022 - 06/04/2022	1.01	1.04
24	06/05/2022 - 06/11/2022	1.02	1.05
25	06/12/2022 - 06/18/2022	1.03	1.06
26	06/19/2022 - 06/25/2022	1.02	1.05
27	06/26/2022 - 07/02/2022	1.02	1.05
28	07/03/2022 - 07/09/2022	1.02	1.05
29	07/10/2022 - 07/16/2022	1.02	1.05
30	07/17/2022 - 07/23/2022	1.02	1.05
31	07/24/2022 - 07/30/2022	1.01	1.04
32	07/31/2022 - 08/06/2022	1.01	1.04
33	08/07/2022 - 08/13/2022	1.00	1.03
34	08/14/2022 - 08/20/2022	1.00	1.03
35	08/21/2022 - 08/27/2022	1.01	1.04
36	08/28/2022 - 09/03/2022	1.02	1.05
37	09/04/2022 - 09/10/2022	1.03	1.06
38	09/11/2022 - 09/17/2022	1.04	1.07
39	09/18/2022 - 09/24/2022	1.03	1.06
40	09/25/2022 - 10/01/2022	1.02	1.05
41	10/02/2022 - 10/08/2022	1.01	1.04
42	10/09/2022 - 10/15/2022	1.00	1.03
43	10/16/2022 - 10/22/2022	1.00	1.03
44	10/23/2022 - 10/29/2022	1.01	1.04
45	10/30/2022 - 11/05/2022	1.01	1.04
46	11/06/2022 - 11/12/2022	1.01	1.04
47	11/13/2022 - 11/19/2022	1.02	1.05
48	11/20/2022 - 11/26/2022	1.01	1.04
49	11/27/2022 - 12/03/2022	1.01	1.04
50	12/04/2022 - 12/10/2022	1.00	1.03
51	12/11/2022 - 12/17/2022	1.00	1.03
52	12/18/2022 - 12/24/2022	1.01	1.04
53	12/25/2022 - 12/31/2022	1.03	1.06

* PEAK SEASON

23-FEB-2023 09:11:21

830UPD

4_8601_PKSEASON.TXT

P&Z

PZ23-12000017

06-25-2025

Exhibit 3

This Page Intentionally Left Blank

TABLE 7

Generalized **Peak Hour Directional** Volumes for Florida's
Urbanized Areas

January 2020

INTERRUPTED FLOW FACILITIES						UNINTERRUPTED FLOW FACILITIES					
STATE SIGNALIZED ARTERIALS						FREEWAYS					
Class I (40 mph or higher posted speed limit)						Core Urbanized					
Lanes	Median	B	C	D	E	Lanes	B	C	D	E	
1	Undivided	*	830	880	**	2	2,230	3,100	3,740	4,080	
2	Divided	*	1,910	2,000	**	3	3,280	4,570	5,620	6,130	
3	Divided	*	2,940	3,020	**	4	4,310	6,030	7,490	8,170	
4	Divided	*	3,970	4,040	**	5	5,390	7,430	9,370	10,220	
						6	6,380	8,990	11,510	12,760	
Class II (35 mph or slower posted speed limit)						Urbanized					
Lanes	Median	B	C	D	E	Lanes	B	C	D	E	
1	Undivided	*	370	750	800	2	2,270	3,100	3,890	4,230	
2	Divided	*	730	1,630	1,700	3	3,410	4,650	5,780	6,340	
3	Divided	*	1,170	2,520	2,560	4	4,550	6,200	7,680	8,460	
4	Divided	*	1,610	3,390	3,420	5	5,690	7,760	9,520	10,570	
Non-State Signalized Roadway Adjustments						Freeway Adjustments					
(Alter corresponding state volumes by the indicated percent.)						Auxiliary Lane Ramp Metering					
Non-State Signalized Roadways - 10%						+ 1,000 + 5%					
Median & Turn Lane Adjustments						UNINTERRUPTED FLOW HIGHWAYS					
Lanes	Median	Exclusive Left Lanes	Exclusive Right Lanes	Adjustment Factors		Lanes	Median	B	C	D	E
1	Divided	Yes	No	+5%		1	Undivided	580	890	1,200	1,610
1	Undivided	No	No	-20%		2	Divided	1,800	2,600	3,280	3,730
Multi	Undivided	Yes	No	-5%		3	Divided	2,700	3,900	4,920	5,600
Multi	Undivided	No	No	-25%							
—	—	—	Yes	+5%							
One-Way Facility Adjustment						Uninterrupted Flow Highway Adjustments					
Multiply the corresponding directional volumes in this table by 1.2						Lanes	Median	Exclusive left lanes	Adjustment factors		
						1	Divided	Yes	+5%		
						Multi	Undivided	Yes	-5%		
						Multi	Undivided	No	-25%		
BICYCLE MODE ²						¹ Values shown are presented as peak hour directional volumes for levels of service and are for the automobile/truck modes unless specifically stated. This table does not constitute a standard and should be used only for general planning applications. The computer models from which this table is derived should be used for more specific planning applications. The table and deriving computer models should not be used for corridor or intersection design, where more refined techniques exist. Calculations are based on planning applications of the HCM and the Transit Capacity and Quality of Service Manual. ² Level of service for the bicycle and pedestrian modes in this table is based on number of vehicles, not number of bicyclists or pedestrians using the facility. ³ Buses per hour shown are only for the peak hour in the single direction of the higher traffic flow. * Cannot be achieved using table input value defaults. ** Not applicable for that level of service letter grade. For the automobile mode, volumes greater than level of service D become F because intersection capacities have been reached. For the bicycle mode, the level of service letter grade (including F) is not achievable because there is no maximum vehicle volume threshold using table input value defaults. Source: Florida Department of Transportation Systems Implementation Office https://www.fdot.gov/planning/systems/					
(Multiply vehicle volumes shown below by number of directional roadway lanes to determine two-way maximum service volumes.)											
Paved Shoulder/Bicycle											
Lane Coverage	B	C	D	E							
0-49%	*	150	390	1,000							
50-84%	110	340	1,000	>1,000							
85-100%	470	1,000	>1,000	**							
PEDESTRIAN MODE ²											
(Multiply vehicle volumes shown below by number of directional roadway lanes to determine two-way maximum service volumes.)											
Sidewalk Coverage	B	C	D	E							
0-49%	*	*	140	480							
50-84%	*	80	440	800							
85-100%	200	540	880	>1,000							
BUS MODE (Scheduled Fixed Route) ³											
(Buses in peak hour in peak direction)											
Sidewalk Coverage	B	C	D	E							
0-84%	> 5	≥ 4	≥ 3	≥ 2							
85-100%	> 4	≥ 3	≥ 2	≥ 1							

This Page Intentionally Left Blank

SF reduction in the size of the clubhouse (current = 37,504 SF and proposed = 7,162 SF.) This is a significant reduction in size (81% smaller) that should be mentioned and does not match the Clubhouse SF noted on the tabular data on site plan. Please include in the narrative if the existing Clubhouse contains a restaurant and the net change in size of that facility with this project. You may want to mention what is being eliminated from the existing, much larger, clubhouse facility.

Traffic Study Comments:

(1) This is not presented in a manner that is understandable or reassuring to the public. The conclusion that "As shown in this analysis, both Oaks Clubhouse Drive and W Palm Aire Drive currently operate at LOS 'C' and will continue to operate at LOS 'C' after the Oaks at Palm Aire project is fully built." should be right after the tables showing the V/C ratio and a column should be added to that table for the LOS standard the V/C ratio represents.

(2) A further explanation of the traffic counts, when they were taken and how and what those numbers mean to the lay person would be a good addition to the study.

(3) The average daily and AM/PM peak hour tables are not clear. The reduction in trips from the previous Clubhouse due to its smaller size and whether or not the proposed restaurant reduces the trip reduction of the smaller Clubhouse should be presented in the analysis even if it is not included in the traffic impact as it's likely that clubhouse was not fully utilized and generating more traffic than expected from the newer facility.

(3) The Daily Traffic total should be shown in Table 1 not Table 2.

(4) Table 2 should have the peak hour trip generation rates (0.37 per unit AM and 0.39 per unit PM) with the total math before the In/Out split. Without that, you can't back out the math.

ZONING

Plan Reviewer: Pamela Stanton

Review Status: Review Complete pending Development Order

1. See site plan submittal PZ 23-12000017 for all site plan comments.

2. No objection to the allocation of Flex units.

LANDSCAPE

Plan Reviewer: Wade Collum

Review Status: Review Complete pending Development Order

Comments will be rendered on the landscape plans provided with the site plan submittal (23-12000017).

WASTE MANAGEMENT

Environmental Services Comments

Project Name: Oaks Clubhouse Redevelopment FLEX

Address: 103 Oaks Clubhouse Drive

P&Z#: 23-05000007

Review: 06/30/2023

DRC Meeting: 07/19/2023

REVIEW COMPLETE; NO OBJECTION TO FLEX APPLICATION

The Environmental Services Department has no objections to the proposed flex request. The site plan submitted with this application appears to have multiple issues with regard to garbage collection.

NOTE: Additional comments may be necessary based upon revisions, additional plans and/or documents.

P&Z

DEVELOPMENT REVIEW COMMITTEE
Meeting Date: SEPTEMBER 20, 2023
THE OAKS AT PALM AIRE - FLEX
Request: Flex
P&Z# 23-05000007

Traffic Study Comments:

(4) This is not presented in a manner that is understandable or reassuring to the public. The conclusion that "As shown in this analysis, both Oaks Clubhouse Drive and W Palm Aire Drive currently operate at LOS 'C' and will continue to operate at LOS 'C' after the Oaks at Palm Aire project is fully built." should be right after the tables showing the V/C ratio and a column should be added to that table for the LOS standard the V/C ratio represents.

[JFO->] Traffic Impact Analysis has been revised accordingly.

(5) A further explanation of the traffic counts, when they were taken and how and what those numbers mean to the lay person would be a good addition to the study.

[JFO->] Traffic Impact Analysis has been revised accordingly.

(6) The average daily and AM/PM peak hour tables are not clear. The reduction in trips from the previous Clubhouse due to its smaller size and whether or not the proposed restaurant reduces the trip reduction of the smaller Clubhouse should be presented in the analysis even if it is not included in the traffic impact as it's likely that clubhouse was not fully utilized and generating more traffic than expected from the newer facility.

[JFO->] According to the 11th Edition (latest) of the Trip Generation Manual from the Institute of Transportation Engineers, Clubhouse is not a Land Use associated with a trip generation rate/equation. Clubhouses are considered accessory uses associated to Golf Courses where trip generation rates/equations for golf courses are calculated based on the number of holes or the number of acres associated with the golf course. Therefore, for trip generation purposes and according to the latest ITE Trip Generation manual, the size of the clubhouse does not change the number of trips associated with the golf course. Consequently, for simplification purposes, as part of a conservative analysis and to make it easier to understand, the traffic analysis assumes that having a smaller club house will not generate less trips. Exhibit 2 includes a copy of the ITE trip generation rates/equations for Golf Courses showing that trip generation for golf courses is calculated based on number of holes or acreage and not based on the size of the clubhouse.

(7) The Daily Traffic total should be shown in Table 1 not Table 2.

[JFO->] The Daily Traffic total is not shown in Table 1, it is shown in Table 2. Table 1 shows Daily, AM and PM trip generation rates from the latest edition (11th Edition) of the trip generation manual from the Institute of Transportation Engineers used to calculate the trip generation of the proposed development. Table 2 shows the net Daily, AM and PM peak trips potentially generated due to the proposed development.

(8) Table 2 should have the peak hour trip generation rates (0.37 per unit AM and 0.39 per unit PM) with the total math before the In/Out split. Without that, you can't back out the math.

[JFO->] Traffic Impact Analysis has been revised accordingly to show the total peak hour traffic before the In/Out split and to show the math calculating the number of trips potentially generated by the proposed project.

P&Z