

BUILDING A
137,534 SF
F.F.E.: 14.00


BUILDING B
177,806 SF
F.F.E.: 14.00

INSTALL DOUBLE FILTER FABRIC MATERIAL IN EXIST. AND PROP. CATCH BASIN IN ACCORDANCE WITH FLORIDA STORMWATER EROSION & SEDIMENTATION CONTROL INSPECTOR'S MANUAL (TYP.)

-INSTALL DOUBLE FILTER FABRIC MATERIAL IN
EXIST. AND PROP. CATCH BASIN IN
ACCORDANCE WITH FLORIDA STORMWATER
EROSION & SEDIMENTATION CONTROL
INSPECTOR'S MANUAL (TYP.)


—INSTALL SILT FENCE IN ACCORDANCE WITH FLORIDA STORMWATER EROSION & SEDIMENTATION CONTROL INSPECTOR'S MANUAL (TYP.)

INSTALL SOIL TRACKING PREVENTION
DEVICE IN ACCORDANCE WITH
FLORIDA STORMWATER EROSION &
SEDIMENTATION CONTROL
INSPECTOR'S MANUAL



GRAPHIC SCALE

NOTE: PRINTED DRAWING SIZE
MAY HAVE CHANGED FROM
ORIGINAL. VERIFY SCALE USING
BAR SCALE ABOVE.

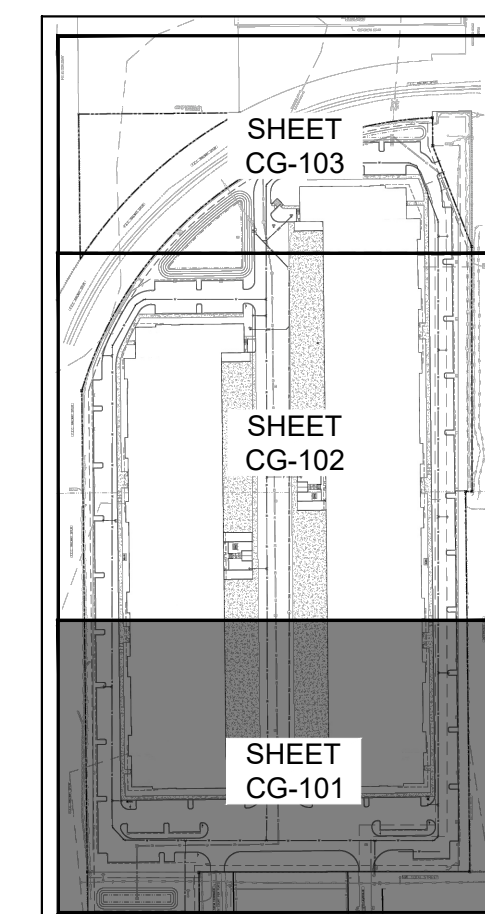

KEY MAP

N.T.S.

GENERAL NOTES:

1. THE CONTRACTOR SHALL INSTALL AND MAINTAIN EROSION CONTROL AND SEDIMENTATION CONTROL MEASURES IN ACCORDANCE WITH THE STANDARDS FOR SOIL EROSION AND SEDIMENT CONTROL IN FLORIDA (HEREAFTER REFERRED TO AS FL GUIDELINES).
2. MAINTENANCE MEASURES SHALL BE APPLIED AS NEEDED DURING THE ENTIRE CONSTRUCTION PERIOD. AFTER EACH RAINFALL, A VISUAL INSPECTION SHALL BE MADE OF ALL INSTALLED EROSION CONTROL MEASURES AND REPAIRS SHALL BE CONDUCTED TO ENSURE THEIR CONTINUING FUNCTION AS DESIGNED.
3. ALL EXISTING/NEW CATCH BASIN, INLETS, STORM SEWER MANHOLES STRUCTURES WITHIN THE WORK AREAS, ETC. SHALL BE PROTECTED DURING CONSTRUCTION OPERATIONS FROM SEDIMENT RUNOFF AND DEBRIS BY PLACING A FILTER FABRIC MATERIAL IN THE FRAME AND GRATE/MANHOLE COVER. PREVENTIVE METHODS MUST BE UTILIZED AROUND THESE STRUCTURES (DURING CONSTRUCTION OPERATIONS) BY GRADING TO DRAIN AWAY FROM STRUCTURES AND ANY OTHER METHODS APPROVED BY THE AGENCY HAVING JURISDICTION OR DESIGN ENGINEER OF RECORD.
4. THE CONTRACTOR SHALL INSTALL A SOIL TRACKING PREVENTION DEVICE AS PER THE FLORIDA STORMWATER EROSION AND SEDIMENTATION CONTROL INSPECTOR'S MANUAL. THE CONTRACTOR SHALL TAKE MEASURES TO INSURE THE CLEANUP OF SEDIMENTS THAT HAVE BEEN TRACKED BY VEHICLES OR HAVE BEEN TRANSPORTED BY WIND OR STORM WATER ABOUT THE SITE OR ONTO NEARBY ROADWAYS. STABILIZED CONSTRUCTION ENTRANCES AND CONSTRUCTION ROADS, IF APPROPRIATE, SHALL BE IMPLEMENTED IN ORDER TO REDUCE OFFSITE TRACKING.
5. ALL AREAS OF DISTURBANCE THAT ARE NOT WITHIN BUILDING OR PAVEMENT LIMITS SHALL BE SODDED, REFER TO LANDSCAPE PLANS FOR SOD SPECIFICATION AND REQUIREMENTS.
6. REMOVE ALL EROSION CONTROL IMPROVEMENTS AFTER ALL DISTURBED AREAS ARE STABILIZED WITH THE FINAL GROUND COVER.
7. THE CONTRACTOR SHALL BE RESPONSIBLE FOR READING AND FAMILIARIZING THEMSELVES WITH ALL THE PERMITS PREVIOUSLY ACQUIRED FOR THIS PROJECT. THE CONDITIONS OUTLINED IN THE PERMITS ARE IN FORCE AND FULL EFFECT AS PART OF THE PROPOSED IMPROVEMENTS. THE CONTRACTOR IS RESPONSIBLE FOR ENSURING ALL WORK ASSOCIATED WITH THIS PROJECT IS IN COMPLIANCE WITH ALL OF THE REQUIREMENTS OF THESE PERMITS.
8. THE CONTRACTOR WILL BE RESPONSIBLE FOR ACQUIRING A VALID NPDES PERMIT. UNLESS SUCH PERMIT IS DETERMINED TO BE NON-APPLICABLE BY REGULATORY AGENCY HAVING PROPER JURISDICTION REGARDING THIS MATTER.



**301 East Atlantic Blvd.
Pompano Beach, FL 33060
PH: (954) 788-3400**

Florida Engineering Business License: CA7928
Florida Surveyor and Mapper Business License: LB686
Florida Landscape Architectural Business License: LC600

REVISIONS

[illegible]

RESPONSIBILITY FOR THE USE OF THESE
PLANS PRIOR TO OBTAINING PERMITS FROM
ALL AGENCIES HAVING JURISDICTION OVER
THE PROJECT WILL FALL SOLELY UPON THE
USER.

ISSUE DATE:	08/27/2025
-------------	------------

DESIGNED BY: BE

DRAWN BY: JS

CHECKED BY: NW

BID-CONTRACT:	
----------------------	--

THOMAS F. DONAHUE, P.E.
FLORIDA REG. NO. 60529
(FOR THE FIRM)

CLIENT

**FIRST
INDUSTRIAL**

PROJECT

**FIRST 95 DISTRIBUTION
CENTER- PHASE II
1000-1041 NW 12th Ter.
Pompano Beach, FL**

SHEET TITLE

EROSION CONTROL PLAN

RC **CG-101**
PROJECT NUMBER 10607.14

PZ25-12000030

10/01/2025

STATUS: PRELIMINARY