DRC
PZ26-12000001
04/01/2026

DRC
PZ26-12000001
05/20/2026

MATCH LINE: REF. SHEET LI-101

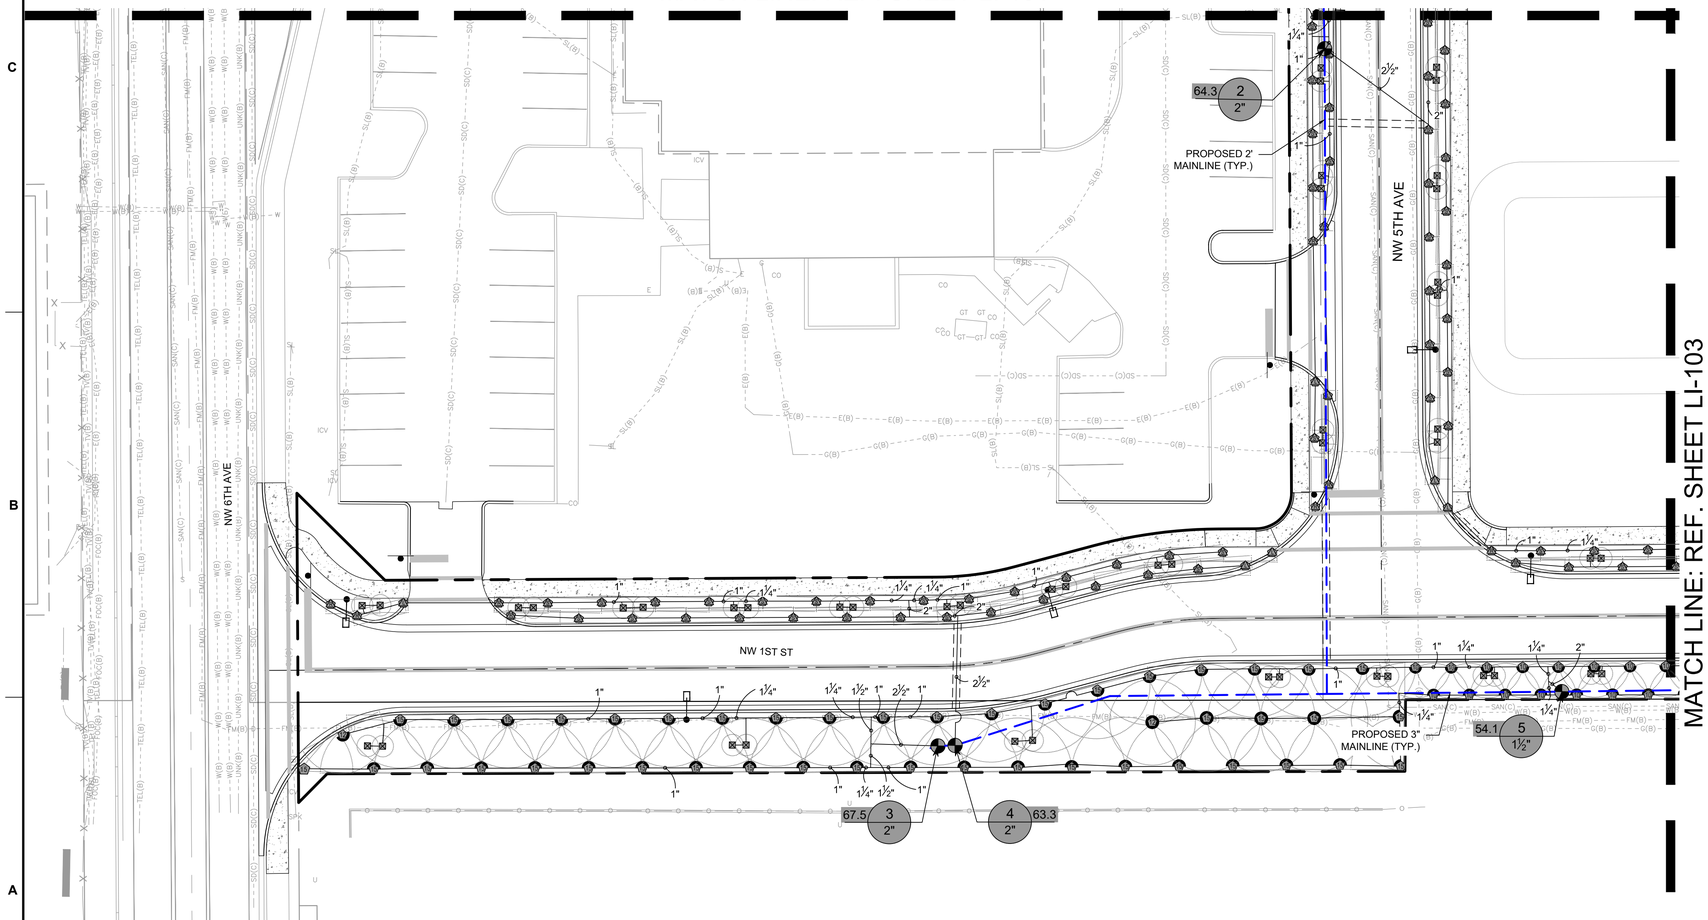

MATCH LINE: REF. SHEET LI-103

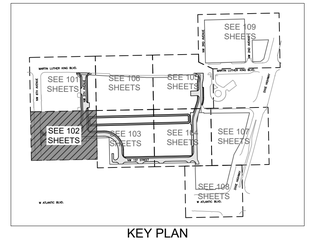

KEY PLAN

NOTES:

1. ALL SOD AND LANDSCAPE TO RECEIVE 100% COVERAGE WITH 50% OVERLAP FROM AN AUTOMATIC IRRIGATION SYSTEM USING AN APPROVED WATER SOURCE.
2. A RAIN SENSOR MUST BE INSTALLED TO OVER-RIDE THE CONTROLLER.
3. BUBBLERS TO BE PROVIDED FOR NEW AND RELOCATED TREES AND PALMS.
4. CONTRACTOR IS RESPONSIBLE FOR ALL CONDITIONS AND IRRIGATION SPECIFICATION ATTACHED TO THIS PLAN. PLAN AND SPECIFICATIONS SHALL BE CONSIDERED CONTRACT DOCUMENTS.
5. INVESTIGATE TO DETERMINE AND VERIFY THE LOCATION OF UNDERGROUND UTILITIES BEFORE EXCAVATION.
6. REFER TO SHEET LI-501 FOR ADDITIONAL IRRIGATION SPECIFICATIONS AND DETAILS.
7. NOZZLE SELECTION BASED ON COVERAGE REQUIREMENTS.

IRRIGATION SCHEDULE

SYMBOL	MANUFACTURER/MODEL/DESCRIPTION	PSI
EST LCS RCS CST SST	RAIN BIRD 1806-PRS 15 STRIP SERIES SHRUB SPRAY 6IN. POP-UP SPRINKLER WITH CO-MOLDED WIPER SEAL. SIDE AND BOTTOM INLET. 1/2IN. NPT FEMALE THREADED INLET. WITH PRESSURE REGULATING DEVICE.	30
Q T H F	RAIN BIRD 1806-PRS 8 SERIES MPR SHRUB SPRAY 6IN. POP-UP SPRINKLER WITH CO-MOLDED WIPER SEAL. SIDE AND BOTTOM INLET. 1/2IN. NPT FEMALE THREADED INLET. WITH PRESSURE REGULATING DEVICE.	30
Q T H F	RAIN BIRD 1806-PRS 10 SERIES MPR SHRUB SPRAY 6IN. POP-UP SPRINKLER WITH CO-MOLDED WIPER SEAL. SIDE AND BOTTOM INLET. 1/2IN. NPT FEMALE THREADED INLET. WITH PRESSURE REGULATING DEVICE.	30
Q T H TQ F	RAIN BIRD 1806-PRS 12 SERIES MPR SHRUB SPRAY 6IN. POP-UP SPRINKLER WITH CO-MOLDED WIPER SEAL. SIDE AND BOTTOM INLET. 1/2IN. NPT FEMALE THREADED INLET. WITH PRESSURE REGULATING DEVICE.	30
Q T H TQ F	RAIN BIRD 1806-PRS 15 SERIES MPR SHRUB SPRAY 6IN. POP-UP SPRINKLER WITH CO-MOLDED WIPER SEAL. SIDE AND BOTTOM INLET. 1/2IN. NPT FEMALE THREADED INLET. WITH PRESSURE REGULATING DEVICE.	30
4 6 8 10 12 15 18	RAIN BIRD 1806-PRS ADJ SHRUB SPRAY 6IN. POP-UP SPRINKLER WITH CO-MOLDED WIPER SEAL. SIDE AND BOTTOM INLET. 1/2IN. NPT FEMALE THREADED INLET. WITH PRESSURE REGULATING DEVICE.	30
360	RAIN BIRD 1800-1300AF FLOOD ADJUSTABLE FLOW 1.0 GPM - 2.3 GPM, FULL CIRCLE BUBBLER, 1/2IN. FIPT INLET.	30
SYMBOL	MANUFACTURER/MODEL/DESCRIPTION	
	RAIN BIRD PEB 1IN., 1-1/2IN., 2IN., 3IN. PLASTIC INDUSTRIAL REMOTE CONTROL VALVE. LOW FLOW OPERATING CAPABILITY, GLOBE CONFIGURATION.	
POC 1"	POINT OF CONNECTION 2"	
	IRRIGATION LATERAL LINE: PVC CLASS 160 SDR 26 SYSTEM PIPE SIZE 3/4" SHALL BE CLASS 200 PVC; SYSTEM PIPE SIZE 1" OR GREATER SHALL BE CLASS 160 PVC.	
	IRRIGATION MAINLINE: PVC SCHEDULE 40	
	PIPE SLEEVE: PVC SCHEDULE 40	





NOTE: PRINTED DRAWING SIZE MAY HAVE CHANGED FROM ORIGINAL. VERIFY SCALE USING BAR SCALE ABOVE.

KEITH
2200 West Atlantic Blvd.
Pompano Beach, FL 33060
PH: (954) 788-3400
Florida Engineering Business License: CA7928
Florida Surveyor and Mapper Business License: LB6860
Florida Landscape Architecture Business License: LC26000457

REVISIONS

NO.	DESCRIPTION	DATE

PRELIMINARY PLAN NOT FOR CONSTRUCTION

THESE PLANS ARE NOT FULLY PERMITTED AND ARE SUBJECT TO REVISIONS MADE DURING THE PERMITTING PROCESS.

RESPONSIBILITY FOR THE USE OF THESE PLANS PRIOR TO OBTAINING PERMITS FROM ALL AGENCIES HAVING JURISDICTION OVER THE PROJECT WILL FALL SOLELY UPON THE USER.

ISSUE DATE:	02/25/2026
DESIGNED BY:	SL, KU
DRAWN BY:	KU, EZ
CHECKED BY:	SL, KU
BID-CONTRACT:	

This item has been digitally signed and sealed by Paul H. Weinberg, on the date below using a Digital Signature

REGISTERED LANDSCAPE ARCHITECT PAUL H. WEINBERG LA 6666804 STATE OF FLORIDA

Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

Date: 2026.02.25 14:15:49-05'00'

PAUL H. WEINBERG, PLA
FLORIDA REG. NO. LA6666804
(FOR THE FIRM)

CLIENT

RP POMPANO LLC

PROJECT

DOWNTOWN POMPANO

SHEET TITLE

IRRIGATION PLAN

SHEET NUMBER	LI-102
PROJECT NUMBER	15083.00

STATUS: PRELIMINARY

Plotted by: slanducci On: 2/25/2026 2:12 PM

Drawing name: H:\15083.00 - Downtown Pompano - RP Development LLC\Landscape Architecture\CAD\15083.00-LI-1XX.dwg