




# STORMWATER POLLUTION PREVENTION PLAN

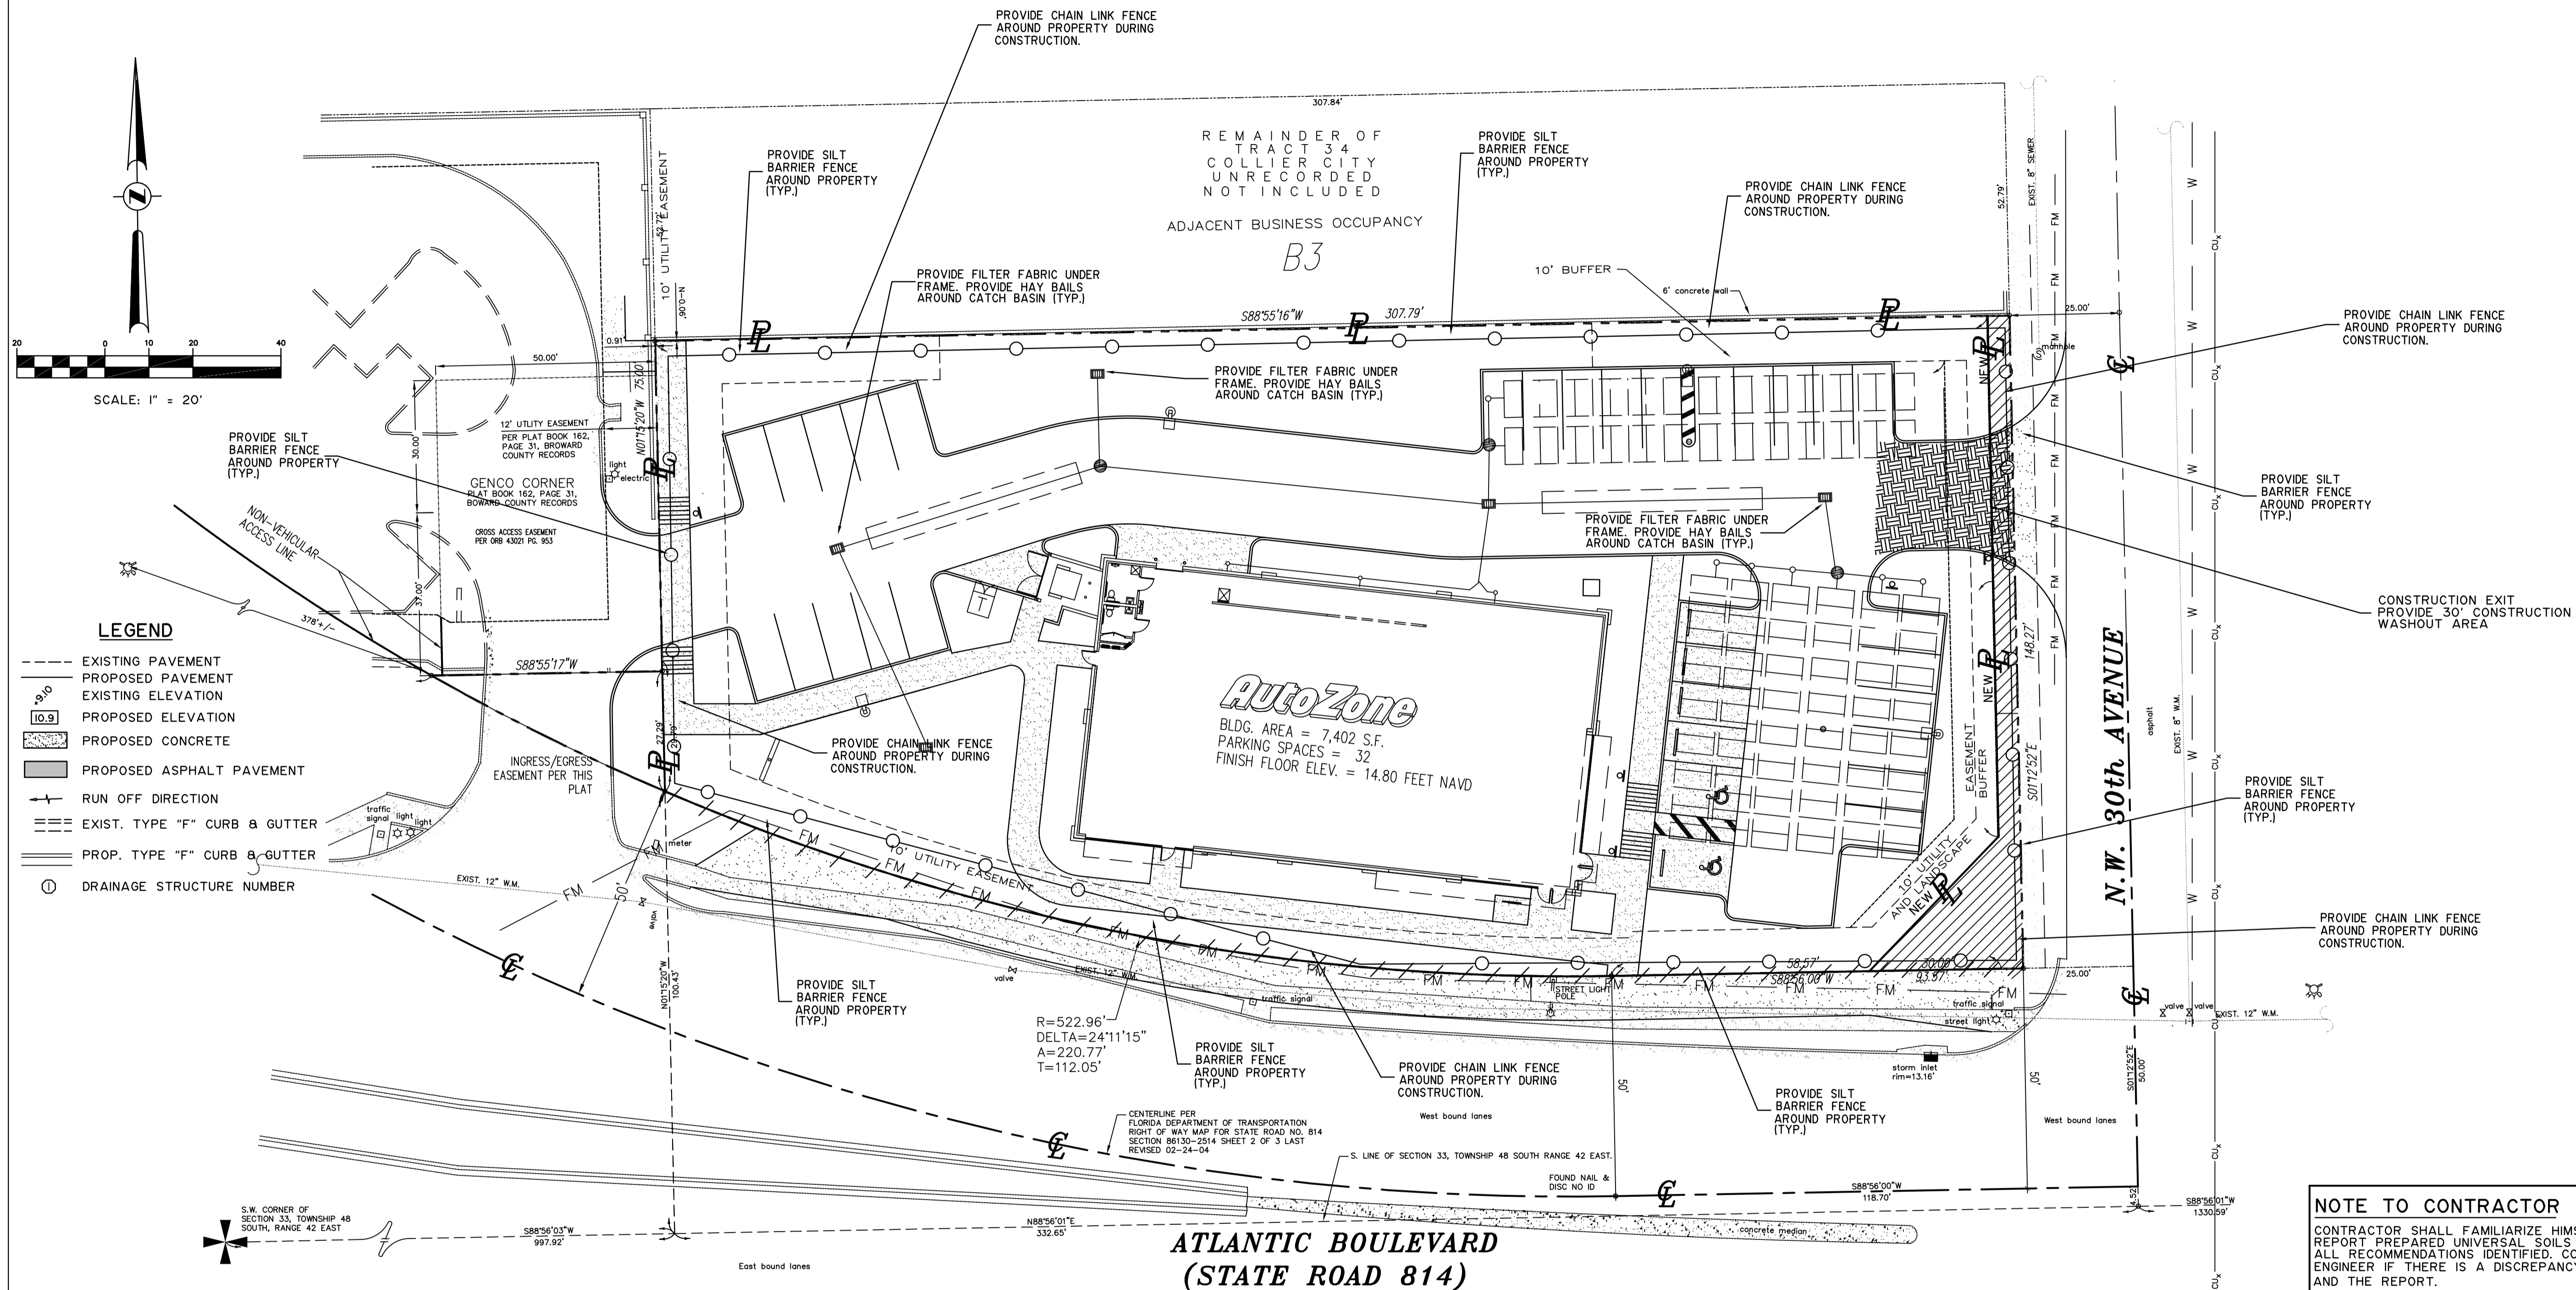

## STORMWATER POLLUTION PREVENTION PRACTICES: NPDES


1. TREE PROTECTION AND PRUNING SHALL BE ACCOMPLISHED AS DETAILED IN LANDSCAPE PLANS AND AS PER CURRENT LANDSCAPE ORDINANCE.
2. THE STORMWATER POLLUTION PREVENTION PLAN, SWPPP, SUBMITTED TO PUBLIC WORKS, SHALL DESCRIBE IN DETAIL HOW THE CONSTRUCTION EFFORT WILL BE PHASED WITH REGARDS TO MINIMIZING EROSION PROBLEMS BY THE USE OF TEMPORARY AND PERMANENT EROSION CONTROL MEASURES, FOR THE VARIOUS SEQUENCES OF CONSTRUCTION OPERATIONS. ANY MODIFICATIONS MUST BE APPROVED BY THE CITY OF POMPAHO BEACH-NPDES SECTION, DEPARTMENT OF PUBLIC WORKS.
3. ENVIRONMENTAL CONTROL FEATURES AS PROVIDED IN THE SWPP, ARE TO BE INSTALLED AT ALL AREAS OF EXCAVATION OR FILL FOR DRAINAGE SYSTEM, OR STRUCTURE CONSTRUCTION PRIOR TO SUCH EXCAVATION OR FILL. INLET ENTRANCES ARE ALSO TO BE PROTECTED FROM SILTATION
4. ALL ENVIROMENTAL CONTROL FEATURES ARE TO BE MAINTAINED THROUGHOUT THE LIFE OF THE PROJECT IN ACCORDANCE WITH N.P.D.E.S. REQUIREMENTS. THE CONTRACTOR MUST INSURE THAT ALL EROSION CONTROL FEATURES FUNCTION PROPERLY AT ALL TIMES.
5. ALL EROSION AND MATERIAL DEPOSITS MUST BE CONTAINED WITHIN THE PROJECT LIMITS.
6. ANY DAMAGED OR INEFFECTIVE ROCK BAGS ARE TO BE REPLACED WITH NEW ONES. THE LOCATION OF ROCK BAGS INSTALLATION IS AS MENTIONED IN THE SWPP PLANS. THE PROJCT ENGINEER MAY SPECIFY OTHER AREAS AS NECESSARY.
7. DITCH BOTTOM INLETS SHALL BE PROTECTED FROM SEDIMENT INTAKE UNTIL PROJECT IS COMPLETE. ELEVATION OF GROUND OUTSIDE INLET TOP SHALL NOT BE HIGHER THAN INLET TOP. ROCK BAGS SHALL BE INSTALLED AROUND INLET TOP. COMPLETED INLETS IN PAVED AREAS SHALL ALSO BE PROTECTED WITH ROCK BAGS TO PREVENT SEDIMENT INTAKE.
8. CURB INLETS ALSO SHALL BE PROTECTED FROM SEDIMENT INTAKE UNTIL THE PROJECT IS COMPLETE. ALL EXPOSED SLOPED MATERIAL ADJACENT TO INLET, SHALL BE COVERED WITH EROSION CONTROL MATTING WITH OUTER LIMITS PROTECTED BY ROCK BAGS.
9. STOCKPILED MATERIAL SHALL NOT BE LEFT IN EROSION PRONE AREAS UNLESS PROTECTED BY COVER OR ROCK BAGS.
10. INSPECTION OF EROSION CONTROL MEASURES AND CONDITION OF ADJACENT PROPERTIES, SHALL BE PERFORMED DAILY BY THE CONTRACTOR'S REPRESENTATIVE AND THE PROJECT ENGINEER. DEFICIENCIES SHALL BE NOTED AND CORRECTED.
11. ANY OFFSITE SEDIMENT DISCHARGE TO A MUNICIPAL SEPARATE STORM WATER SYSTEM ARISING FROM THE CONTRACTOR'S ACTIVITIES IS NOT ALLOWED.
12. THE USE OF SANITARY SEWERS, FRENCH DRAINS, OR DITCHES FOR ROCK DRAINS FOR THE DISPOSAL OF WASTEWATER IS EXPRESSLY PROHIBITED.

## NOTE TO CONTRACTOR

CONTRACTOR SHALL FAMILIARIZE HIMSELF WITH THE SOILS REPORT PREPARED UNIVERSAL SOILS AND SHALL IMPLEMENT ALL RECOMMENDATIONS IDENTIFIED. CONTRACTOR TO NOTIFY ENGINEER IF THERE IS A DISCREPANCY BETWEEN THE PLANS AND THE REPORT.

## UNDERGROUND CONTRACTOR:

- A. Underground Contractor shall comply with the Trench Safety Act, HB 3183, Florida Statutes, which incorporates, but is not limited to, the following:
  1. OSHA Standard 29 C.F.R. Part 1926, Subpart P, Excavation and Trenches.
  2. Contract bids for trench excavations (in excess of 5 feet deep) shall include reference to the safety standards, written assurance of compliance, and a separate item identifying the cost of compliance.
  3. Adhere to any special shoring requirements of the state or other political subdivision.
- B. Engineer is not responsible for the safety of the excavation or design and construction of any shoring.

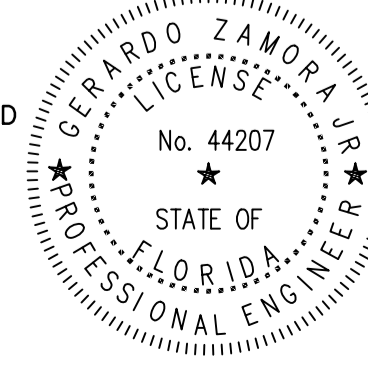


Gerardo Zamora  
PROJECT No. 2015-14  
DATE: 4/5/2017

Gerardo Zamora  
P.E. No. 44207  
E.B. 0006791  
STATE OF FLORIDA

**ZAMORA & ASSOCIATES, INC.**  
ENGINEERING LAND PLANNING  
11410 N. KENDALL DRIVE SUITE 302 MIAMI, FLORIDA 33176  
(305) 273-7801 FAX (305) 273-9514

OWNER:  
**AutoZone, Inc.**  
123 S. FRONT STREET, 3rd FLOOR  
MEMPHIS, TENNESSEE 38103

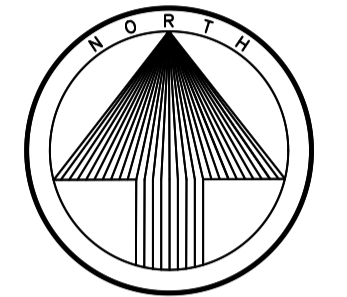

PREPARED FOR: **AutoZone** STORE DEVELOPMENT

Store No.: 6385  
3001 W. Atlantic Avenue  
Pompano Beach, FL 33069

## STORMWATER EROSION CONTROL PLAN

SCALE: 1" = 20'-0"

## REVISIONS

- | NO. | REVISION            |
|-----|---------------------|
| 1.  | 1/5/18 COORDINATION |
| 2.  |                     |
| 3.  |                     |
| 4.  |                     |
| 5.  |                     |
| 6.  |                     |
| 7.  |                     |

ARCHITECT:

DRAFTSMAN: CEH

CHECKED BY:

DATE: 11/17/15  
PROTOTYPE SIZE

**AAC**  
PZ20-12000007  
2/2/21

**AAC**  
PZ20-12000007  
03/03/2020