


- NOTES TO OWNER AND/OR CONTRACTOR:
1. THE CITY AND THE STATE HAVE AN OBLIGATION CONCERNING EROSION AND SEDIMENT CONTROL ON CONSTRUCTION SITES. ALL PROPOSED CONSTRUCTION SITES ARE REQUIRED TO SUBMIT AN EROSION AND SEDIMENTATION CONTROL/SWPPP PLAN INCORPORATING EROSION MANAGEMENT PRACTICES (EMP) WHEN FILING A BUILDING PERMIT. ALL SITES MAY BE PERIODICALLY INSPECTED BY THE CITY AND/OR STATE AND IF BMP ARE NOT IN PLACE, FINES WILL BE IMPOSED UPON THE OWNER AND/OR CONTRACTOR.
 2. A. TO AVOID PATCH BASIN/MANHOLE (M.H.), PLACE FILTER FABRIC BETWEEN GRATE/M.H. COVER AND FRAME TO PREVENT SEDIMENT ENTERING THE DRAINAGE SYSTEM.
 3. THE MINIMUM BMP SHOWN ON THIS SHEET MAY NEED TO BE MODIFIED AND/OR INCREASED BY THE OWNER/CONTRACTOR TO COMPLY WITH CITY AND/OR STATE REQUIREMENTS. THE OWNER AND/OR CONTRACTOR SHALL TAKE ANY ACTION NECESSARY TO PREVENT ANY SEDIMENTATION RUNOFF OFF SITE.
 4. THE OWNER AND/OR CONTRACTOR SHALL BE RESPONSIBLE FOR THE DAY TO DAY MANAGEMENT OF THE BMP FOR THIS PROJECT.
 5. THERE ARE SIGNIFICANT PENALTIES FOR NOT IMPLEMENTING A SWPPP AND/OR SUBMITTING FALSE INFORMATION, INCLUDING THE POSSIBILITY OF FINE AND IMPRISONMENT FOR KNOWING VIOLATIONS.
 6. TOP WAYS FOR THE OWNER AND/OR CONTRACTOR TO AVOID NPDES PHASE II FINES FROM THE FDP:
 - A. SUBMIT A NOTICE OF INTENT TO THE FDP BEFORE STARTING WORK.
 - B. OBTAIN AN NPDES PERMIT FROM THE FDP BEFORE STARTING WORK.
 - C. PREPARE A STORM WATER POLLUTION PREVENTION PLAN (SWPPP) BEFORE STARTING WORK.
 - D. KEEP A SIGNED COPY OF YOUR SWPPP ON SITE AND UPDATE IT REGULARLY.
 - E. IMPLEMENT ALL PARTS OF YOUR SWPPP THROUGHOUT THE PROJECT.
 - F. PROPERLY TRAIN ALL INVOLVED CONTRACTORS.
 - G. CORRECTLY INSTALL AND MAINTAIN BEST MANAGEMENT PRACTICES.
 - H. INSPECTIONS AND INSPECTION REPORTS MUST OCCUR AT LEAST ONCE A WEEK AND WITHIN 24 HOURS OF THE END OF A STORM EVENT THAT IS 0.50 INCHES OR GREATER.
 - I. PERFORM TIMELY INSPECTIONS AND CORRECT PROBLEMS WITHIN 24 HOURS.
 - J. MAINTAIN COMPLETE RECORDS OF ALL SWPPP ACTIVITIES.
 - K. NEVER DISCHARGE SEDIMENT AND/OR MUDDY WATER OR OTHER POLLUTANTS FROM THE SITE.
 7. RE-APPLY FOR COVERAGE EVERY FIVE YEARS. IF THE PERIOD OF CONSTRUCTION ACTIVITY EXTENDS BEYOND A 5-YEAR PERIOD, AN N.O.T. (NOTICE OF TERMINATION) TO THE FDP TO TERMINATE COVERAGE.
 8. RETENTION OF RECORDS:
 - A. THE PERMITTEE SHALL RETAIN COPIES OF STORMWATER POLLUTION PREVENTION PLANS AND ALL REPORTS REQUIRED BY THIS PERMIT AND RECORDS OF DATA USED TO COMPLETE A NOTICE OF INTENT TO BE COVERED BY THIS PERMIT, FOR A PERIOD OF AT LEAST THREE YEARS FROM THE DATE THAT THE SITE IS FINALLY STABILIZED. THIS PERIOD MAY BE EXTENDED BY REQUEST OF THE FDP AT ANY TIME.
 - B. THE PERMITTEE SHALL RETAIN A COPY OF THE STORMWATER POLLUTION PREVENTION PLAN REQUIRED BY THIS PERMIT AT THE CONSTRUCTION SITE FROM THE DATE OF PROJECT INITIATION TO THE DATE OF FINAL STABILIZATION.

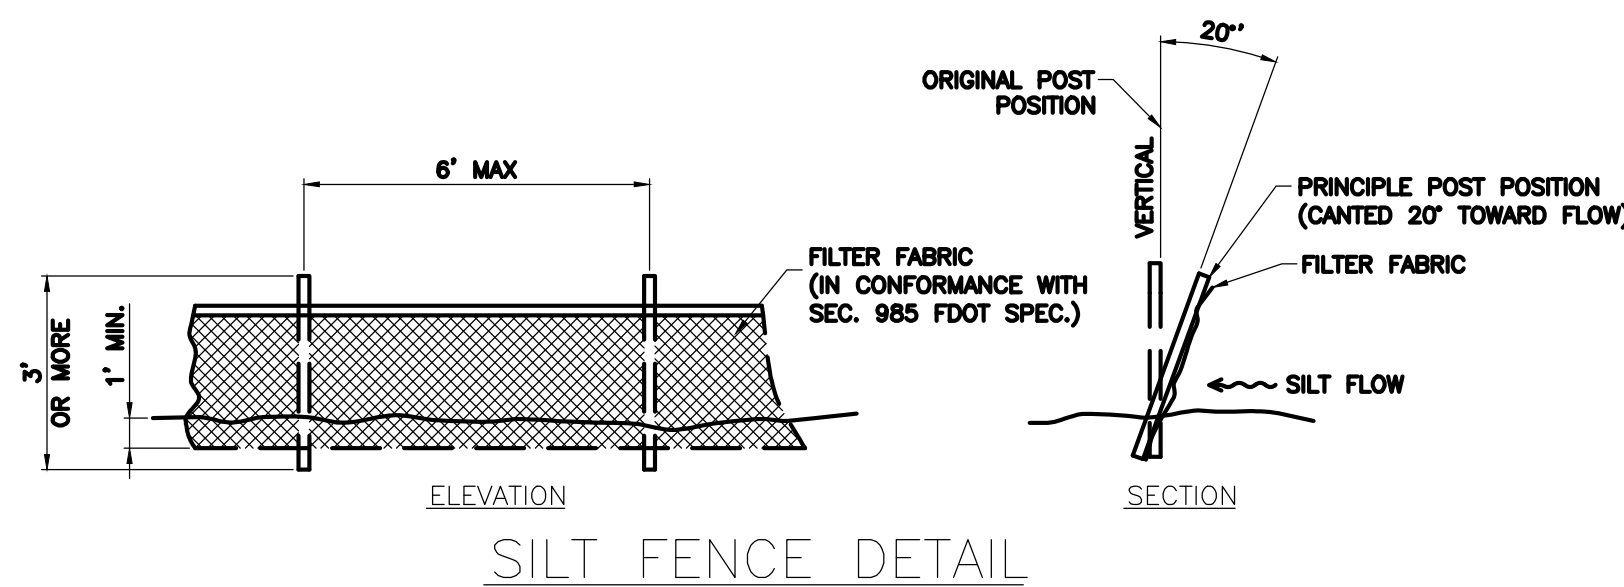

CHAPTER 4: BEST MANAGEMENT PRACTICES FOR EROSION AND SEDIMENTATION CONTROL

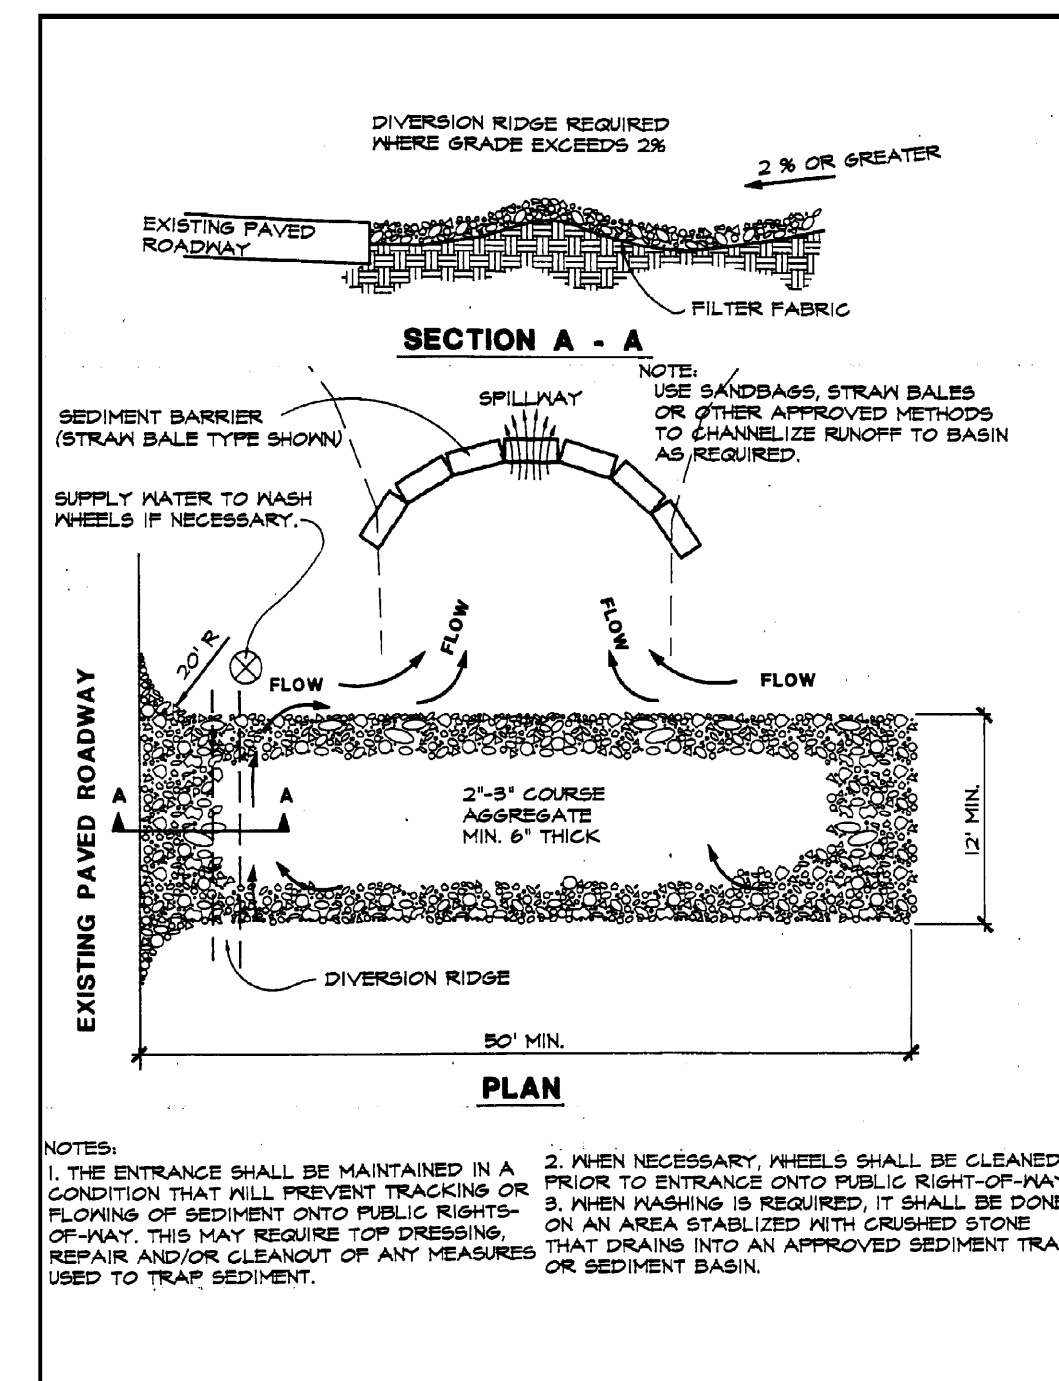


Figure 4.3a. Temporary Gravel Construction Entrance
Source: Erosion Draw