


IRRIGATION SCHEDULE TYPE 1

SYMBOL	MANUFACTURER/MODEL/DESCRIPTION	QTY	PSI	DETAIL
	Rain Bird 1806-PRS 15 Strip Series Turf Spray 6.0" Pop-Up Sprinkler with Co-Molded Wiper Seal. Side and Bottom Inlet. 1/2" NPT Female Threaded Inlet. Pressure Regulating.	1	30	
	Rain Bird 1806-PRS ADJ Turf Spray 6.0" Pop-Up Sprinkler with Co-Molded Wiper Seal. Side and Bottom Inlet. 1/2" NPT Female Threaded Inlet. Pressure Regulating.	21	30	
	Rain Bird 1806-PRS ADJ Turf Spray 6.0" Pop-Up Sprinkler with Co-Molded Wiper Seal. Side and Bottom Inlet. 1/2" NPT Female Threaded Inlet. Pressure Regulating.	54	30	
	Rain Bird 1800-PA-8S-PRS 15 Strip Series Shrub Spray on fixed riser with the PA-8S-PRS Pressure Regulating Shrub Adapter. Use with 1/2" MPT threaded risers.	6	30	
	Rain Bird 1800-PA-8S-PRS ADJ Shrub Spray on fixed riser with the PA-8S-PRS Pressure Regulating Shrub Adapter. Use with 1/2" MPT threaded risers.	8	30	
	Rain Bird 1800-5 Series Stream Stream Bubbler on fixed riser.	17	15	

SYMBOL	MANUFACTURER/MODEL/DESCRIPTION	QTY	DETAIL
	Rain Bird PESB-PRS-D (2) 1" 1in., 1-1/2in., 2in. Plastic Industrial Valves. Low Flow Operating Capability, Globe Configuration. With Pressure Regulating Module, and Scrubber Technology for Reliable Performance in Dirty Water Irrigation Applications.	9	
	Febco 825Y 1" Reduced Pressure Backflow Preventer	1	
	Rain Bird ESP4MEI with (1) ESP-SM6 10 Station, Hybrid Modular Indoor Controller. For Residential or Light Commercial Applications.	1	
	Rain Bird RSD-BEX (2) Rain Sensor, with metal latching bracket, extension wire.	1	
	Water Meter 5/8" 5/8" METER	1	
	Irrigation Lateral Line: PVC Schedule 40 1/2"	746.5 l.f.	
	Irrigation Lateral Line: PVC Schedule 40 3/4"	266.3 l.f.	
	Irrigation Lateral Line: PVC Schedule 40 1"	160.7 l.f.	
	Irrigation Lateral Line: PVC Schedule 40 1 1/4"	118.6 l.f.	
	Irrigation Mainline: PVC Schedule 40-NP 3/4"	92.7 l.f.	
	Irrigation Mainline: PVC Schedule 40-NP 1"	154.9 l.f.	
	Irrigation Mainline: PVC Schedule 40-NP 1 1/4"	22.9 l.f.	
	Pipe Sleeve: PVC Schedule 40 2"	16.2 l.f.	

Valve Callout

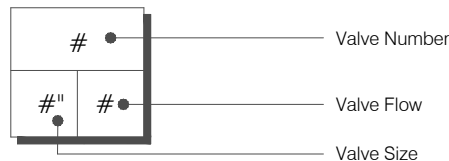

CRITICAL ANALYSIS

Generated: 2025-01-12 01:54

P.O.C. NUMBER: 01
Water Source Information: 5/8" METER

FLOW AVAILABLE
Water Meter Size: 5/8"
Flow Available: 15 GPM

PRESSURE AVAILABLE
Static Pressure at POC: 60 PSI
Elevation Change: 5.00 ft
Service Line Size: 1"
Length of Service Line: 20 ft
Pressure Available: 57 PSI


DESIGN ANALYSIS
Maximum Station Flow: 14.34 GPM
Flow Available at POC: 15 GPM
Residual Flow Available: 0.66 GPM

Critical Station: 5
Design Pressure: 30 PSI
Friction Loss: 2.65 PSI
Fittings Loss: 0.26 PSI
Elevation Loss: 0 PSI
Loss through Valve: 2.28 PSI
Pressure Req. at Critical Station: 35.2 PSI
Loss for Fittings: 0 PSI
Loss for Main Line: 3.75 PSI
Loss for POC to Valve Elevation: 0 PSI
Loss for Backflow: 11.5 PSI
Loss for Water Meter: 7.59 PSI
Critical Station Pressure at POC: 58.1 PSI
Pressure Available: 57 PSI
Residual Pressure Available: -1.06 PSI

SLEEVING SCHEDULE

PIPE SIZE	SLEEVING PIPE SIZE
3/4"	2"
1"	2"
1-1/4"	3"
1-1/2"	3"
2"	4"
3"	6"
4"	8"
6"	12"
8"	16"

FOLIAGE
EXPRESSIONS
8801 SW 192nd Terrace,
Cutler Bay, FL 33157

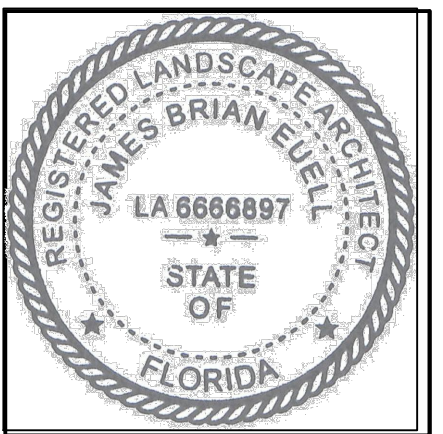

PROPOSED 12 HOUSES

NW 10TH STREET
POMPANO BEACH, FL 33060


PROJECT NAME & LOCATION:

DISTRIBUTION:	DATE:
PERMIT COMMENTS	03-22-24
PERMIT COMMENTS	03-22-24
PERMIT COMMENTS	01-14-25

DRAWING NAME:
HOUSE MODEL-C
AT NW. 11TH STREET
IRRIGATION
PLAN AND SCHEDULE

DRAWING NUMBER:

L-301

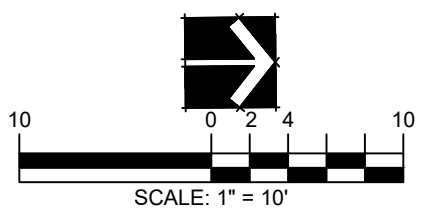

DRC

PZ23-12000051

03/05/2025