



SYMBOL LEGEND ::

XXXXXXXXXXXX

PERIMETER STAKED SILT FENCE
PER FDOT INDEX NO. 102TYPICAL PROPOSED CATCH BASIN
WITH FILTER FABRIC (SEE NOTE 3)TYPICAL STABILIZED ROCK ENTRY DRIVE
PER FDOT INDEX NO. 102

SEDIMENT & EROSION CONTROL NOTES ::

1. CONTRACTOR SHALL INSTALL AND MAINTAIN EROSION CONTROL AND SEDIMENTATION CONTROL MEASURES IN ACCORDANCE WITH THE STANDARDS FOR SOIL EROSION AND SEDIMENT CONTROL IN FLORIDA (HEREAFTER REFERRED TO AS FL. GUIDELINES)
2. MAINTENANCE MEASURES SHALL BE APPLIED AS NEEDED DURING THE ENTIRE CONSTRUCTION CYCLE. AFTER EACH RAINFALL, A VISUAL INSPECTION SHALL BE MADE OF ALL INSTALLED EROSION CONTROL MEASURES AND REPAIRS SHALL BE CONDUCTED TO ENSURE THEIR CONTINUING FUNCTION AS DESIGNED.
3. CATCH BASIN, INLETS AND STORM SEWER MANHOLES, STRUCTURES WITHIN THE SITE WILL BE PROTECTED DURING FILLING OPERATIONS FROM SEDIMENT RUNOFF AND DEBRIS BY PLACING A FILTER FABRIC MATERIAL IN THE FRAME AND GRATE/MANHOLE COVER. PREVENTIVE METHODS MUST BE UTILIZED AROUND THESE STRUCTURES, DURING FILLING OPERATIONS, BY GRADING TO DRAIN AWAY FROM STRUCTURES AND ANY OTHER METHODS APPROVED BY THE COUNTY/MUNICIPAL ENGINEER OR DESIGN ENGINEER OF RECORD.

TYPICAL CATCH BASIN WITH
FILTER FABRIC PROTECTIONPARKING LINES PER
CITY STANDARDS
(DOUBLE LINES, TYP.)

PERIMETER BERM, 17.50 MIN.

ERECT STAKED SILT FENCE
PER FDOT INDEX NO. 102DRAINAGE
RETENTION
AREA

REVISIONS	BY
07-06-2022, REVISED	COB.
PGD PLAN	
08-10-2022, REVISED	COB.
EROSION PLAN	


SITE IMPROVEMENT PLANS FOR
POMPAÑO BEACH AIR PARK - PARCEL Y

1520-1580 NE. 5th AVENUE, POMPAÑO BEACH, FLORIDA 33060

Charles O. Buckalew

Consulting Engineering Services, Inc.
801 South Ocean Drive, Suite 201
Hollywood, Florida 33019
C.O.A. Number: 6255
Tele.: (954) 558-1189 Fax: (954) 929-8988CHARLES O. BUCKALEW, P.E.
FLORIDA REG. NO. 24842

DATE	MAY, 2022
SCALE	1"=30'-0"
BY	C.R.W.
JOB	MA-2285
SHT	EC-1

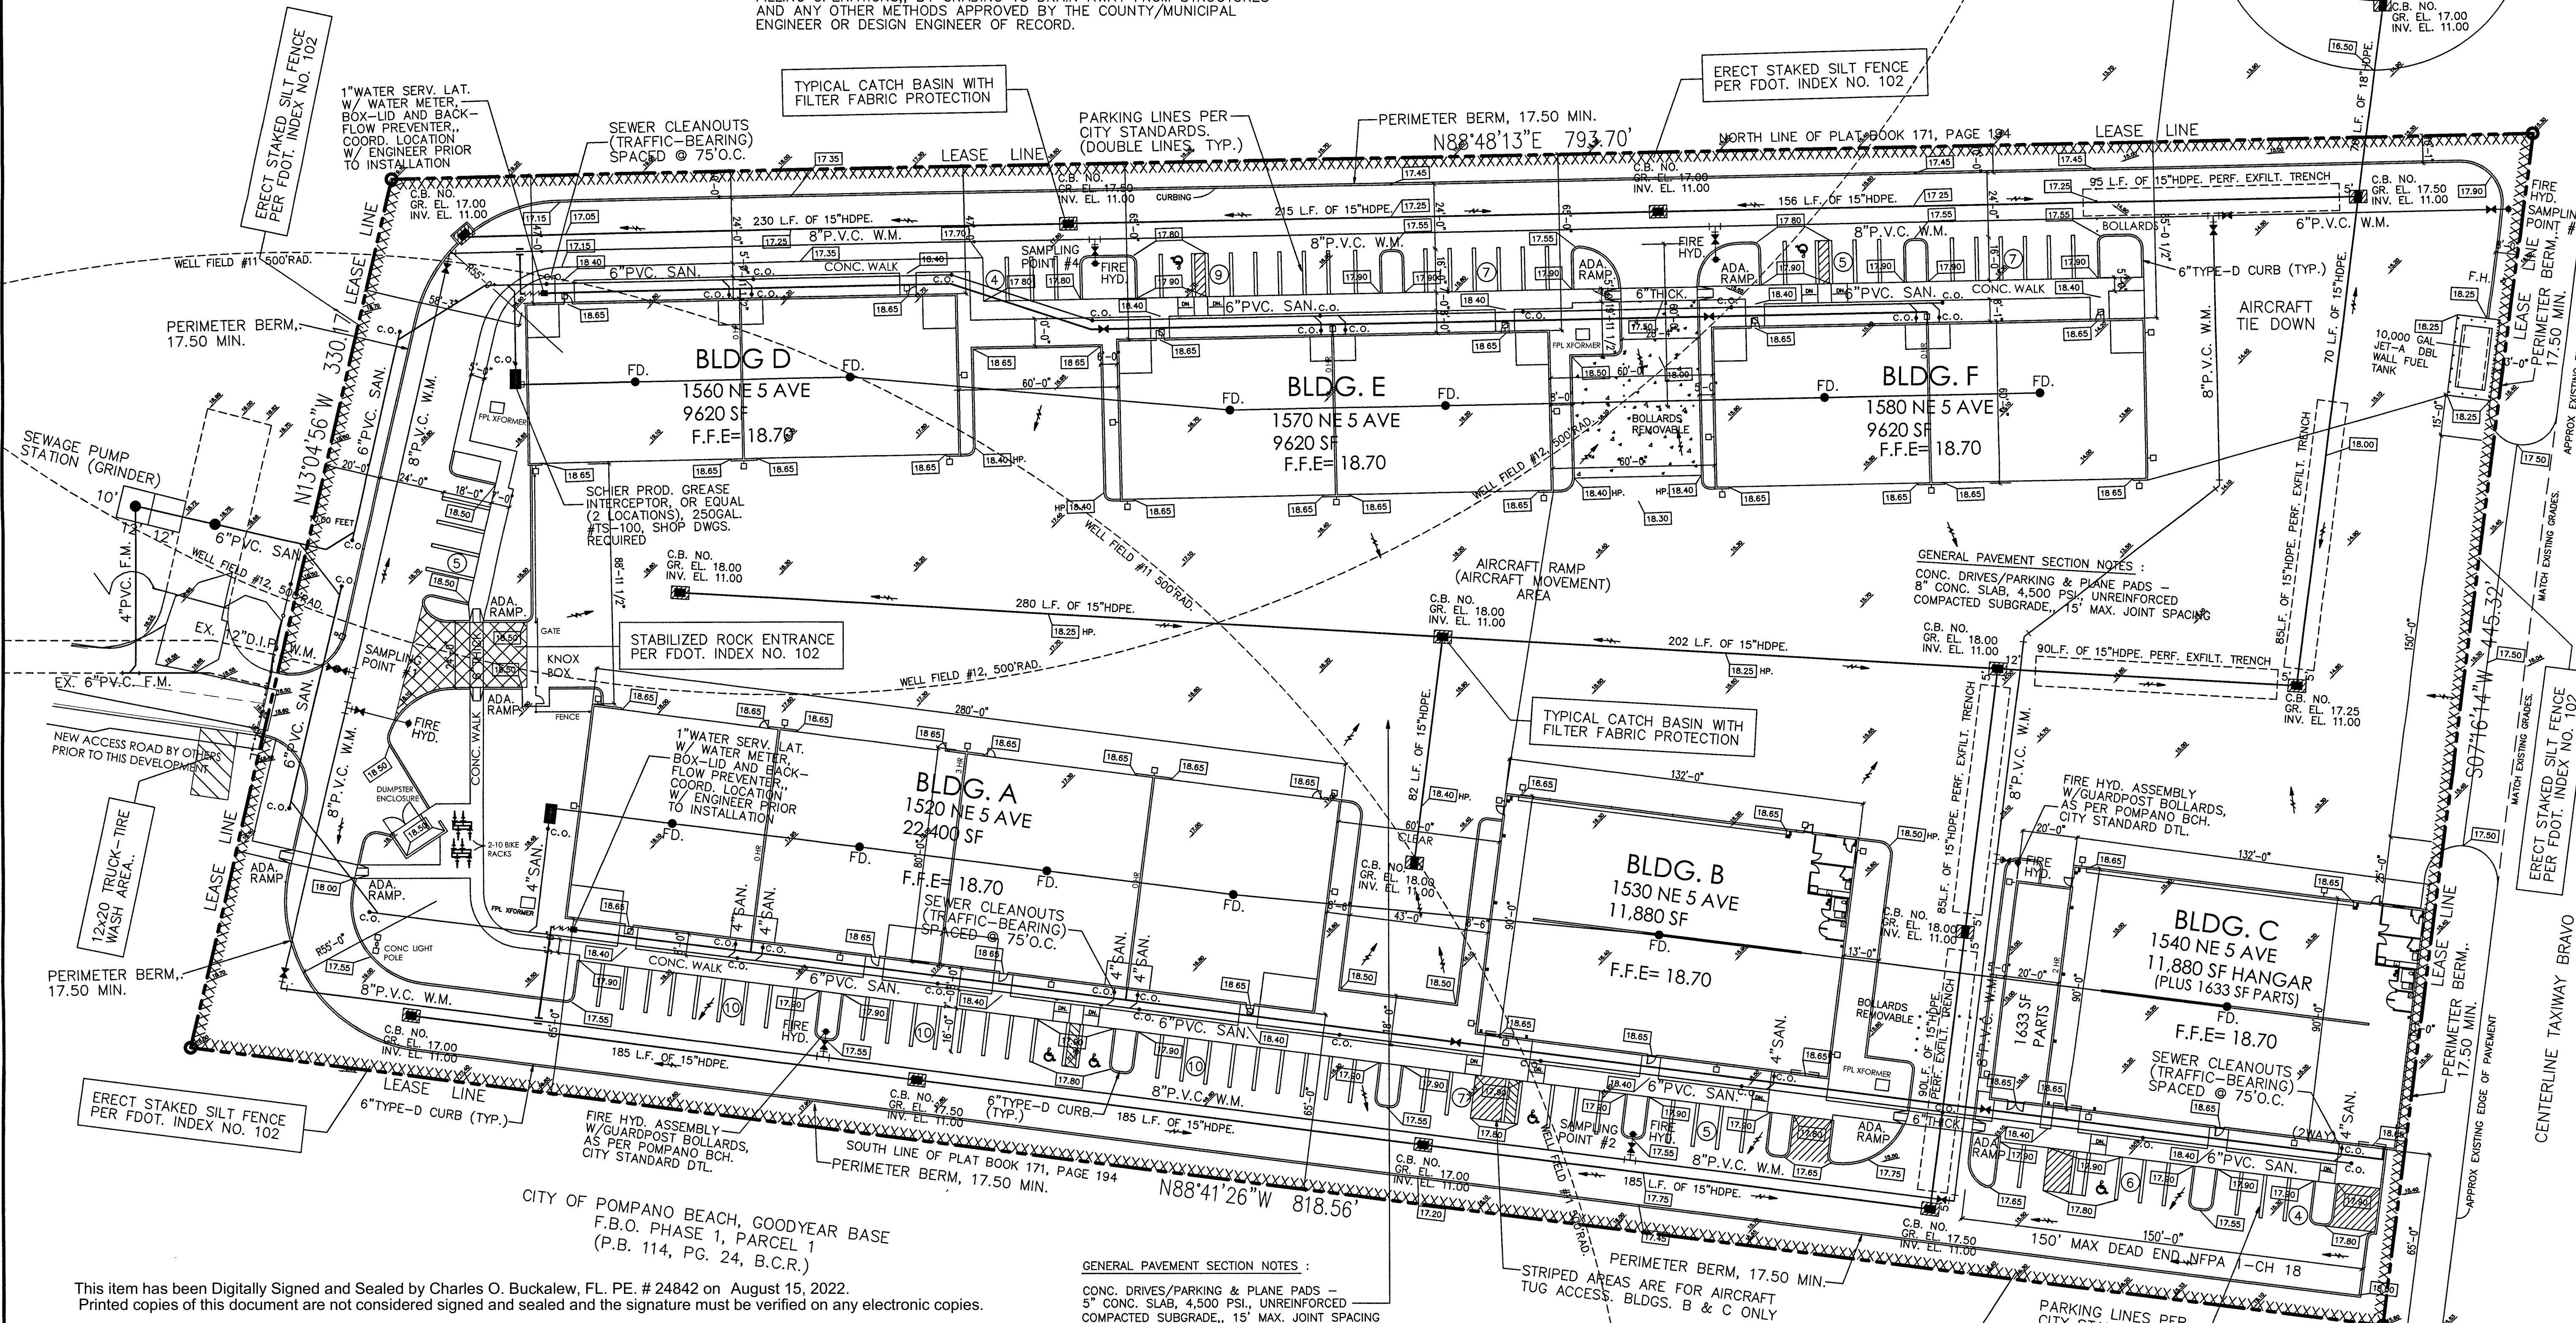


This item has been Digitally Signed and Sealed by Charles O. Buckalew, FL, PE, # 24842 on August 15, 2022.
Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

48 HOURS BEFORE DIGGING

BROWARD • PALM BEACH • INDIAN RIVER
ST. LUCIE • MARTIN COUNTIES
CALL FREE

1-800-432-4770

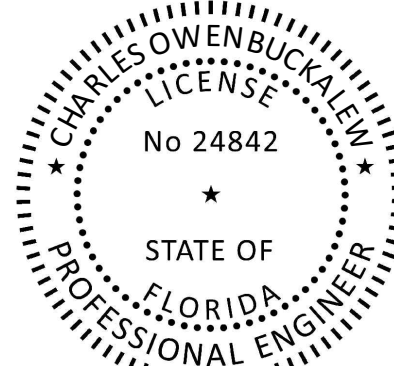S.U., S.H.I., UNDERGROUND UTILITIES
TIFICATION CENTERCharles O. Buckalew
Buckalew Date: 2022.08.15
12:15:22 -04'00'

GENERAL PAVEMENT SECTION NOTES :

CONC. DRIVES/PARKING & PLANE PADS -
5" CONC. SLAB, 4,500 PSI., UNREINFORCED
COMPACTED SUBGRADE, 15' MAX. JOINT SPACING

SIDEWALKS -
4" THK., 4,000 PSI., CONCRETE,
5" COMPACTED SAND SUBGRADE
6" THK., 4,000 PSI., (VEHICULAR TRAFFIC)

CONC. CURBING -
TYPE "D" CONC. CURB, 12" HIGH, 4" WIDE, 4,000 PSI., UNREINFORCED
POMPAÑO BEACH STANDARD SPECIFICATIONS

ASPHALT DRIVES (EXIST. EAS. & SITE)
1 1/4" TYPE S, ASPHALT
12" COMPACTED SUBGRADE MIN. BR.-40,
COMPACTED TO 1% OF SHTO -180.

DRC

PZ22-12000020

9/21/2022

024 EROSION CONTROL PLAN

PZ22-12000020

10/19/2022