TREE DISPOSITION TABLE

TREE #	COMMON NAME	SCIENTIFIC NAME	DBH (INCHES)	HT (FT) TREE (CT) PALM	CANOPY SPREAD (FT)	TREE CONDITION (%)	TREE DISPOSITION	TREE APPRAISAL/ MITIGATION (DBH INCHES)	COMMENTS
21389	AUSTRALIAN PINE	*Casuarina glauca*	50	40	60	60%	**REMOVE**	N/A	MT
21390	CABBAGE PALM	*Sabal palmetto*	10	17	10	60%	**REMOVE**	PALM	
21391	CABBAGE PALM	*Sabal palmetto*	10	15	10	60%	**REMOVE**	PALM	VINES
21392	CABBAGE PALM	*Sabal palmetto*	10	22	10	60%	**REMOVE**	PALM	
21393	CABBAGE PALM	*Sabal palmetto*	10	17	10	60%	**REMOVE**	PALM	
21394	STRANGLER FIG	*Ficus aurea*	45	22	35	35%	**REMOVE**	$5,359	
21395	LIVE OAK	*Quercus virginiana*	49	34	60	60%	**REMOVE**	$11,025	
21396	LIVE OAK	*Quercus virginiana*	30	30	45	60%	**REMOVE**	$6,750	
21397	MANGO	*Mangifera indica*	30	30	30	60%	**REMOVE**	$1,800	
21400	MADRAS THORN	*Pithecellobium dulce*	46	40	65	60%	**REMOVE**	46	
21401	CABBAGE PALM	*Sabal palmetto*	10	20	10	60%	**REMOVE**	PALM	
21402	STRANGLER FIG	*Ficus aurea*	65	30	30	50%	**REMOVE**	$11,059	
21403	AUSTRALIAN PINE	*Casuarina glauca*	36	38	30	50%	**REMOVE**	N/A	
21404	AUSTRALIAN PINE	*Casuarina glauca*	18	22	20	60%	**REMOVE**	N/A	
21405	STRANGLER FIG	*Ficus aurea*	60	34	40	50%	**REMOVE**	$10,208	
21409	MANGO	*Mangifera indica*	24	23	28	60%	**REMOVE**	$1,440	
21410	CABBAGE PALM	*Sabal palmetto*	10	5	10	60%	**REMOVE**	PALM	
21411	MANGO	*Mangifera indica*	14	28	20	60%	**REMOVE**	14	
21494	STRANGLER FIG	*Ficus aurea*	85	34	60	30%	**REMOVE**	$8,677	
21495	CABBAGE PALM	*Sabal palmetto*	10	17	10	60%	**REMOVE**	PALM	
A10	CABBAGE PALM	*Sabal palmetto*	10	10	10	60%	**REMOVE**	PALM	
A9	SILVER BUTTONWOOD	*Conocarpus erectus sericeus*	14	20	20	60%	**REMAIN**	14	

ABBREVIATIONS LEGEND	
B CAV	BRANCH CAVITY
B DMG	BRANCH DAMAGE
CB	CROSSING BRANCHES
CO-D	CO-DOMINANT
CON	CONSTRICTION
D	DECAY
DB	DIEBACK
DL	DUAL LEADER
FB	FUNGUS BODIES
IB	INCLUDED BARK
I DMG	INSECT DAMAGE
L	LEANING
MT	MULTI-TRUNK
NL	NO MAIN LEADER
OHE	OVERHEAD UTILITIES
RA	ROOT AREA INSUFFICIENT
R DMG	ROOT DAMAGE
S	SUCKER GROWTH
T CAV	TRUNK CAVITY
T DMG	TRUNK DAMAGE
UP	UTILITY PRUNED
W CPY	WEAK CANOPY

TREE REMOVAL SUMMARY	
((1)caliper inch required per (1)DBH inch removed, Non-Specimen) TOTAL DBH TO BE REMOVED	**1,027**
TOTAL DOLLAR VALUE OF SPECIMEN TREES TO BE REMOVED	$86,197.00
TOTAL QTY OF PALMS TO BE REMOVED	97
TOTAL QTY OF PALMS TO BE RELOCATED	31

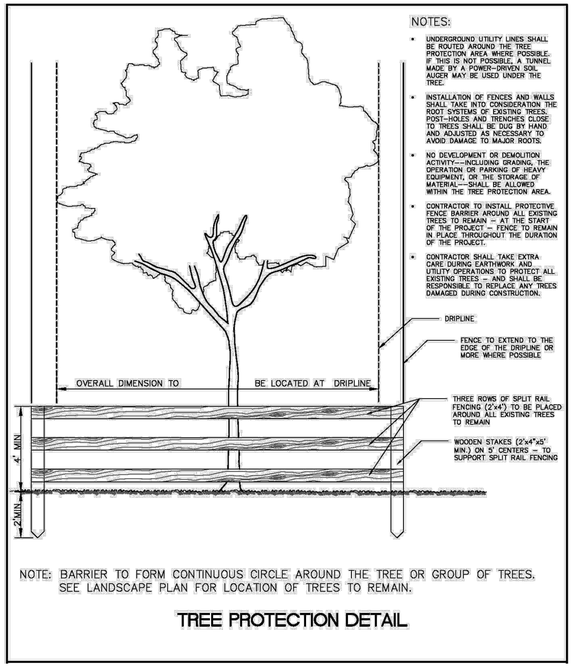

1 TEMPORARY TREE PROTECTION - COPB DETAIL

PLAN / SECTION — NOT TO SCALE

KEITH
301 East Atlantic Blvd.
Pompano Beach, FL 33060
PH: (954) 788-3400
Florida Engineering Business License: CA7928
Florida Surveyor and Mapper Business License: LB6860
Florida Landscape Architecture Business License: LC26000457

REVISIONS

NO.	DESCRIPTION	DATE

PRELIMINARY PLAN
NOT FOR CONSTRUCTION

THESE PLANS ARE NOT FULLY PERMITTED AND ARE SUBJECT TO REVISIONS MADE DURING THE PERMITTING PROCESS.

RESPONSIBILITY FOR THE USE OF THESE PLANS PRIOR TO OBTAINING PERMITS FROM ALL AGENCIES HAVING JURISDICTION OVER THE PROJECT WILL FALL SOLELY UPON THE USER.

ISSUE DATE:	02/25/2026
DESIGNED BY:	SL, KU
DRAWN BY:	KU, EZ
CHECKED BY:	SL, KU
BID-CONTRACT:	

This item has been digitally signed and sealed by Paul H. Weinberg, on the date below using a Digital Signature.

REGISTERED LANDSCAPE ARCHITECT — PAUL H. WEINBERG — LA 6666804 — STATE OF FLORIDA

Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

Date: 2026.07.01 14:25:46-04'00'

PAUL H. WEINBERG, PLA
FLORIDA REG. NO. LA6666804
(FOR THE FIRM)

CLIENT
RP POMPANO LLC

PROJECT
DOWNTOWN POMPANO

SHEET TITLE
TREE DISPOSITION NOTES

SHEET NUMBER: LD-004

PROJECT NUMBER: 15083.00

STATUS: PRELIMINARY

Plotted by: kurena On 6/30/2026 9:41 AM

Drawing name: H:\15083.00 - Downtown Pompano - RP Development LLC\Landscape Architecture\CAD\15083.00-LD-001.dwg

DRC
PZ26-12000001
08/05/2026